

Integrations

Alert Rules

V5.4.16

CONTENTS

1	Alert Rules	2
2	MITRE ATT&CK Analytics	4
2.1	LP_CVE-2024-38112 Exploitation Detected	4
2.2	LP_Certipy Tool Execution for AD CS Abuse	4
2.3	LP_Certify Tool Execution for AD CS Abuse	5
2.4	LP_Password Dumper Activity on LSASS	5
2.5	LP_Disabling of UAC Detected	6
2.6	LP_Behavior Related to Named Pipe Impersonation	6
2.7	LP_Usage of Ngrok Utility Detected	7
2.8	LP_Chrome Addition of VPN Extension	7
2.9	LP_Outlook Security Settings Change	8
2.10	LP_Suspicious Certutil Command Detected	8
2.11	LP_Unsigned DLLs loaded by RunDLL32 or RegSvr32	9
2.12	LP_Terminal Service Configuration Modified	9
2.13	LP_System Service Reconnaissance through WMI	10
2.14	LP_Process Reconnaissance through WMI	10
2.15	LP_Process Created through WMI	10
2.16	LP_Local Users Reconnaissance through WMI	11
2.17	LP_Installed Software Updates Reconnaissance through WMI	11
2.18	LP_Application uninstall via WMIC	12
2.19	LP_AppInit DLLs Detected	12
2.20	LP_High Severity EPP Alert	13
2.21	LP_Host Generating Multiple Medium Severity EPP Alert	13
2.22	LP_Host Generating Multiple High Severity EPP Alert	14
2.23	LP_Medium Severity EPP Alert	14
2.24	LP_Windows Service Stop or Delete	14
2.25	LP_Suspicious Hack Tools Execution	15
2.26	LP_Suspicious Execution of XORDump Utility for LSASS Memory Dump	15
2.27	LP_Suspicious Execution of Createdump Utility for Memory Dump	16
2.28	LP_Suspicious DsInternals Get-ADReplAccount Activities	16
2.29	LP_Suspicious Activities Associated with NTDS Exfiltration	17
2.30	LP_Possible LSASS Memory Dump Via Windows Task Manager	17

2.31	LP_Possible LSASS Dump Via SilentProcessExit Technique	18
2.32	LP_NTDS or SAM Database Copy Operation	18
2.33	LP_Microsoft IIS Service Account Password Dumped	19
2.34	LP_Dumpert Process Dumper Execution	19
2.35	LP_Credential Dump Via NPPSpy	20
2.36	LP_Malicious PowerShell Commandlets Detected	20
2.37	LP_Suspicious Base64 Encoded PowerShell Command	21
2.38	LP_Code Execution Via Diskshadow Detected	22
2.39	LP_Image Mount Indicator in Recent Files	22
2.40	LP_Disk Image File Created	23
2.41	LP_PowerShell Execution via DLL Detected	23
2.42	LP_Suspicious Windows Defender Registry keys Modification	24
2.43	LP_Executable Files Created and Executed by Office Applications	24
2.44	LP_WMI Backdoor in Exchange Transport Agent	25
2.45	LP_Suspicious Msiexec Usage Detected	25
2.46	LP_Suspicious Usage of Advanced IP Scanner	26
2.47	LP_Persistence through Port Monitor Registry modification	26
2.48	LP_File Dropped in Suspicious Location	27
2.49	LP_Alternate PowerShell Hosts via Powershell Module	27
2.50	LP_Suspicious Usage of Where Binary	28
2.51	LP_MSHTA - Activity Detected	28
2.52	LP_Alternate PowerShell Hosts via Named Pipe	29
2.53	LP_Suspicious File Execution Using Wcript or Cscript	29
2.54	LP_Suspicious Child Process Spawned by Microsoft Office Product	30
2.55	LP_RClone Utility Execution	31
2.56	LP_UAC Bypass via SDCLT	31
2.57	LP_Suspicious Binary Execution in User Directory	32
2.58	LP_Suspicious WMIC Child Process	32
2.59	LP_Suspicious File Execution Using Wscript or Cscript	33
2.60	LP_BCDEdit Safe Mode Command Execution	33
2.61	LP_Suspicious Encoded PowerShell Command Line	34
2.62	LP_Persistence Attack through Accessibility Process Feature	34
2.63	LP_Firewall Rule Addition via Netsh Detected	35
2.64	LP_MSHTA Spawned by SVCHOST Detected	35
2.65	LP_Exploitation of CVE-2019-1388 Detected	35
2.66	LP_Sophos EPP Registry Modification	36
2.67	LP_Office365 Inbox Rule with Special Characters Created	36
2.68	LP_Suspicious WerFault Process Creation	37
2.69	LP_Suspicious WerFault File Creation	37
2.70	LP_Snake Malware Covert Store Registry Key Detected	38
2.71	LP_Suspicious WerFault Service Creation	38
2.72	LP_Suspicious Named Pipe Connection to Azure AD Connect Database	39
2.73	LP_Suspicious Driver Loaded	39
2.74	LP_AADInternals PowerShell Cmdlet Execution	39
2.75	LP_Suspicious Scheduled Task Creation via Masqueraded XML File	40

2.76	LP_Suspicious Microsoft Equation Editor Child Process	40
2.77	LP_Windows Error Process Masquerading	41
2.78	LP_Bypass UAC via CMSTP Detected	41
2.79	LP_Application Whitelisting Bypass via Dxcap Detected	42
2.80	LP_Suspicious WMIC XSL Script Execution	42
2.81	LP_Suspicious File Execution via MSHTA	43
2.82	LP_Regsvr32 Anomalous Activity Detected	43
2.83	LP_Execution of Trojanized 3CX Application	44
2.84	LP_Msbuild Spawned by Unusual Parent Process	44
2.85	LP_Suspicious Files Designated as System Files Detected	45
2.86	LP_Bypass User Account Control using Registry	45
2.87	LP_Unsigned Image Loaded Into LSASS Process	46
2.88	LP_Usage of Sysinternals Tools Detected	46
2.89	LP_Microsoft SharePoint Remote Code Execution Detected	46
2.90	LP_DenyAllWAF SQL Injection Attack	47
2.91	LP_Malicious use of Scriptrunner Detected	47
2.92	LP_Suspicious process related to Rundll32 Detected	48
2.93	LP_Javascript conversion to executable Detected	48
2.94	LP_Suspicious Execution of Gpscript Detected	49
2.95	LP_Proxy Execution via Desktop Setting Control Panel	49
2.96	LP_Xwizard DLL Side Loading Detected	49
2.97	LP_DLL Side Loading Via Microsoft Defender	50
2.98	LP_ZIP File Creation or Extraction via Printer Migration CLI Tool	50
2.99	LP_Credentials Capture via Rpcping Detected	51
2.100	LP_Suspicious ConfigSecurityPolicy Execution Detected	51
2.101	LP_C-Sharp Code Compilation Using Ilasm Detected	52
2.102	LP_Process Dump via Resource Leak Diagnostic Tool	52
2.103	LP_Suspicious DLL execution via Register-Cimprovider	52
2.104	Accessibility features - Process	53
2.105	LP_Accessibility Features-Registry	53
2.106	LP_Active Directory DLLs Loaded By Office Applications	54
2.107	LP_DCSync detected	54
2.108	LP_Active Directory Replication User Backdoor	55
2.109	LP_Activity Related to NTDS Domain Hash Retrieval	55
2.110	LP_AD Object WriteDAC Access Detected	56
2.111	LP_AD Privileged Users or Groups Reconnaissance Detected	56
2.112	LP_Addition of SID History to Active Directory Object	57
2.113	LP_Admin User Remote Logon Detected	57
2.114	LP_Adwind RAT JRAT Detected	57
2.115	LP_Apache Struts 2 Remote Code Execution Detected	58
2.116	LP_AppCert DLLs Detected	58
2.117	LP_Application Shimming - File Access Detected	59
2.118	LP_Application Whitelisting Bypass via Dnx Detected	59
2.119	LP_Audio Capture Detected	60
2.120	LP_Authentication Package Detected	60

2.121LP_Autorun Keys Modification Detected	61
2.122LP_Bloodhound and Sharphound Hack Tool Detected	61
2.123LP_BlueMushroom DLL Load Detected	62
2.124LP_Remote Thread Creation via Cactustorch	62
2.125LP_Call to a Privileged Service Failed	63
2.126LP_Capture a Network Trace with netsh	63
2.127LP_CEO Fraud - Possible Fraudulent Email Behavior	63
2.128LP_Certutil Encode Detected	64
2.129LP_Change of Default File Association Detected	64
2.130LP_Citrix ADC VPN Directory Traversal Detected	65
2.131LP_Clear Command History	65
2.132LP_Clearing of PowerShell Logs Detected	66
2.133LP_Clipboard Data Access Detected	66
2.134LP_Cmdkey Cached Credentials Recon Detected	67
2.135LP_CMSTP Detected	67
2.136LP_CMSTP Execution Detected	67
2.137LP_CMSTP UAC Bypass via COM Object Access	68
2.138LP_CobaltStrike Process Injection Detected	68
2.139LP_Windows Command Line Execution with Suspicious URL and AppData Strings	69
2.140LP_Compiled HTML File Detected	69
2.141LP_Console History Discovery Detected	70
2.142LP_Control Panel Items - Registry Detected	70
2.143LP_Copy from Admin Share Detected	71
2.144LP_Copyright Violation Email	71
2.145LP_CreateMiniDump Hacktool Detected	72
2.146LP_CreateRemoteThread API and LoadLibrary	72
2.147LP_Command Obfuscation via Character Insertion	72
2.148LP_Command Obfuscation via Environment Variable Concatenation Reassembly	73
2.149LP_Credential Access via Input Prompt Detected	73
2.150LP_Credential Dump Tools Dropped Files Detected	74
2.151LP_Credential Dumping with ImageLoad Detected	74
2.152LP_Credentials Access in Files Detected	75
2.153LP_Registry Enumeration for credentials Detected	75
2.154LP_Default Account privilege elevation followed by restoration of previous account state	76
2.155LP_Default Blocked Inbound Traffic followed by Allowed Event	76
2.156LP_Default Blocked Outbound Traffic followed by Allowed Event	77
2.157LP_Default Brute Force Attack Successful	77
2.158LP_Default Connection Attempts on Closed Port	78
2.159LP_Default CPU Usage Status	78
2.160LP_Default Device Stopped Sending Logs for Half an Hour	78
2.161LP_Default DNS Tunneling Detection - Query Size	79
2.162LP_Default Excessive Blocked Connections	79

2.163LP_Default File Association Changed	80
2.164LP_Default Guest Account Added to Administrative Group	80
2.165LP_Default IRC connection	81
2.166LP_Default Malware Detected	81
2.167LP_Default Malware not Cleaned	81
2.168LP_Default Malware Removed	82
2.169LP_Default Memory Usage Status	82
2.170LP_Default Network Configuration Change on Network Device	83
2.171LP_Default Port Scan Detected	83
2.172LP_Default Possible Cross Site Scripting Attack Detected	84
2.173LP_Default Possible Non-PCI Compliant Inbound Network Traffic Detected	84
2.174LP_Default Possible SQL Injection Attack	85
2.175LP_Default Possible System Instability State Detected	85
2.176LP_Default PowerSploit and Empire Schtasks Persistence	85
2.177LP_Default Successful Login outside Normal Hour	86
2.178LP_Default Successful Login Using a Default Account	86
2.179LP_Default System Time Change	87
2.180LP_Default TCP Probable SynFlood Attack	87
2.181LP_Default Unapproved Port Activity Detected	88
2.182LP_Default Unusual Number of Failed Vendor User Login	88
2.183LP_HandleKatz Duplicating LSASS Handle	89
2.184LP_PowerShell Execution Policy Modification Detected	89
2.185LP_Devtoolslauncher Executes Specified Binary	89
2.186LP_DHCP Callout DLL Installation Detected	90
2.187LP_DHCP Server Error Failed Loading the CallOut DLL	90
2.188LP_DHCP Server Loaded the CallOut DLL	91
2.189LP_Direct Autorun Keys Modification Detected	91
2.190LP_Disable of ETW Trace	92
2.191LP_MiniNt Registry Key Addition	92
2.192LP_Execution of Base64 Encoded Command Using IEX	93
2.193LP_Discovery via PowerSploit Recon Module	94
2.194LP_DLL Load via LSASS Detected	94
2.195LP_DNS Server Error Failed Loading the ServerLevelPluginDLL	95
2.196LP_DNS ServerLevelPluginDll Install	95
2.197LP_Domain Trust Discovery Detected	95
2.198LP_dotNET DLL Loaded Via Office Applications	96
2.199LP_DPAPI Domain Backup Key Extraction Detected	96
2.200LP_DPAPI Domain Master Key Backup Attempt	97
2.201LP_Dridex Process Pattern Detected	97
2.202LP_Droppers Exploiting CVE-2017-11882 Detected	98
2.203LP_Drupal Arbitrary Code Execution Detected	98
2.204LP_Elevated Command Prompt Activity by Non-Admin User Detected	98
2.205LP EMC Possible Ransomware Detection	99
2.206LP_Empire PowerShell Launch Parameters	99
2.207LP_Empire PowerShell UAC Bypass Detected	100

2.208LP_Enabled User Right in AD to Control User Objects	100
2.209LP_PowerShell Encoded FromBase64String Detected	101
2.210LP_Encoded PowerShell Command Detected	101
2.211LP_Eventlog Cleared Detected	102
2.212LP_Executables Stored in OneDrive	102
2.213LP_Execution in Non-Executable Folder Detected	102
2.214LP_Execution in Outlook Temp Folder Detected	103
2.215LP_Execution in Webserver Root Folder Detected	103
2.216LP_Execution of Renamed PaExec Detected	104
2.217LP_Execution via Control Panel Items	104
2.218LP_Execution via HTA using IE JavaScript Engine Detected	105
2.219LP_Suspicious Fsutil Invocation	105
2.220LP_High Number of Process Termination	106
2.221LP_Execution via Windows Scripting Host Component Detected	106
2.222LP_Exim MTA Remote Code Execution Vulnerability Detected	107
2.223LP_Exim Remote Command Execution Detected	107
2.224LP_Existing Service Modification Detected	108
2.225LP_External Disk Drive or USB Storage Device Detected	108
2.226LP_Fail2ban IP Banned	108
2.227LP_File Creation by PowerShell Detected	109
2.228LP_File Deletion Detected	109
2.229LP_File or Folder Permissions Modifications	110
2.230LP_File System Permissions Weakness	110
2.231LP_Firewall Disabled via Netsh Detected	111
2.232LP_First Time Seen Remote Named Pipe	111
2.233LP_FirstClass Failed Login Attempt	112
2.234LP_FirstClass Failed Password Change Attempt	112
2.235LP_Formbook Process Creation Detected	113
2.236LP_FortiGate Admin Login Disable	113
2.237LP_FortiGate Anomaly	113
2.238LP_FortiGate Antivirus Botnet Warning	114
2.239LP_FortiGate Antivirus Scan Engine Load Failed	114
2.240LP_FortiGate Attack	115
2.241LP_FortiGate Critical Events	115
2.242LP_FortiGate Data Leak Protection	115
2.243LP_FortiGate IPS Events	116
2.244LP_FortiGate Malicious URL Attack	116
2.245LP_FortiGate Virus	117
2.246LP_FortiGate VPN SSL User Login Failed	117
2.247LP_FSecure File Infection	117
2.248LP_FSecure Virus Detection	118
2.249LP_GAC DLL Loaded Via Office Applications Detected	118
2.250LP_Generic Password Dumper Activity on LSASS Detected	119
2.251LP_Grabbing Sensitive Hives via Reg Utility	119
2.252LP_Hacktool Ruler Detected	120

2.253LP_HH Execution Detected	120
2.254LP_Hidden Files and Directories Detected	121
2.255LP_Hiding Files with Attrib Detected	121
2.256LP_IIS Native-Code Module Command Line Installation	122
2.257LP_In-memory PowerShell Detected	122
2.258LP_Indicator Blocking - Driver Unloaded	123
2.259LP_Indicator Blocking - Sysmon Registry Edited	123
2.260LP_Install Root Certificate	124
2.261LP_Suspicious InstallUtil Execution	124
2.262LP_Invocation of Active Directory Diagnostic Tool Detected	125
2.263LP_Java Running with Remote Debugging	125
2.264LP_Judgement Panda Exfil Activity	125
2.265LP_JunOS Attack	126
2.266LP_JunOS Authentication Failed	126
2.267LP_JunOS Policy Violation	127
2.268LP_JunOS Security Log Clear	127
2.269LP_Kaspersky Antivirus - Outbreak Detection	127
2.270LP_Kaspersky Antivirus - Update Fail	128
2.271LP_Kaspersky Antivirus Extremely Out of Date Event	128
2.272LP_Kaspersky Antivirus Outbreak Detection by Source	129
2.273LP_Kaspersky Antivirus Outbreak Detection by Virus	129
2.274LP_Kaspersky Antivirus Threat Affecting Multiple Host	130
2.275LP_Kernel Firewall Connection Denied	130
2.276LP_Koadic Execution Detected	130
2.277LP_Large ICMP Traffic	131
2.278LP_Local Account Creation on Workstation Detected	131
2.279LP_LockCrypt Ransomware	132
2.280LP_Log Files Creation of Dot-Net-to-JS Detected	132
2.281LP_LSASS Access from Non System Account Detected	133
2.282LP_LSASS Memory Dump Detected	133
2.283LP_LSASS Memory Dump File Creation	133
2.284LP_LSSAS Memory Dump with MiniDumpWriteDump API Detected	134
2.285LP_Macro file Creation Detected	134
2.286LP_Malicious Base64 Encoded PowerShell Keywords in Command Lines Detected	135
2.287LP_Malicious File Execution Detected	136
2.288LP_Malicious Service Installations Detected	136
2.289LP_Malware Shellcode in Verclsid Target Process	137
2.290LP_Malware Threat Connection from Malicious Source	137
2.291LP_Malware Threat Connection to Malicious Destination	138
2.292LP_Malware Threat Connection to Malicious URLs	138
2.293LP_Malware Threat Emails Sent to Attacker	138
2.294LP_Meltdown and Spectre Vulnerabilities	139
2.295LP_Meterpreter or Cobalt Strike Getsystem Service Start Detected	139

2.296LP_Microsoft Office Memory Corruption Vulnerability CVE-2017-11882 Detected	140
2.297LP_Mimikatz Command Line Detected	140
2.298LP_Mitre Discovery Using Query Registry Detected	141
2.299LP_Mitre Discovery Using System Network Configuration Discovery Detected	141
2.300LP_Mitre Persistence via Winlogon Helper DLL Detected	142
2.301LP_MMC Spawning Windows Shell Detected	142
2.302LP_Most Exploitable Vulnerabilities Detected	142
2.303LP_Mshta JavaScript Execution Detected	143
2.304LP_MSHTA Spawning Windows Shell Detected	143
2.305LP_MSHTA Suspicious Execution Detected	144
2.306LP_MSTSC Shadowing Detected	144
2.307LP_Multiple Failed Login Followed by Successful Login Followed by Logoff	145
2.308LP_Named Pipe added to Null Session Detected	145
2.309LP_Narrators Feedback-Hub Persistence Detected	146
2.310LP_Net exe Execution Detected	146
2.311LP_NetNTLM Downgrade Attack Detected	147
2.312LP_Netsh Port Forwarding Detected	147
2.313LP_Network Share Connection Removed	148
2.314LP_Network Share Discovery	148
2.315LP_Network Sniffing Detected	149
2.316LP_New Firewall Port Opening Detected	149
2.317LP_New RUN Key Pointing to Suspicious Folder Detected	150
2.318LP_New Service Creation	150
2.319LP_Non Interactive PowerShell Execution	151
2.320LP_NoPowerShell Tool Activity Detected	151
2.321LP_NotPetya Ransomware Activity Detected	152
2.322LP_Office365 Multiple Failed Login from Different Host by Single User .	152
2.323LP_Office365 Multiple Failed Login from Same Host	153
2.324LP_Office365 Multiple Successful Login from Different Country by Single User	153
2.325LP_Office365 Multiple Successful Login From Different Host by Single User	154
2.326LP_Office365 Password Resets	154
2.327LP_OpenWith Execution of Specified Binary Detected	154
2.328LP_Password Change on DSRM Account Detected	155
2.329LP_Password Dumper Remote Thread in LSASS	155
2.330LP_Password Spraying Attack Detected	156
2.331LP_Persistence and Execution at Scale via GPO Scheduled Task	156
2.332LP_Possible Access to ADMIN Share	157
2.333LP_Possible Account Misuse-Privilege Escalation	157
2.334LP_Possible Applocker Bypass Detected	157
2.335LP_File Download via Bitsadmin Detected	158
2.336LP_Possible Botnet Connection-DNS Server Modified	158
2.337LP_Possible CLR DLL Loaded Via Office Applications	159

2.338LP_Credential Dumping Tools Named Pipes Detected	159
2.339LP_Possible Data Breach	160
2.340LP_Possible Data Breach-Off Hour Transfer	160
2.341LP_Possible DDOS Attack	161
2.342LP_Possible Detection of SafetyKatz	161
2.343LP_Possible DNS Rebinding Detected	162
2.344LP_Possible Empire Monkey Detected	162
2.345LP_Possible Impacket Lateral Movement Detected	163
2.346LP_Possible Impacket SecretDump Remote Activity	163
2.347LP_Possible Inbound Spamming Detected	164
2.348LP_Possible Insider Threat	164
2.349LP_Malicious Payload Download via Office Binaries	164
2.350LP_Reconnaissance using Windows Binaries Detected	165
2.351LP_PowerShell Script Execution from Suspicious Location	165
2.352LP_Possible Malware Detected	166
2.353LP_Possible Modification of Boot Configuration	166
2.354LP_Possible Outbound Spamming Detected	167
2.355LP_Possible Pass the Hash Activity Detected	167
2.356LP_Possible Privilege Escalation via Weak Service Permissions	168
2.357LP_Possible Process Hollowing Image Loading	168
2.358LP_Possible SPN Enumeration Detected	169
2.359LP_Possible SquiblyTwo Detected	169
2.360LP_Possible Taskmgr run as LOCAL_SYSTEM Detected	169
2.361LP_Powershell AMSI Bypass via dotNET Reflection	170
2.362LP_PowerShell Base64 Encoded Shellcode Detected	170
2.363LP_PowerShell Network Connections Detected	171
2.364LP_PowerShell Profile Modification	171
2.365LP_PowerShell Rundll32 Remote Thread Creation Detected	172
2.366LP_PowerShell Version Downgrade Detected	172
2.367LP_Process Dump via Comsvcs DLL Detected	172
2.368LP_Process Dump via Rundll32 and Comsvcs Detected	173
2.369LP_Process Hollowing Detected	173
2.370LP_Process Injection Detected	174
2.371LP_Protected Storage Service Access Detected	174
2.372LP_PsExec Tool Execution Detected	175
2.373LP_Psr Capture Screenshots Detected	175
2.374LP_Pulse Secure Arbitrary File Reading Detected	176
2.375LP_Query Registry Network	176
2.376LP_Rare Scheduled Task Creations Detected	176
2.377LP_RDP Login from Localhost Detected	177
2.378LP_RDP Over Reverse SSH Tunnel Detected	177
2.379LP_RDP Registry Modification	178
2.380LP_RDP Sensitive Settings Changed	178
2.381LP_Reconnaissance Activity with Net Command	179
2.382LP_RedSocks Backdoor Connection	179

2.383LP_RedSocks Bad Neighborhood Detection	180
2.384LP_RedSocks Blacklist URL Detection	180
2.385LP_RedSocks FileSharing	180
2.386LP_RedSocks Ransomware Connection	181
2.387LP_RedSocks Sinkhole Detection	181
2.388LP_RedSocks Tor Connection	182
2.389LP_RedSocks Trojan Connection	182
2.390LP_Register new Logon Process by Rubeus	182
2.391LP_Registry Persistence Mechanisms Detected	183
2.392LP_Regsvcs-Regasm Detected	183
2.393LP_Remote PowerShell Session	184
2.394LP_Remote System Discovery	184
2.395LP_Renamed Binary Detected	185
2.396LP_Renamed PsExec Detected	185
2.397LP_Rogue Access Point Detected	186
2.398LP_RSA SecurID Account Lockout	186
2.399LP_RSA SecurID Account Lockout	186
2.400LP_Rubeus Hack Tool Detected	187
2.401LP_Run PowerShell Script from ADS Detected	187
2.402LP_Rundll32 Internet Connection Detected	188
2.403LP_Scheduled Task Creation Detected	188
2.404LP_SCM Database Handle Failure Detected	189
2.405LP_SCM Database Privileged Operation Detected	189
2.406LP_Screensaver Activities Detected	189
2.407LP_Secure Deletion with SDelete	190
2.408LP_SecurityXploded Tool Detected	190
2.409LP_smbexec Service Installation Detected	191
2.410LP_SolarisLDAP Group Remove from LDAP Detected	191
2.411LP_SolarisLDAP Password Spraying Attack Detected	192
2.412LP_SolarisLDAP Possible Bruteforce Attack Detected	192
2.413LP_SolarisLDAP Successful Bruteforce Attack Detected	193
2.414LP_SolarisLDAP User Account Lockout Detected	193
2.415LP_Sophos XG Firewall - Inbound Attack Detected by IDP	194
2.416LP_Sophos XG Firewall - Outbound Attack Detected by IDP	194
2.417LP_SophosUTM Policy Violation	194
2.418LP_SSHD Connection Denied	195
2.419LP_Stealthy Scheduled Task Creation via VBA Macro Detected	196
2.420LP_Sticky Key Like Backdoor Usage Detected	196
2.421LP_Stop Windows Service Detected	197
2.422LP_Successful Lateral Movement to Administrator via Pass the Hash using Mimikatz Detected	198
2.423LP_Successful Overpass the Hash Attempt	198
2.424LP_Suspect Svchost Memory Access	199
2.425LP_Suspicious Access to Sensitive File Extensions	199
2.426LP_Suspicious Calculator Usage Detected	200

2.427LP_Suspicious Call by Ordinal Detected	200
2.428LP_Suspicious Code Page Switch Detected	201
2.429LP_Suspicious Compression Tool Parameters	201
2.430LP_Suspicious Control Panel DLL Load Detected	202
2.431LP_Suspicious Csc Source File Folder Detected	202
2.432LP_Suspicious Debugger Registration Detected	203
2.433LP_Suspicious Double Extension Detected	204
2.434LP_Suspicious Driver Load from Temp	204
2.435LP_Suspicious Eventlog Clear or Configuration Using Wevtutil Detected .	205
2.436LP_Suspicious Execution from Outlook	205
2.437LP_Suspicious GUP Usage Detected	206
2.438LP_Suspicious HWP Sub Processes Detected	206
2.439LP_Suspicious Kerberos RC4 Ticket Encryption	207
2.440LP_Suspicious Named Pipes Detected	207
2.441LP_Suspicious Outbound Kerberos Connection	208
2.442LP_Suspicious Outbound RDP Connections Detected	208
2.443LP_Suspicious Parent of Csc Detected	209
2.444LP_Suspicious PowerShell Invocation Based on Parent Process	209
2.445LP_Suspicious PowerShell Parameter Substring Detected	210
2.446LP_Suspicious Process Start Locations Detected	210
2.447LP_Suspicious Program Location with Network Connections	211
2.448LP_Suspicious PsExec Execution Detected	211
2.449LP_Suspicious RDP Redirect Using TSCON Detected	212
2.450LP_Suspicious Remote Thread Created	212
2.451LP_Suspicious RUN Key from Download Detected	213
2.452LP_Suspicious Rundll32 Activity Detected	213
2.453LP_Suspicious Scripting in a WMI Consumer	214
2.454LP_Suspicious Service Path Modification Detected	215
2.455LP_Suspicious Svchost Process Detected	215
2.456LP_Suspicious TSCON Start	216
2.457LP_Potential Suspicious Malware Callback Communication	216
2.458LP_Suspicious CSharp or FSharp Interactive Console Execution	217
2.459LP_Suspicious Userinit Child Process	217
2.460LP_Suspicious Windows ANONYMOUS LOGON Local Account Creation	218
2.461LP_Suspicious WMI Execution Detected	218
2.462LP_SysKey Registry Keys Access	219
2.463LP_Sysmon Configuration Modification Detected	219
2.464LP_Sysmon Driver Unload Detected	219
2.465LP_Sysmon Error Event Detected	220
2.466LP_System File Execution Location Anomaly Detected	220
2.467LP_System Service Discovery	221
2.468LP_Tap Driver Installation Detected	221
2.469LP_Tasks Folder Evasion Detected	222
2.470LP_Terminal Service Process Spawn Detected	222
2.471LP_Threat Intel Allowed Connections from Suspicious Sources	223

2.472LP_Threat Intel Connections with Suspicious Domains	223
2.473LP_Time-Stomping of Users Directory Files Detected	224
2.474LP_Transferring Files with Credential Data via Network Shares	224
2.475LP_TrendMicroDeepSecurity Virus Quarantined	225
2.476LP_UAC Bypass via Event Viewer Detected	225
2.477LP_Unix Possible Bruteforce Attack	225
2.478LP_Unix User Deleted	226
2.479LP_Unsigned Driver Loading Detected	226
2.480LP_Possible Ursnif Registry Activity	227
2.481LP_VBA DLL Loaded by Office	227
2.482LP_VM - High Risk Vulnerability on High Impact Assets	227
2.483LP_VM - High Risk Vulnerability on Low Impact Assets	228
2.484LP_VM - High Risk Vulnerability on Medium Impact Assets	228
2.485LP_VM - Medium Risk Vulnerability on High Impact Assets	229
2.486LP_VM - Medium Risk Vulnerability on Low Impact Assets	229
2.487LP_VM - Medium Risk Vulnerability on Medium Impact Assets	230
2.488LP_WannaCry MS17-010 Vulnerable Sources	230
2.489LP_WannaCry Sources in Connections to Sinkhole Domain	230
2.490LP_WCE wceaux dll Access Detected	231
2.491LP_Wdigest Registry Modification	231
2.492LP_Weak Encryption Enabled for User	232
2.493LP_Potential Webshell Activity Detected	232
2.494LP_Windows Audit Logs Cleared	233
2.495LP_Windows Data Copied to Removable Device	233
2.496LP_Windows Defender Antivirus Disable via Registry Modification	233
2.497LP_Shadow Copy Deletion Using OS Utilities Detected	234
2.498LP_Windows Defender Exclusion Set Detected	235
2.499LP_Windows Excessive Amount of Files Copied to Removable Device	236
2.500LP_Windows Failed Login Attempt Using Service Account	236
2.501LP_Windows Failed Login Followed by Lockout Event	237
2.502LP_Windows Local User Management	237
2.503LP_WMI DLL Loaded by Office	238
2.504LP_Windows Processes Suspicious Parent Directory Detected	238
2.505LP_Windows Registry Persistence COM Key Linking Detected	239
2.506LP_Windows Shell Spawning Suspicious Program	239
2.507LP_Windows User Account Created via Command Line	240
2.508LP_Windows User Account Change to End with Dollar Sign	240
2.509LP_Windows Webshell Creation Detected	241
2.510LP_Winlogon Helper DLL	241
2.511LP_WMI Backdoor Exchange Transport Agent	242
2.512LP_WMI Modules Loaded by Suspicious Process	242
2.513LP_WMI Persistence - Script Event Consumer Detected	243
2.514LP_WMI Persistence - Script Event Consumer File Write	243
2.515LP_Wsreset UAC Bypass Detected	244
2.516LP_XSL Script Processing Detected	244

2.517LP_ZOHO Dctask64 Process Injection Detected	245
2.518LP_APT 34 Initial Access Using Spearphishing Link Detected	245
2.519LP_Suspicious File Deletion Detected	246
2.520LP_Security Software Discovery Process Detected	246
2.521LP_System Network Configuration Discovery	247
2.522LP_System Network Connections Discovery	247
2.523LP_Exfiltration over Cloud Application Detected	248
2.524LP_Remote File Copy Detected	248
2.525LP_Privilege Escalation - Bypassing User Account Control Detected	248
2.526LP_Process Execution from Suspicious Location	249
2.527LP_Active Directory Enumeration via ADFind	249
2.528LP_Possible Command Prompt Process Hollowing	250
2.529LP_Suspicious Taskkill Activity	250
2.530LP_Ryuk Wake-On-LAN Activity	251
2.531LP_EXE or DLL Dropped in Perflogs Folder	251
2.532LP_Credential Access via LaZagne	251
2.533LP_RDP Connection Initiated from Domain Controller	252
2.534LP_Active Directory Module Load in PowerShell	252
2.535LP_Possible Active Directory Enumeration via AD Module	253
2.536LP_Microsoft Defender Disabling Attempt via PowerShell	253
2.537LP_Possible Kerberoasting via Rubeus	254
2.538LP_Suspicious Scheduled Task Creation	254
2.539LP_RDP Connection Initiated from Suspicious Country	255
2.540LP_Scheduled Task Deletion	255
2.541LP_Exchange Remote Code Execution CVE-2020-0688 Attempt	256
2.542LP_BlueKeep Vulnerability CVE-2019-0708 Exploitation	256
2.543LP_ZoHo ManageEngine Pre-Auth File Upload CVE-2019-8394 Exploitation Attempt	256
2.544LP_ZoHo ManageEngine Desktop Central CVE-2020-10189 Exploitation Attempt	257
2.545LP_Fortinet Pre-Auth File Read CVE-2018-13379 Exploitation Attempt	257
2.546LP_Adobe ColdFusion Remote Code Execution CVE-2018-15961 Attempt	258
2.547LP_Default Hard disk Usage Status	258
2.548LP_Default License Grace State	259
2.549LP_Default License Invalid	259
2.550LP_Microsoft Build Engine Loading Credential Libraries	259
2.551LP_Potential Phishing Attack Detected	260
2.552LP_Safe DLL Search Mode Disabled	260
2.553LP_Potential Intrusion Detected	261
2.554LP_Windows Crash Dump Disabled	261
2.555LP_Suspicious Shells Spawn by SQL Server	261
2.556LP_Suspicious Microsoft SQL Server PowerShell Module Use Detected	262
2.557LP_UltraVNC Execution via Command Line	262
2.558LP_Office Security Settings Changed	263
2.559LP_Microsoft Defender AMSI Trigger	263

2.560LP_Actinium IoC Domains Detected	264
2.561LP_Suspicious VMToolsd Child Process	264
2.562LP_Impacket PsExec Execution	264
2.563LP_Oracle WebLogic CVE-2021-2109 Exploitation	265
2.564LP_PowerShell ADRecon Execution	265
2.565LP_PowerView PowerShell Commandlets	266
2.566LP_PowerView PowerShell Commandlets	267
2.567LP_Stealthy VSTO Persistence	268
2.568LP_Suspicious VMToolsd Child Process	268
2.569LP_Suspicious WMPRVSE Child Process	269
2.570LP_TerraMaster TOS CVE-2020-28188 Exploitation	269
2.571LP_VMware VSphere CVE-2021-21972 Exploitation	270
2.572LP_VMware View Planner CVE-2021-21978 Exploitation	270
2.573LP_Zoho ManageEngine ADSelfService Plus CVE-2021-40539 Exploitation	271
2.574LP_Possible Access to ADMIN Share	271
2.575LP_PsExec Tool Execution Detected	272
2.576LP_Screensaver Activities Detected	272
2.577LP_Suspect Svchost Activity Detected	272
2.578LP_Time-Stomping of Users Directory Files Detected	273
2.579LP_Windows Defender Exclusion Set Detected	273
2.580LP_Suspicious Netsh DLL Persistence Detected	274
2.581LP_Usage of Procdump Detected	274
2.582LP_Conhost Spawning Suspicious Processes	275
2.583LP_Proxy Execution via Explorer	275
2.584LP_Wlrmldr Lolbin Use as Launcher	275
2.585LP_Suspicious Process Execution via Pester Detected	276
2.586LP_Root Certificate Installation Detected	276
2.587LP_Suspicious process spawned by FTP	277
2.588LP_Chromeloader Cross-Process Injection to Load Extention	277
2.589LP_Proxy Execution via Explorer	278
2.590LP_Suspicious Root Certificate installation Detected	278
2.591LP_Windows Logon Reminder Usage as Launcher	279
2.592LP_Suspicious File Transfer Using Replace	279
2.593LP_Proxy Execution via Program Compatibility Wizard	280
2.594LP_Suspicious Driver Installation via PnPUtil	280
2.595LP_Application Whitelisting Bypass via PresentationHost	281
2.596LP_Suspicious File Extraction via Expand Detected	281
2.597LP_Suspicious Use of Extrac32 Detected	282
2.598LP_Shell spawn via HTML Help Detected	282
2.599LP_DLL Injection with Tracker Detected	282
2.600LP_Powershell Code Execution via SyncAppvPublishingServer	283
2.601LP_Malicious PE Execution by Microsoft Visual Studio Debugger	283
2.602LP_Suspicious Atbroker Registry Change Detected	284
2.603LP_DLL loaded Via Certoc Binary Detected	284
2.604LP_Suspicious Remote Binary Usage Detected	285

2.605LP_Suspicious ASP NET Compiler Execution Detected	285
2.606LP_Suspicious LoadAssembly PowerShell Diagnostic Script Execution	286
2.607LP_Suspicious Invocation PowerShell Diagnostic Script Execution	286
2.608LP_Registry Configured RunOnce Task Execution	287
2.609LP_RunOnce Registry Key Configuration Change	287
2.610LP_Suspicious WSL Bash Execution	288
2.611LP_WSL Execution Detected	288
2.612LP_Suspicious Usage of Csharp or Roslyn Csharp Interactive Console	288
2.613LP_Possible Commandline Obfuscation Detected	289
2.614LP_Possible Emotet Activity Detected	289
2.615LP_Suspicious Use of Control Panel Items	290
2.616LP_Suspicious Use of Colorcpl Detected	290
2.617LP_Suspicious File Download via Certreq	291
2.618LP_Process Dump via Rundll32 and Comsvcs	291
2.619LP_Registry Key Import Detected	292
2.620LP_Suspicious MachineGUID Query Detected	292
2.621LP_Process Injection Via Mavinject Detected	293
2.622LP_Possible File Transfer Using Finger Detected	293
2.623LP_Suspicious Use of Findstr Detected	294
2.624LP_Suspicious File Overwrite Using extrac32 Detected	294
2.625LP_Suspicious Sysmon Driver Unload Detected	295
2.626LP_Suspicious Execution via IE per User Utility	295
2.627LP_Proxy Execution via xWizard	296
2.628LP_Suspicious MSHTA Process Pattern	296
2.629LP_COM Object Execution via Shell Extension CLSID Verification Host	297
2.630LP_Suspicious Setup Information File Invoked via DefaultInstall	297
2.631LP_Creation of Alternate Data Stream	298
2.632LP_Alternate Data Stream Created using Findstr	298
2.633LP_Suspicious Download Using Diantz	299
2.634LP_Ngrok RDP Tunnel Detected	299
2.635LP_Windows Defender Uninstall via PowerShell	300
2.636LP_Hijacked Binary Execution via Settings Synchronizer	300
2.637LP_Suspicious Execution of Dump64	301
2.638LP_Code Compilation via Visual Basic Command Line Compiler	301
2.639LP_File Downloaded from Suspicious URL Using GfxDownloadWrapper	302
2.640LP_Suspicious CLR Logs File Creation	302
2.641LP_CLR DLL Loaded via Scripting Application	303
2.642LP_Obfuscation Script Usage via MSHTA to Execute Vbscript	303
2.643LP_Microsoft Defender Logging Disabled	304
2.644LP_UAC Bypass via CMLUA or CMSTPLUA	304
2.645LP_LSA Protected Process Light Disabled	305
2.646LP_Suspicious Invocation of Microsoft Workflow Compiler	305
2.647LP_Process Dump via Sqldumper Detected	306
2.648LP_Suspicious Usage of SQLToolsPS Detected	306
2.649LP_Proxy Execution of Malicious Payload via Pubprn	307

2.650LP_File Download via IMEWDBLD	307
2.651LP_Memory Dump via Adplus	307
2.652LP_Remote Thread Created via Ttdinject	308
2.653LP_Proxy Download via OneDriveStandaloneUpdater	308
2.654LP_Suspicious WMIC ActiveScriptEventConsumer Created	309
2.655LP_Remote Connection Established via Msbuild	309
2.656LP_Executables Started in Suspicious Folder	310
2.657LP_Windows RDP Port Modified	310
2.658LP_Curl Silent Mode Execution Detected	311
2.659LP_High Volume of File Modification or Deletion in Short Span	311
2.660LP_Non-Existent User Login Attempt Detected	312
2.661LP_Execution of Temporary Files Via Office Application	312
2.662LP_Execution of Temporary Files Via Office Application	312
2.663LP_Malicious Image Loaded Via Excel	313
2.664LP_Malicious Chrome Extension Detected	313
2.665LP_Chrome Extension Installed Outside of the Webstore	314
2.666LP_Chrome Extension Installed with DevTools Permission	314
2.667LP_Browser Credential Files Accessed	315
2.668LP_Windows Defender Antivirus Definitions Removal Detected	315
2.669LP_Exchange ProxyShell Pattern Detected	316
2.670LP_Successful Exchange ProxyShell Attack	316
2.671LP_DLL Loaded Via AllocConsole and RunDLL32	317
2.672LP_Active Directory Database Dump Attempt	317
2.673LP_Suspicious Child Process Creation via OneNote	318
2.674LP_Usage of Web Request Command	318
2.675LP_Reconnaissance Activity with Nltest	319
2.676LP_Regsvr32 Network Activity Detected	319
2.677LP_Privilege Escalation via Kerberos KrbRelayUp	320
2.678LP_Suspicious Execution of LNK File	320
2.679LP_Insecure Policy Set via Set-ExecutionPolicy	321
2.680LP_Network Connection to Suspicious Server	321

3 NON-MITRE ATT&CK Analytics	323
3.1 LP_Windows Login Attempt on Disabled Account	323
3.2 LP_VMware Link Up	323
3.3 LP_VMware Link Down	324
3.4 LP_LogPoint License Expiry Status	324
3.5 LP_Mitre Initial Access Using Spearphishing link Detected	324
3.6 LP_Mitre Command and Control Using Standard Application Layer Protocol Detected	325
3.7 LP_Endpoint Protect Threat Content Detected	325
3.8 LP_Endpoint Protect Device Disconnect	326
3.9 LP_Endpoint Protect File Delete	326
3.10 LP_Endpoint Protect File Copied To USB Device	326
3.11 LP_System Owner or User Discovery Process Detected	327

3.12	LP_System Services Discovery Detected	327
3.13	LP_SolarisLDAP Password Spraying Attack Detected	328
3.14	LP_Microsoft Defender AMSI Trigger	328
3.15	LP_Petitpotam - Anonymous RPC and File Share	329
3.16	LP_RDP Sensitive Settings Changed	329
3.17	LP_Secure Deletion with SDelete	329
3.18	LP_Suspicious Keyboard Layout Load Detected	330
3.19	LP_Remote Code Execution using WMI Win32_Process Class over WinRM	330
3.20	LP_Remote Code Execution using WMI Win32_Service Class over WinRM	331
3.21	LP_Suspicious Microsoft SQL Server PowerShell Module Use Detected .	331
3.22	LP_Shadow Copy Deletion Using OS Utilities Detected	332
3.23	LP_Child Process Spawned via Diskshadow Detected	332
3.24	LP_Code Execution Via Diskshadow Detected	333
3.25	LP_Process Pattern Match For CVE-2021-40444 Exploitation	333
3.26	LP_Suspicious Extexport Execution Detected	334
3.27	LP_Proxy Execution via Workfolders	334
3.28	LP_Proxy Execution via Windows Update Client	335
3.29	LP_Suspicious DLL Execution Using Windows Address Book	335
3.30	LP_Suspicious Use of Dotnet Detected	336
3.31	LP_Execution of Arbitrary Executable Using Storddiag	336
3.32	LP_Process Creation via Time Travel Tracer	337
3.33	LP_Time Travel Debugging Utility DLL Loaded	337
3.34	LP_File Execution via Msdeploy	337
3.35	LP_CVE-2022-40684 Exploitation Detected	338
3.36	LP_Possible Proxy Execution of Malicious Code	338
3.37	LP_Suspicious Usage of BitLocker Management Script	339
3.38	LP_Proxy Execution of Payloads via Microsoft Signed Script	339
3.39	LP_Execution of Windows Defender Offline Shell from Suspicious Folder	340
3.40	LP_DLL Loaded Via AccCheckConsole	340
3.41	LP_Proxy Execution via Appvlp	341
3.42	LP_Proxy DLL Execution via UtilityFunctions	341
3.43	LP_Suspicious Usage of Squirrel Binary	341
3.44	LP_Suspicious File Share Permission	342
3.45	LP_Legitimate Application Dropping Script File	342
4	Alert Rules Analytics	344
4.1	Alert Rules Dashboard	344
4.1.1	LP_Mitre Attack Analytics Overview	344
4.1.2	Adding the Alert Rules Dashboard	345
4.2	Search Template	347
4.2.1	Using the Salesforce Search Templates	347
5	KB-Lists	349

s.. Logpoint Documentation documentation master file, created by
sphinx-quickstart on Wed Aug 3 14:33:36 2011.

ALERT RULES

Alert Rules consists of alert packages, the [LP_Mitre Attack Analytics Overview](#) dashboard package and [Knowledge Base \(KB\) Lists](#) for analytics integrated into Logpoint. It provides a compliance and triage dashboard, enabling you to analyze trends and behaviors of entities and users within the organization and perform defensive gap assessment with MITRE ATT&CK. The alerts triggered by Logpoint are categorized based on the [MITRE ATT&CK](#) framework and are the starting point to build various detection techniques. When Logpoint identifies threats within your environment, it triggers security alerts based on predetermined rules, allowing you to detect the malicious activity, advanced malware and their Techniques, Tactics and Procedures (TTPs) early, so you can take corrective actions against them. You can customize dashboards and alerts to suit your needs and perform in-depth analysis with customized data and searches.

Logpoint's [ATT&CK navigator](#) shows the coverage of the ATT&CK framework in Logpoint. You can use the navigator to match Logpoint alerts with the relevant ATT&CK techniques and tactics. Read more about MITRE ATT&CK techniques and tactics in addition to their integration in Logpoint on the [Logpoint website](#).

Alert Rules Component

1. Alert Packages

- [MITRE ATT&CK Analytics](#)
- [NON-MITRE ATT&CK Analytics](#).

2. Dashboard Package

- LP_Mitre Attack Analytics Overview

3. Search Template

- LP_Mitre Attack Analytics Overview

Required Log Source

MITRE ATT&CK Analytics

- Windows Security Audit
- Windows Sysmon

Default Alert Rules

- All applicable log sources

MITRE ATT&CK ANALYTICS

The MITRE ATT&CK alerts available in Alert Rules are:

2.1 LP_CVE-2024-38112 Exploitation Detected

- **Trigger Condition:** Manipulation of events with *svchost.exe* process to spawn *iexplore.exe* process that dropped an *.hta* file.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
[label="Process" label=Create parent_process="*\svchost.exe" "process"="*\iexplore.exe"  
↪ " process_guid=*" as s1 followed by [norm_id=WindowsSysmon event_id=11 "process"=  
↪ "*\iexplore.exe" file="*.hta*"] as s2 within 1 minute on s1.process_guid=s2.process_  
↪ guid | rename s1.process as "process", s1.host as host, s1.parent_process as parent_  
↪ process, s1.user as user, s2.path as path, s2.file as file
```

2.2 LP_Certipy Tool Execution for AD CS Abuse

- **Trigger Condition:** Execution of Certipy, a hacktool commonly used for Active Directory Certificate (AD CS) abuse. Adversaries may use this tool to steal or forge certificates used for authentication to access remote systems or resources. False positives for this alert rule are unknown.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Steal or Forge Authentication Certificates

- **ATT&CK ID:** T1649
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create ("process"="*\Certipy.exe" OR file="Certipy.exe" OR
↪description="*Certipy*") OR (command IN ["* auth *", "* find *", "* forge *", "* relay *",
↪"* req *", "* shadow *"] command IN ["* -bloodhound*", "* -ca-pfx *", "* -dc-ip *", "* -
↪kirbi*", "* -old-bloodhound*", "* -pfx *", "* -target*", "* -username *", "* -vulnerable*",
↪"* auth -pfx*", "* shadow auto*", "* shadow list*"])
```

2.3 LP_Certify Tool Execution for AD CS Abuse

- **Trigger Condition:** Execution of Certify, a hacktool commonly used for Active Directory Certificate abuse. Adversaries may use this tool to steal or forge certificates used for authentication to access remote systems or resources.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Steal or Forge Authentication Certificates
- **ATT&CK ID:** T1649
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create ("process"="*\Certify.exe" OR file="Certify.exe" OR
↪description="*Certify*") OR (command IN ["*.exe cas *", "*.exe find *", "*.exe
↪pkiojects *", "*.exe request *", "*.exe download *"] command IN ["*/vulnerable*", "* /
↪template:*", "* /altname:*", "* /domain:*", "* /path:*", "* /ca:*"])
```

2.4 LP_Password Dumper Activity on LSASS

- **Trigger Condition:** Process handle on the LSASS process with a specific access mask and SAM_DOMAIN object type. Tools like Mimikatz create a process handle on the LSASS process with an elevated access mask for dumping purposes. This alert detects Mimikatz lsadump attempts.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSA Secrets
- **ATT&CK ID:** T1003.004

- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN [4656,4663] "process"="*\sass.exe" access="0x705"
↪ object_type="SAM_DOMAIN"
```

2.5 LP_Disabling of UAC Detected

- **Trigger Condition:** Disabling of User Access Control (UAC) in the endpoint. Adversaries may disable UAC to execute code directly with high integrity.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Account Control
- **ATT&CK ID:** T1548, T1548.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label=Registry label=Set label=Value target_object=
↪ "*EnableLUA*" detail="DWORD (0x00000000)"
```

2.6 LP_Behavior Related to Named Pipe Impersonation

- **Trigger Condition:** Suspicious events related to named pipe impersonation are detected, such as creating a named pipe, creating a service with a named pipe, and using a named pipe in the command line. Adversaries use named pipe impersonation for privilege escalation and to evade defense.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Access Token Manipulation
- **ATT&CK ID:** T1134
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
((label=Registry label=Set label=Value target_object=
↪ "*HKLM\System\CurrentControlSet\Services*\ImagePath*" detail="*\\.\pipe\*" ) OR
↪ (label=Service label=Install path="*\\.\pipe\*" ) OR (label="Process" label=Create
↪ user=System "process" IN ["*cmd.exe", "*powershell.exe"] command="*\\.\pipe\*"))
```

2.7 LP_Usage of Ngrok Utility Detected

- **Trigger Condition:** Execution of the Ngrok utility. Ngrok allows users to expose local servers behind NATs and firewalls to the public Internet over secure tunnels. Threat actors often use Ngrok to expose internal services to the Internet, like making RDP publicly accessible.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Protocol Tunneling
- **ATT&CK ID:** T1572
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (("process"="*\ngrok.exe" command IN ["* tcp *", "* http *", "* authtoken *"])OR (command="* start *" command="*--all*" command="*.ym/*"↵
↵command="*--config*") OR (command IN ["* tcp 139*", "* tcp 445*", "* tcp 3389*", "*↵
↵tcp 5985*", "* tcp 5986*"])))
```

2.8 LP_Chrome Addition of VPN Extension

- **Trigger Condition:** Addition of well-known VPN extensions in Chrome. Adversaries may initially leverage external-facing remote services such as VPNs and Citrix to access or persist within a network.
- **ATT&CK Category:** Initial Access, Persistence
- **ATT&CK Tag:** External Remote Services
- **ATT&CK ID:** T1133
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Registry" label="Set" target_object=
↵"*Software\Wow6432Node\Google\Chrome\Extensions*" target_object IN CHROME_
↵VPN_EXTENSIONS target_object="*update_url"
```

2.9 LP_Outlook Security Settings Change

- **Trigger Condition:** Modification to Outlook configuration through creating a security registry key. Changes to configuration can allow adversaries to run macros covertly without notifying users.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Registry" label="Value" label="Set" target_object="*\Outlook\Security\Level*"
↪ detail="DWORD (0x00000001)"
```

2.10 LP_Suspicious Certutil Command Detected

- **Trigger Condition:** Suspicious Certutil utility execution with parameters like decode or urlcache, which adversaries can use to download payloads from remote locations or encode/decode base64 obfuscated payloads.
- **ATT&CK Category:** Defense Evasion, Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer, Deobfuscate/Decode Files or Information
- **ATT&CK ID:** T1105, T1140
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\certutil.exe" OR file="CertUtil.exe")
↪ command IN ["*-decode *", "*/decode *", " *-decodehex *", "*/decodehex *", " *-
↪ urlcache *", "*/urlcache *", " *-verifctl *", "*/verifctl *", " *-encode *", "*/encode *",
↪ "*/exportPFX *", " *-exportPFX *"]
```

2.11 LP_Unsigned DLLs loaded by RunDLL32 or RegSvr32

- **Trigger Condition:** Injection of unsigned dynamic-link library (DLL), a common tactic attackers use to execute arbitrary code on Windows systems. Adversaries often leverage Windows builtin tools like RunDLL32 or RegSvr32 to execute the malicious code through unsigned or untrusted DLLs.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Regsvr32, Rundll32
- **ATT&CK ID:** T1218.010, T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Image label=Load "process" IN ["*\regsvr32.exe", "*\rundll32.exe"] (-is_signed=
↪ "true" OR status IN ["errorChaining", "errorCode_endpoint*", "errorExpired", "trusted
↪ "] )
```

2.12 LP_Terminal Service Configuration Modified

- **Trigger Condition:** Modifying settings related to terminal services. Adversaries can use this technique to bypass authentication requirements or bypass security settings.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label="Registry" label=Set target_object IN ["*Software\Microsoft\Terminal Server Client*
↪ ", "*Software\Policies\Microsoft\Windows NT\Terminal Services\"]) target_object IN [
↪ "*AuthenticationLevelOverride*", "*DisableRemoteDesktopAntiAlias*",
↪ "*DisableSeucirtySettings*"]) OR (label="Process" label=Create "process"="*\reg.exe"
↪ command="*add*" command IN ["*Software\Microsoft\Terminal Server Client*",
↪ "*Software\Policies\Microsoft\Windows NT\Terminal Services\"]) command IN [
↪ "*AuthenticationLevelOverride*", "*DisableRemoteDesktopAntiAlias*",
↪ "*DisableSeucirtySettings*"])
```

2.13 LP_System Service Reconnaissance through WMI

- **Trigger Condition:** Usage of WMI for service reconnaissance is detected. Adversaries might use WMI to check if a specific service is running on a host to gather reconnaissance information, identify potential vulnerabilities, plan further actions and maintain persistence within the target network.
- **ATT&CK Category:** Execution, Discovery
- **ATT&CK Tag:** System Service Discovery, Windows Management Instrumentation
- **ATT&CK ID:** T1007, T1047
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create("process"="*\wmic.exe" OR file="wmic.exe") command=
↪ "*service*" -command IN ["*assoc*", "*call*", "*create*", "*delete*"]
```

2.14 LP_Process Reconnaissance through WMI

- **Trigger Condition:** Usage of WMI for listing processes running on the compromised host. Adversaries might use WMI to list all the running processes on the host to bypass security measures.
- **ATT&CK Category:** Execution, Discovery
- **ATT&CK Tag:** Windows Management Instrumentation, System Service Discovery
- **ATT&CK ID:** T1047, T1007
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create("process"="*\wmic.exe" OR file="wmic.exe") command=
↪ "*process*" -command IN ["*assoc*", "*call*", "*create*", "*delete*"]
```

2.15 LP_Process Created through WMI

- **Trigger Condition:** Usage of WMI to spawn new processes either on local or remote hosts. Adversaries use WMI to spawn new processes because it provides them with a stealthy, persistent and flexible means of executing malicious code, bypassing security controls and maintaining control over compromised systems.

- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Windows Management Instrumentation
- **ATT&CK ID:** T1047
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\wmic.exe" OR file="wmic.exe") command=
↳ "*process*" command="*call*" command="*create*"
```

2.16 LP_Local Users Reconnaissance through WMI

- **Trigger Condition:** Usage of Windows Management Instrumentation (WMI) to list all local user accounts. Adversaries might use WMI to list all local user accounts rather than a straightforward command like net user for defense evasion.
- **ATT&CK Category:** Execution, Discovery
- **ATT&CK Tag:** Windows Management Instrumentation, Local Account
- **ATT&CK ID:** T1047, T1087.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\wmic.exe" OR file="wmic.exe") command=
↳ "*useraccount*"
```

2.17 LP_Installed Software Updates Reconnaissance through WMI

- **Trigger Condition:** Usage of Windows Management Instrumentation (WMI) to list installed software hotfixes and patches. Adversaries might use WMI to gather information about target systems, identify vulnerabilities and plan attack strategies.
- **ATT&CK Category:** Execution, Discovery
- **ATT&CK Tag:** Windows Management Instrumentation, Software Discovery
- **ATT&CK ID:** T1047, T1518

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\wmic.exe" OR file="wmic.exe") command=
↳ "*qfe*"
```

2.18 LP_Application uninstall via WMIC

- **Trigger Condition:** Uninstallation of applications on a system using the Windows Management Instrumentation Command-line (WMIC) tool is detected. This uninstallation method is commonly observed in Advanced Persistent Threat (APT) activities, where adversaries aim to remove security products installed on target systems to evade detection and maintain persistence.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Windows Management Instrumentation, Disable or Modify Tools
- **ATT&CK ID:** T1047, T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\wmic.exe" OR file="wmic.exe") command=
↳ "*product*" command="*call*" command="*uninstall*"
```

2.19 LP_Applnit DLLs Detected

- **Trigger Condition:** Adversaries establish persistence and/or elevate privileges by executing malicious content triggered by Applnit DLLs loaded into processes.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Applnit DLLs
- **ATT&CK ID:** T1546, T1546.010
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) (target_object=
↳ "*"\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Windows\\Appinit_Dlls\\*" or
↳ target_object="*"\\SOFTWARE\\Wow6432Node\\Microsoft\\Windows
↳ NT\\CurrentVersion\\Windows\\Appinit_Dlls\\*") -user IN EXCLUDED_USERS
```

2.20 LP_High Severity EPP Alert

- **Trigger Condition:** High or critical severity alert generated by any endpoint protection platform like CrowdStrike and Microsoft Defender for Endpoint.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** CrowdStrikeEPO, Microsoft Defender ATP, Trend Vision
- **Query:**

```
norm_id=* device_category=EPP risk_level IN [ "High", "Critical"]
```

2.21 LP_Host Generating Multiple Medium Severity EPP Alert

- **Trigger Condition:** Multiple medium severity alerts generated by endpoint protection platforms like CrowdStrike and Microsoft Defender for Endpoint.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** CrowdStrikeEPO, Microsoft Defender ATP, Trend Vision
- **Query:**

```
norm_id=* device_category=EPP risk_level="Medium" | chart distinct_count(detection_
↳ id) as DC by host_id | search DC > 1
```

2.22 LP_Host Generating Multiple High Severity EPP Alert

- **Trigger Condition:** Multiple high or critical severity alerts generated by endpoint protection platforms like CrowdStrike and Microsoft Defender for Endpoint.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** CrowdStrikeEPO, Microsoft Defender ATP, Trend Vision
- **Query:**

```
norm_id=* device_category=EPP risk_level IN ["high","critical"] | chart distinct_
↪ count(detection_id) as DC by host_id | search DC > 1
```

2.23 LP_Medium Severity EPP Alert

- **Trigger Condition:** Medium severity alert generated by any endpoint protection platform like CrowdStrike and Microsoft Defender for Endpoint.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** CrowdStrikeEPO, Microsoft Defender ATP, Trend Vision
- **Query:**

```
norm_id=* device_category="EPP" risk_level="Medium"
```

2.24 LP_Windows Service Stop or Delete

- **Trigger Condition:** Windows service or process being stopped, deleted or disabled via system binaries is detected. `sc.exe`, `net.exe` and `net1.exe` are Microsoft Windows system internal binaries that adversaries can use to stop or delete services and processes to render those services unavailable to legitimate users or to avoid hindrances in their attack chain.

- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Service Stop
- **ATT&CK ID:** T1489
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create ("process" IN ["*\\sc.exe", "*\\net.exe", "*\\net1.exe"]  
↪ command= "*stop*") OR ("process"= "*\\sc.exe" command IN ["*delete*", "*disabled*"  
↪ "]) -user IN EXCLUDED_USERS
```

2.25 LP_Suspicious Hack Tools Execution

- **Trigger Condition:** Execution of different Windows-based hack tools via their import hash (imphash) is detected, even if the files have been renamed. The MALICIOUS_TOOLS_IMPHASH list must be imported before activating this alert.
- **ATT&CK Category:** Credential Access, Resource Development
- **ATT&CK Tag:** OS Credential Dumping, Tool
- **ATT&CK ID:** T1003, T1588.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 hash_import IN MALICIOUS_TOOLS_IMPHASH
```

2.26 LP_Suspicious Execution of XORDump Utility for LSASS Memory Dump

- **Trigger Condition:** Suspicious execution of XORDump Utility, commonly used for LSASS Memory Dump, is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

- **Query:**

```
label="process" label=create "process"="*\xordump.exe" OR command IN ["* -process ↪lsass.exe *", "* -m comsvcs *", "* -m dbghelp *", "* -m dbgcore *"]
```

2.27 LP_Suspicious Execution of Createdump Utility for Memory Dump

- **Trigger Condition:** Usage of the `createdump.exe` LOLOBIN utility to dump process memory is detected. Adversaries often seek to dump the `lsass.exe` process memory because it contains sensitive information, such as user credentials and authentication tokens.
- **ATT&CK Category:** Credential Access, Defense Evasion
- **ATT&CK Tag:** LSASS Memory, Masquerading
- **ATT&CK ID:** T1003.001, T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\createdump.exe" OR file="FX_VER_ ↪INTERNALNAME_STR'" command IN ["* -u *", "* -full *", "* -f *", "* --name *", "*.dmp* ↪"]
```

2.28 LP_Suspicious DsInternals Get-ADReplAccount Activities

- **Trigger Condition:** Suspicious activities related to `Get-ADReplAccount` from the `DsInternals PowerShell Module` are detected. Adversaries may use this tool to maliciously access Domain Controllers' credentials. For event id 4104, Powershell Script Block logging is required.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** DCSync
- **ATT&CK ID:** T1003.006
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label="process" label=create command="*Get-ADReplAccount*" command="*-All*"
↪ command="*Server*") OR (norm_id=WinServer event_id=4104 script_block="*Get-
↪ ADReplAccount*" script_block="*-All*" script_block="*Server*")
```

2.29 LP_Suspicious Activities Associated with NTDS Exfiltration

- **Trigger Condition:** Suspicious activities related to the Active Directory Domain Database (ntds.dit) are detected. Adversaries may attempt to access or create a copy of the Active Directory domain database to steal credential information and obtain information about domain members, such as devices, users and access rights.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** NTDS
- **ATT&CK ID:** T1003.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create ("process" IN ["*\\NTDSDump.exe", "*\\NTDSDumpEx.exe"
↪ ]) OR (command="*ntds.dit*" command="*system.hive*") OR (command=
↪ "*NTDSgrab.ps1*") OR (command="*ac i ntds*" command="*create full*") OR
↪ (command="*/c copy*" command="*\\windows\\ntds\\ntds.dit*") OR (command=
↪ "*activate instance ntds*" command="*create full*") OR (command="*powershell*"
↪ command="*ntds.dit*") OR (command="*ntds.dit*" (parent_process IN ["*\\apache*",
↪ "*\\tomcat*", "*\\AppData*", "*\\Temp\\*", "*\\Public\\*", "*\\PerfLogs\\*"] OR "process" IN [
↪ "*\\apache*", "*\\tomcat*", "*\\AppData*", "*\\Temp\\*", "*\\Public\\*", "*\\PerfLogs\\*"])))
```

2.30 LP_Possible LSASS Memory Dump Via Windows Task Manager

- **Trigger Condition:** Creation of a *lsass.dmp* file by the taskmgr process is detected. Adversaries often seek to dump the *lsass.exe* process memory because it contains sensitive information, such as user credentials and authentication tokens.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory

- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 "process"="*\taskmgr.exe" path=
↪ "*\Appdata\local\*" file="lsass*.dmp"
```

2.31 LP_Possible LSASS Dump Via SilentProcessExit Technique

- **Trigger Condition:** Dumping of a possible LSASS via the SilentProcessExit Technique is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id IN [12,13,14] target_object="*Microsoft\Windows
↪ NT\CurrentVersion\SilentProcessExit\lsass.exe"
```

2.32 LP_NTDS or SAM Database Copy Operation

- **Trigger Condition:** Copy operation of Active Directory Domain Database (ntds.dit) or Security Account Manager (SAM) files is detected. Adversaries may attempt to access or create a copy of the Active Directory domain database or SAM database to steal credential information and obtain other information about domain members, such as devices, users and access rights.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, Security Account Manager, NTDS
- **ATT&CK ID:** T1003, T1003.002, T1003.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create (command IN ["*copy*", "*xcopy*", "*Copy-Item*",
↪ "*move*", "*cp*", "*mv*"] OR "process"="*\esentutl.exe" command IN ["*/y*", "*/vss*",
↪ "*/d*"]) command IN ["*\NTDS.dit",
↪ ".*\GLOBALROOT\Device\HarddiskVolumeShadowCopy*", ".*\SYSTEM*",
↪ ".*\SECURITY*", ".*C:\tmp\log*", ".*\config\SAM", ".*\system32\config\SAM*"]
```

2.33 LP_Microsoft IIS Service Account Password Dumped

- **Trigger Condition:** Execution of Information Services (IIS) command-line tool AppCmd to list passwords is detected. An attacker with IIS web server access via a web shell can decrypt and dump the IIS AppPool service account password using AppCmd.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\appcmd.exe" or file=appcmd.exe)↗
↪ command="*list*" (command IN ["*/config*", "*/xml*", ".*-config*", ".*-xml*"]) OR↗
↪ (command IN ["*/@t'", "*/text*", "*/show*", ".*-@t'", ".*-text*", ".*-show*",
↪ ".*password*", ".*.*"])↗
```

2.34 LP_Dumpert Process Dumper Execution

- **Trigger Condition:** Dumping of a possible credential via a tool called NPPSpy is detected. NPPSpy is a Network Provider/Credential Manager DLL that extracts credentials and stores them in plain text. This alert monitors file creation, registry manipulation and process creation events that indicate a potential credential dump via NPPSpy.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 hash_import=
↪ "09D278F9DE118EF09163C6140255C690" or command="*Dumpert.dll"
```

2.35 LP_Credential Dump Via NPPSpy

- **Trigger Condition:** Dumping of a possible credential via a tool called NPPSpy is detected. NPPSpy is a Network Provider/Credential Manager DLL that extracts credentials and stores them in plain text. This alert monitors file creation, registry manipulation and process creation events that indicate a potential credential dump via NPPSpy.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label=Registry label=Set target_object IN ["*\System\CurrentControlSet\Services\*",
↪ "*CurrentControlSet\Control\*"] target_object="*\NetworkProvider*" -(target_object
↪ IN ["*\System\CurrentControlSet\Services\WebClient\NetworkProvider*",
↪ "*\System\CurrentControlSet\Services\LanmanWorkstation\NetworkProvider*",
↪ "*\System\CurrentControlSet\Services\RDPNP\NetworkProvider*"] OR "process"=
↪ "C:\Windows\System32\poqexec.exe")) OR (label=file label=create file IN ["NPPSpy.txt",
↪ "NPPSpy.dll"]) OR (label="process" label=create command=
↪ "*\System\CurrentControlSet\Services\*" command="*\NetworkProvider*")
```

2.36 LP_Malicious PowerShell Commandlets Detected

- **Trigger Condition:** Execution of malicious PowerShell commandlets.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** PowerShell, Windows
- **Query:**

```
event_source="Microsoft-Windows-PowerShell" ((event_id="4103" command IN [
  ↳ MALICIOUS_POWERSHELL_COMMANDLET_NAMES -command="*Get-
  ↳ SystemDriveInfo*") OR (event_id="4104" script_block IN MALICIOUS_POWERSHELL_
  ↳ COMMANDLET_NAMES -script_block="*Get-SystemDriveInfo*" ))
```

2.37 LP_Suspicious Base64 Encoded PowerShell Command

- **Trigger Condition:** Execution of suspicious base64 encoded commands via PowerShell.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** PowerShell, Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create ("process" IN ["*\powershell.exe", "\*pwsh.exe"] OR file IN [
  ↳ "PowerShell.EXE", "pwsh.dll"]) command IN ["* hidden *",
  ↳ "*AGkAdABzAGEAZABtAGkAbgAgAC8AdABYAGEAbgBzAGYAZQByA*",
  ↳ "*aXRzYWRtaW4gL3RyYW5zZmVy*",
  ↳ "*IAaQB0AHMAYQBkAG0AaQBuACAALwB0AHIAyQBuAHMAZgBIAHIA*",
  ↳ "*JpdHNhZG1pbiAvdHJhbnNmZX*",
  ↳ "*YgBpAHQAacwBhAGQAbQBpAG4AIAAvAHQAacgBhAG4AcwBmAGUAacg*",
  ↳ "*Yml0c2FkbWlucC90cmFuc2Zlc*", "*AGMAaAB1AG4AawBfAHMAaQB6AGUA*",
  ↳ "*JABjAGgAdQBAGsAXwBzAGkAegBIA*", "*JGNodW5rX3Npem*",
  ↳ "*QAYwBoAHUAbgBrAF8AcwBpAHoAZQ*", "*RjaHVua19zaXpl*", "*Y2h1bmtfc2l6Z*",
  ↳ "*AE8ALgBDAG8AbQBwAHIAZQBzAHMAaQBvAG4A*",
  ↳ "*kATwAuAEMAbwBtAHAAcgbIAHMAcwbBpAG8Abg*", "*IPLkNvbXByZXNzaW9u*",
  ↳ "*SQBPAC4AQwBvAG0AcABYAGUAacwBzAGkAbwBuA*", "*SU8uQ29tcHJlc3Npb2*",
  ↳ "*Ty5Db21wcmVzc2lvc*", "*AE8ALgBNAGUAbQBvAHIAeQBTAHQAacgBIAGEAbQ*",
  ↳ "*kATwAuAE0AZQBtAG8AcgB5AFMAAdABYAGUAYQBtA*", "*IPLk1lbW9yeVN0cmVhb*",
  ↳ "*SQBPAC4ATQBIAG0AbwByAHkAUwB0AHIAZQBhAG0A*",
  ↳ "*SU8uTWVtb3J5U3RyZWFT*", "*Ty5NZW1vcnltTdhJIYW*",
  ↳ "*4ARwBIAHQAQwBoAHUAbgBrA*", "*5HZXRDaHVua*",
  ↳ "*AEcAZQB0AEMAaAB1AG4Aaw*", "*LgBHAGUAdABDAGgAdQBAGsA*",
  ↳ "*LkdldENodW5r*", "*R2V0Q2h1bm*",
  ↳ "*AEgAUgBFAEEARABfAEkATgBGAE8ANgA0A*",
  ↳ "*QASABSAEUAAQQBEAF8ASQBOAEYATwA2ADQA*", "*RIUkVBRf9JTkZPNj*",
  ↳ "*SFJFQRfSU5GTzY0*", "*VABIAFIARQBBAEQAXwBJAE4ARgBPADYANA*",
  ↳ "*VEhSRUFEX0lORk82N*",
  ↳ "*AHIAZQBhAHQAQZQBSAGUAbQBvAHQAQZQBUAGgAcgBIAGEAZA*",
  ↳ "*cmVhdGVSZW1vdGVUaHJIYW*",
  ↳ "*MAcgbIAGEAdABIAFIABtAG8AdABIAFQAaABYAGUAYQBkA*",
  ↳ "*NyZXRyZW5zZmVyZW50cmVhZC", "*Q3J1XRIUMVtb3RlVGYhZWFK*",
  ↳ "*QwByAGUAYQB0AGUAUgBIAg0AbwB0AGUAUVAB0AHIAZQBhAGQA*",
  ↳ "*0AZQBtAG0AbwB2AGUA*", "*1lbW1vdm*", "*AGUAbQBtAG8AdgBIA*",
  ↳ "*bQBIAG0AbQBvAHYAZQ*", "*bWVhZG90Z27*", "*ZW1hZ3Zl"]
```

(continues on next page)

(continued from previous page)

2.38 LP_Code Execution Via Diskshadow Detected

- **Trigger Condition:** Usage of diskshadow binary to execute code from a file is detected. Adversaries can use diskshadow with -s or /s tag to execute a command from a file and bypass detection.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\diskshadow.exe" command IN ["*/s *", "*-s *  
→"]
```

2.39 LP_Image Mount Indicator in Recent Files

- **Trigger Condition:** Recent element files pointing to .iso, .img, .vhd or .vhdx files are detected. These image files are used in phishing attacks to deliver malware and circumvent the Mark of the Web (MotW) in Windows to execute malicious commands. It is a false positive on server systems, but on workstations, users rarely mount .iso or .img files.
- **ATT&CK Category:** Initial Access, Defense Evasion
- **ATT&CK Tag:** Mark-of-the-Web Bypass, Spearphishing Attachment
- **ATT&CK ID:** T1553.005, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id="WindowsSysmon" event_id=11 path="*\Microsoft\Windows\Recent\*" file IN [  
→ "*.iso.lnk", "*.img.lnk", "*.vhd.lnk", "*.vhdx.lnk"]
```

2.40 LP_Disk Image File Created

- **Trigger Condition:** Image files with extensions like .iso, .vhd, and .vhdx are downloaded from the internet into a user's download or temporary folder. Adversaries often deliver their malware payloads through a .iso file format to bypass the Mark of the Web (MotW) in Windows and execute their payload successfully.
- **ATT&CK Category:** Initial Access, Defense Evasion
- **ATT&CK Tag:** Mark-of-the-Web Bypass, Spearphishing Attachment
- **ATT&CK ID:** T1553.005, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id="WindowsSysmon" event_id=11 (path="*Users*" path="*Downloads*") OR
↪(path="*Appdata*") file IN ["*.iso", "*.vhd", "*.vhdx", "*.img"]
```

2.41 LP_PowerShell Execution via DLL Detected

- **Trigger Condition:** Execution of PowerShell via DLL instead of powershell.exe is detected. Powershell is a command-line shell used in Windows. Adversaries can execute PowerShell for malicious activities even if powershell.exe is blocked and no strict application whitelisting is implemented.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** PowerShell, Rundll32
- **ATT&CK ID:** T1059.001, T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process" IN ["*\\rundll32.exe", "*\\regsvcs.exe",
↪"*\\InstallUtil.exe", "*\\regasm.exe"] OR file in ["RUNDLL32.EXE", "RegSvcs.exe", "InstallUtil.
↪exe", "RegAsm.exe"]) command IN ["*Default.GetString*", "*FromBase64String*",
↪"*Invoke-Expression*", "*IEX *", "*Invoke-Command*", "*ICM *", "*DownloadString*"]
```

2.42 LP_Suspicious Windows Defender Registry keys Modification

- **Trigger Condition:** Changes in the Windows Defender registry settings to disable Windows Defender functionalities. Adversaries try to alter Windows Defender-associated registries to disable protection and detection features.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Disable or Modify Tools
- **ATT&CK ID:** T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=registry label=set target_object IN ["*\SOFTWARE\Microsoft\Windows Defender*",
↪  "\SOFTWARE\Policies\Microsoft\Windows Defender"] ( detail="DWORD(
↪  0x00000001)" target_object IN ["*\DisableAntiSpyware", "\DisableAntiVirus",
↪  "\DisableBehaviorMonitoring", "\DisableIntrusionPreventionSystem",
↪  "\DisableIOAVProtection", "\DisableOnAccessProtection",
↪  "\DisableRealtimeMonitoring", "\DisableScanOnRealtimeEnable",
↪  "\DisableScriptScanning", "\DisableEnhancedNotifications",
↪  "\DisableBlockAtFirstSeen"] ) OR ( detail="DWORD (0x00000000)" target_object IN [
↪  "\App and Browser protection\DisallowExploitProtectionOverride",
↪  "\Features\TamperProtection", "\MpEngine\MpEnablePus", "\PUAProtection",
↪  "\Signature Update\ForceUpdateFromMU", "\SpyNet\SpynetReporting",
↪  "\SpyNet\SubmitSamplesConsent", "\Windows Defender Exploit Guard\Controlled
↪  Folder Access\EnableControlledFolderAccess"] )
```

2.43 LP_Executable Files Created and Executed by Office Applications

- **Trigger Condition:** Executable file dropped or modified via office applications and executed within a specific time range.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Attachment
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon

- **Query:**

```
[norm_id=WindowsSysmon event_id=11 "process" IN ["*\WINWORD.EXE", "*\EXCEL.EXE",
↪ "\POWERPNT.EXE", "*\MSACCESS.EXE"] file IN [".exe", ".com", ".bat", ".cmd"]]]?
↪ as s1 followed by [norm_id=WindowsSysmon event_id=1] as s2 within 2 minute on s1.
↪ path=s2.path and s1.file=s2.file | rename s1.host as host, s1.user as user, s1.domain as?
↪ domain, s1.process as "process", s1.file as file, s1.path as path
```

2.44 LP_WMI Backdoor in Exchange Transport Agent

- **Trigger Condition:** A WMI backdoor in Exchange Transport Agents (ETA) via WMI event filters is detected.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Event Triggered Execution, Windows Management Instrumentation Event Subscription
- **ATT&CK ID:** T1546, T1546.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (parent_process="*\EdgeTransport.exe" -("process" =
↪ "C:\Windows\System32\conhost.exe" OR ("process"="C:\Program?
↪ Files\Microsoft\Exchange Server\*" "process"="*\Bin\OleConverter.exe")) -user IN?
↪ EXCLUDED_USERS
```

2.45 LP_Suspicious Msiexec Usage Detected

- **Trigger Condition:** A .msi file executed from the publicly writable folder, and a command prompt or powershell spawned by msiexec. Adversaries can use this technique to execute their payload by evading defence.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Msiexec
- **ATT&CK ID:** T1218.007
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create(("process"="*\msiexec.exe" (command IN ["*C:\Users*",
↪ "*\ProgramData*", "*\AppData\Local*", "*\AppData\Roaming*", "*\Users\Public*"]
↪ command="*msi*") OR (command="*://*") OR (command IN ["*/i*", "*-i*"]
↪ ((command IN ["*/q*", "*quiet*", "*qn*", "*-q*", "*-quiet*", "*-qn*"]) OR (command
↪ IN ["*-Q-l*", "*-l-Q*", "*q-i*", "*-q/i*", "*q/i*"]))) -(parent_image="*setup*") -integrity_
↪ level=SYSTEM) OR ("process"="*/msiexec.exe" command="*http*") OR (-"process" IN [
↪ "C:\Windows\System32\*", "C:\Windows\SysWOW64\*", "C:\Windows\WinSxS\*"]
↪ OR ("parent_process"="*\msiexec.exe" "process" IN ["*\cmd.exe", "*\powershell.exe",
↪ "*\icacls.exe", "*\expand.exe", "*\rundll32.exe", "*\pwsh.exe"])))
```

2.46 LP_Suspicious Usage of Advanced IP Scanner

- **Trigger Condition:** Suspicious usage of Advanced IP Scanner is detected.
- **ATT&CK Category:** Reconnaissance, Discovery
- **ATT&CK Tag:** Network Service Discovery, Network Share Discovery, Gather Victim Network Information
- **ATT&CK ID:** T1046, T1135, T1590
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create(("process"="*\advanced_ip_scanner*" OR file=
↪ "*advanced_ip_scanner*") OR (description="*Advanced IP Scanner*") OR (command=
↪ "*portable*" command="*/lng*"))
```

2.47 LP_Persistence through Port Monitor Registry modification

- **Trigger Condition:** A new entry in the printer monitor registry is detected.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Port Monitors
- **ATT&CK ID:** T1547, T1547.010
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object=
↪ "HKLM\SYSTEM\CurrentControlSet\Control\Print\Monitors\*" detail="*.dll" -(("process
↪ "= "C:\Windows\System32\spoolsv.exe" target_object=
↪ "*\System\CurrentControlSet\Control\Print\Monitors\CutePDF Writer Monitor v4.
↪ 0\Driver*" detail="cpwmon64_v40.dll" user IN ["*AUTHOR*", "*AUTOR*"]) OR (target_
↪ object= "*Control\Print\Monitors\MONVNC\Driver*") OR (target_object=
↪ "*Control\Print\Environments\*" target_object= "*\Drivers\*" target_object= "*\VNC\
↪ Printer*"))
```

2.48 LP_File Dropped in Suspicious Location

- **Trigger Condition:** Dropping a file in a suspicious system location is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer
- **ATT&CK ID:** T1105
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 path IN ["C:\ProgramData*", "*\AppData\Local*",
↪ "*\AppData\Roaming*", "C:\Users\Public*"] -"process" IN ["*\Microsoft Visual
↪ Studio\Installer\*\BackgroundDownload.exe", "C:\Windows\system32\cleanmgr.exe",
↪ "*\Microsoft\Windows Defender\*\MsMpEng.exe",
↪ "C:\Windows\SysWOW64\OneDriveSetup.exe", "*\AppData\Local\Microsoft\OneDrive*
↪ ", "*\Microsoft\Windows Defender\platform\*\MpCmdRun.exe",
↪ "*\AppData\Local\Temp\mpam-*.exe"] -file IN ["vs_setup_bootstrapper.exe",
↪ "DismHost.exe", "*_PSScriptPolicyTest*.ps1"]
```

2.49 LP_Alternate PowerShell Hosts via Powershell Module

- **Trigger Condition:** Alternate PowerShell host trying to bypass detections based on *powershell.exe*. Adversaries can use this technique to potentially bypass detections looking for *powershell.exe*. They can use it to discover information or execute malicious code.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell

- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id="WinServer" event_source="Microsoft-Windows-PowerShell" event_id=4103 -
↪(host_application IN ["*powershell*", "*C:\Windows\System32\WindowsPowerShell\v1.
↪0\powershell*", "*C:\Windows\SysWOW64\WindowsPowerShell\v1.0\powershell*",
↪"*C:/Windows/System32/WindowsPowerShell/v1.0/powershell*", "*C:/Windows/
↪SysWOW64/WindowsPowerShell/v1.0/powershell*",
↪"*C:\WINDOWS\System32\sdiagnhost.exe -Embedding*", "*ConfigSyncRun.exe*",
↪"*C:\Windows\system32\dsac.exe*", "*C:\Windows\system32\wsmprovhost.exe -
↪Embedding*"] OR payload IN ["*Update-Help*", "*Failed to update Help for the
↪module*"])
```

2.50 LP_Suspicious Usage of Where Binary

- **Trigger Condition:** An enumeration attempt on browser bookmarks to learn more about compromised hosts is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Browser Bookmark Discovery
- **ATT&CK ID:** T1217
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create "process"="*\where.exe" command in ["*places.sqlite*",
↪"*cookies.sqlite*", "*formhistory.sqlite*", "*logins.json*", "*key4.db*", "*key3.db*",
↪"*sessionstore.jsonlz4*", "*History*", "*Bookmarks*", "*Cookies*", "*Login Data" ]
```

2.51 LP_MSHTA - Activity Detected

- **Trigger Condition:** Network connection events initiated by *mshta.exe* are detected. Adversaries abuse *mshta.exe* for proxy execution of malicious .hta files, and Javascript or VBScript through a trusted Windows utility.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Signed Binary Proxy Execution, Mshta

- **ATT&CK ID:** T1218, T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 (command="*mshta.exe" or parent_command=
↳ "*mshta.exe") -user IN EXCLUDED_USERS
```

2.52 LP_Alternate PowerShell Hosts via Named Pipe

- **Trigger Condition:** Alternate Command and Scripting Interpreter and PowerShell hosts are detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=17 pipe="\PSHost*" source_image=* -source_image
↳ IN ["*\powershell.exe", ".*\powershell_ise.exe", ".*\WINDOWS\System32\sdiagnhost.exe",
↳ ".*\WINDOWS\System32\wsmprovhost.exe", ".*\Windows\system32\dsac.exe",
↳ ".*\Windows\system32\wbem\wmiprvse.exe", ".*\ForefrontActiveDirectoryConnector.exe",
↳ ".*\c:\windows\system32\inetsrv\w3wp.exe", "C:\Program Files\Citrix\*", "C:\Program
↳ Files\Microsoft\Exchange Server\*", "C:\Windows\system32\ServerManager.exe",
↳ "C:\Program Files\PowerShell\7\pwsh.exe", ".*\Program Files\Microsoft SQL
↳ Server\*\Tools\Binn\SQLPS.exe"]
```

2.53 LP_Suspicious File Execution Using Wcript or Cscript

- **Trigger Condition:** Process create events for the *fltmc.exe* utility and the specific command line used to unload minifilter drivers is detected. An adversary may attempt to block indicators or events captured by sensors from being gathered and analyzed.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Indicator Blocking
- **ATT&CK ID:** T1562, T1562.006

- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create ("process"="*\fltmc.exe" OR command="*\fltmc*unload*") -
  ↳ user IN EXCLUDED_USERS
```

2.54 LP_Suspicious Child Process Spawned by Microsoft Office Product

- **Trigger Condition:** Suspicious child process spawned by Microsoft Office Products such as Excel, Powerpoint, Onenote or Visio are detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell, Windows Command Shell, Malicious File
- **ATT&CK ID:** T1059, T1059.001, T1059.003, T1204.002
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create parent_process IN ["*\WINWORD.EXE", ".*\EXCEL.EXE",
  ↳ ".*\POWERPNT.exe", ".*\MSPUB.exe", ".*\VISIO.exe", ".*\OUTLOOK.EXE",
  ↳ ".*\MSACCESS.EXE", ".*\EQNEDT32.EXE", ".*\Onenote.exe", ".*\wordview.exe"] ("process
  ↳ IN [".*\AppVLP.exe", ".*\bash.exe", ".*\bitsadmin.exe", ".*\certoc.exe", ".*\certutil.exe",
  ↳ ".*\cmd.exe", ".*\cmstp.exe", ".*\control.exe", ".*\cscript.exe", ".*\curl.exe", ".*\forfiles.exe",
  ↳ ".*\hh.exe", ".*\ieexec.exe", ".*\installutil.exe", ".*\javaw.exe", ".*\mftrace.exe", ".*\Microsoft.
  ↳ Workflow.Compiler.exe", ".*\msbuild.exe", ".*\msdt.exe", ".*\mshta.exe", ".*\msidb.exe",
  ↳ ".*\msiexec.exe", ".*\msxsl.exe", ".*\odbcconf.exe", ".*\pcalua.exe", ".*\powershell.exe",
  ↳ ".*\pwsh.exe", ".*\regasm.exe", ".*\regsvcs.exe", ".*\regsvr32.exe", ".*\rundll32.exe",
  ↳ ".*\schtasks.exe", ".*\scrcons.exe", ".*\scriptrunner.exe", ".*\sh.exe", ".*\svchost.exe",
  ↳ ".*\verclsid.exe", ".*\wmic.exe", ".*\workfolders.exe", ".*\wscript.exe", ".*\AppData\*",
  ↳ ".*\Users\Public\*", ".*\ProgramData\*", ".*\Windows\Tasks\*", ".*\Windows\Temp\*",
  ↳ ".*\Windows\System32\Tasks\*"] OR file in ["bitsadmin.exe", "CertOC.exe", "CertUtil.exe",
  ↳ "Cmd.Exe", "CMSTP.EXE", "cscript.exe", "curl.exe", "HH.exe", "IEExec.exe", "InstallUtil.
  ↳ exe", "javaw.exe", "Microsoft.Workflow.Compiler.exe", "msdt.exe", "MSHTA.EXE",
  ↳ "msiexec.exe", "Msxsl.exe", "odbcconf.exe", "pcalua.exe", "PowerShell.EXE", "RegAsm.
  ↳ exe", "RegSvcs.exe", "REGSVR32.exe", "RUNDLL32.exe", "schtasks.exe", "ScriptRunner.
  ↳ exe", "wmic.exe", "WorkFolders.exe", "wscript.exe"])
```

2.55 LP_RClone Utility Execution

- **Trigger Condition:** Execution of the RClone tool or command line option used in the tool. Adversaries can utilize this utility to exfiltrate data to cloud storage.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Web Service, Exfiltration to Cloud Storage
- **ATT&CK ID:** T1567, T1567.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (command="*--config*" command="*--no-check-
↪certificate*" command="*copy*") OR (("process"="*\rclone.exe" OR description=
↪"Rsync for cloud storage") command IN ["*pass*", "*user*", "*copy*", "*sync*", "*config*",
↪"*lsd*", "*remote*", "*ls*", "*mega*", "*pcloud*", "*ftp*", "*ignore-existing*", "*auto-
↪confirm*", "*transfers*", "*multi-thread-streams*", "*no-check-certificate*"])
```

2.56 LP_UAC Bypass via SDCLT

- **Trigger Condition:** Attempt to bypass User Account Control (UAC) via SDCLT.exe or modification to registry keys HKCU:\Software\Classes\exefile\shell\runas\command\isolatedCommand and HKCU:\Software\Classes\Folder\shell\open\command indicating UAC bypass via registry key manipulation of sdclt.exe.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Account Control
- **ATT&CK ID:** T1548, T1548.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
(norm_id=WindowsSysmon event_id=1 parent_process="*\sdclt.exe" parent_command=
↪"*kickoffelev*" integrity_level=High -"process" IN ["C:\Windows\SysWOW64\sdclt.exe",
↪"C:\Windows\System32\sdclt.exe", "C:\Windows\SysWOW64\control.exe",
↪"C:\Windows\System32\control.exe", "C:\Windows\System32\WerFault.exe",
↪"C:\Windows\SysWOW64\WerFault.exe", "C:\Windows\System32\wermgr.exe",
↪"C:\Windows\SysWOW64\wermgr.exe"]) OR (norm_id=WindowsSysmon event_id="13"
↪target_object IN ["*\Classes\exefile\shell\runas\command\isolatedCommand*",
↪"*Classes\Folder\shell\open\command*"])
```

2.57 LP_Suspicious Binary Execution in User Directory

- **Trigger condition:** Execution of binaries from the users directory by Microsoft Office software such as Word and Excel. This may indicate dropping and subsequent execution of payloads by malicious Microsoft Office documents.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Malicious File
- **ATT&CK ID:** T1204.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process IN ["*\WINWORD.EXE", " *\EXCEL.EXE",
↪ " *\POWERPNT.exe", " *\MSPUB.exe", " *\VISIO.exe", " *\MSACCESS.exe",
↪ " *\EQNEDT32.exe"] "process"="C:\Users\*.exe" - "process"=
↪ " *\Microsoft\Teams\current\Teams.exe"
```

2.58 LP_Suspicious WMIC Child Process

- **Trigger condition:** Suspicious child process of WMIC is detected. Adversaries can utilize this technique to execute arbitrary commands, payloads, and evade defenses by using Windows internal binary.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Windows Management Instrumentation
- **ATT&CK ID:** T1047
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\wmic.exe" - "process" IN [
↪ "C:\Windows\System32\conhost.exe", "C:\Windows\system32\wbem\WMIC.exe",
↪ "C:\Windows\syswow64\wbem\WMIC.exe", "C:\Windows\system32\WerFault.exe",
↪ "C:\Windows\SysWOW64\WerFault.exe"]
```

2.59 LP_Suspicious File Execution Using Wscript or Cscript

- **Trigger condition:** Execution of .jse, .vbe, .js and .vba file extensions using wscript or cscript. Adversaries can write malicious payloads in files with these extensions, execute them using wscript or cscript, and bypass detection.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Visual Basic, JavaScript
- **ATT&CK ID:** T1059.005, T1059.007
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" "process" IN ["*\wscript.exe", ".*\cscript.exe"] command
↪ IN [".*.jse*", ".*.vbe*", ".*.js*", ".*.vba*", ".*.vbs*", ".*.wsf*"] command IN ["*C:\Users*",
↪ ".*\AppData\Local\*", ".*\ProgramData\*", ".*\Temp\*"] -parent_process = ".*\winzip*" -
↪ command=".*.json*"
```

2.60 LP_BCDEdit Safe Mode Command Execution

- **Trigger condition:** Spawning of Boot Configuration Data Edit (BCDEdit) from suspicious processes, to configure a reboot into safe mode.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Inhibit System Recovery
- **ATT&CK ID:** T1490
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "process"=".*\bcdedit.exe" command IN ["*minimal*",
↪ ".*network*", ".*safebootalternateshell*", ".*delete*", ".*import*", ".*safeboot*"] parent_
↪ process IN ["*WINWORD.EXE", ".*\EXCEL.EXE", ".*\POWERPNT.EXE", ".*\MSACCESS.
↪ EXE", ".*\MSPUB.EXE", ".*\OUTLOOK.EXE", ".*\ftldr.exe", ".*\cscript.exe",
↪ ".*\powershell.exe", ".*\pwsh.exe", ".*\wscript.exe", ".*\cmd.exe", ".*\rundll32.exe",
↪ ".*\regsvr32.exe", ".*\mshta.exe", ".*\msbuild.exe"]
```

2.61 LP_Suspicious Encoded PowerShell Command Line

- **Trigger condition:** Suspicious PowerShell base64 encoded command is detected. Adversaries can use this technique to evade defense mechanisms by encoding and decoding payload.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*-e JAB*", "*-e JAB*", "*-e JAB*", "*-e JAB*", "*-e JAB*", "*-e JAB*", "*-en JAB*", "*-enc JAB*", "*-enc* JAB*", "*-w*", "*-hidden -e* JAB*", "* BA^J e-", "*-e SUVY|*", "*-e aWV4|*", "*-e SQBFAFgA*", "*-e aQBIAHgA*", "*-enc SUVY|*", "*-enc aWV4|*", "*-enc SQBFAFgA*", "*-enc aQBIAHgA*"] -command="*-ExecutionPolicy remotesigned *-user IN EXCLUDED_USERS
```

2.62 LP_Persistence Attack through Accessibility Process Feature

- **Trigger condition:** Accessibility features used to execute a command prompt or other backdoors are detected.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Accessibility Features
- **ATT&CK ID:** T1546, T1546.008
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 user="SYSTEM" parent_process IN ["*\\Utilman.exe",
→ "*\\winlogon.exe"] "process" IN ["*\\osk.exe", "*\\Magnify.exe", "*\\Narrator.exe",
→ "*\\sethc.exe", "*\\utilman.exe", "*\\ATBroker.exe", "*\\DisplaySwitch.exe"] -file IN ["osk.
→ exe", "sethc.exe", "utilman2.exe", "DisplaySwitch.exe", "ATBroker.exe", "ScreenMagnifier.
→ exe", "SR.exe", "Narrator.exe", "magnify.exe"]
```

2.63 LP_Firewall Rule Addition via Netsh Detected

- **Trigger condition:** A connection allowed by a port or application on the Windows firewall is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify System Firewall
- **ATT&CK ID:** T1562, T1562.004
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*netsh* firewall add*"] -user IN EXCLUDED_
↪ USERS
```

2.64 LP_MSHTA Spawned by SVCHOST Detected

- **Trigger condition:** Microsoft HTML Application Host (MSHTA) binary spawned by the Svchost process is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Mshta
- **ATT&CK ID:** T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\svchost.exe" "process"="*\mshta.exe" -
↪ user IN EXCLUDED_USERS
```

2.65 LP_Exploitation of CVE-2019-1388 Detected

- **Trigger condition:** An exploitation attempt of CVE-2019-1388 in which the UAC consent dialogue used to invoke a Windows process running as LOCAL_SYSTEM is detected. CVE-2019-1388 is an elevation of privilege vulnerability in the Windows Certificate Dialog.
- **ATT&CK Category:** Privilege Escalation

- **ATT&CK Tag:** Exploitation for Privilege Escalation
- **ATT&CK ID:** T1068
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\consent.exe" "process"="*\iexplore.exe"
↪ "command="*http*" (integrity_level="System" OR user IN ["SYSTEM","*AUTHORI*",
↪ "*AUTORI*", "*AUKTORI*"])
```

2.66 LP_Sophos EPP Registry Modification

- **Trigger condition:** Modifying Sophos EPP Tamper Protection registry keys to turn off services is detected. Sophos EPP Tamper Protection is the service offered by the EPP that constantly checks if a malware or adversary or rogue employee turns off the AV services to avoid detection.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Set label=value target_object IN [
↪ "*\CurrentControlSet\Services\Sophos Endpoint*\SEDEnabled",
↪ "*\CurrentControlSet\Services\Sophos Endpoint*\SAVEEnabled "] detail="DWORD"
↪ (0x00000000)"
```

2.67 LP_Office365 Inbox Rule with Special Characters Created

- **Trigger condition:** A new inbox rule created on Office365 with a suspicious name made of only special characters is detected.
- **ATT&CK Category:** Collection
- **ATT&CK Tag:** Email Forwarding Rule
- **ATT&CK ID:** T1114.003

- **Minimum Log Source Requirement:** Office365
- **Query:**

```
norm_id=Office365 action="New-InboxRule" name=* | process regex("(?P<match>^[^a-
↪zA-Z0-9]*$)", "name") | search match=*
```

2.68 LP_Suspicious WerFault Process Creation

- **Trigger condition:** A *services.exe* spawns *werfault.exe* process from non-default paths is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\WerFault.exe" ("process"=
↪ "C:\Windows\WinSxS\*" OR -"process" IN ["C:\Windows\System32\*",
↪ "C:\Windows\SysWOW64\*"])
```

2.69 LP_Suspicious WerFault File Creation

- **Trigger condition:** A non-system process drops the *WerFault.exe* binary inside the *C:\Windows\WinSxS* folder is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=File label=Create path="C:\Windows\WinSxS\*" file="WerFault.exe" -"process"
↪ IN ["C:\Windows\System32\*", "C:\Windows\SysWOW64\*", "*C:\Windows\WinSxS\*"]
```

2.70 LP_Snake Malware Covert Store Registry Key Detected

- **Trigger condition:** A registry operation for the key `SECURITYPolicySecretsn` is detected. Snake Malware utilizes the registry key to store the encryption key.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(norm_id=WindowsSysmon event_id IN [12,13,14] target_object=
↳ "*SECURITY\Policy\Secrets\n") OR (norm_id=Winserver event_id=4657 path=
↳ "*SECURITY\Policy\Secrets\n")
```

2.71 LP_Suspicious WerFault Service Creation

- **Trigger condition:** A new service installed using the `WerFault.exe` file is detected. `WerFault.exe` is a system component that plays a crucial role in Windows operating systems. It manages system error reporting.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
norm_id=WinServer event_id IN [4697,7045] (file="WerFault.exe" OR path="*WerFault.
↳ exe") (path="C:\Windows\WinSxS\*" OR -path IN ["C:\Windows\System32*",
↳ "C:\Windows\SysWOW64*"])
```

2.72 LP_Suspicious Named Pipe Connection to Azure AD Connect Database

- **Trigger condition:** Named pipe connection to Azure AD Connect database from suspicious processes coming from command shells like PowerShell, which may indicate attackers attempting to dump plaintext credentials of AD and Azure AD connector account using tools such as AADInternals is detected.
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label=Pipe label=Connect pipe="*\tsql\query" -image IN [
↪ "\Program Files\Microsoft Azure AD Sync\Bin\miiserver.exe", "\Tools\Binn\SqlCmd.exe
↪ "]
```

2.73 LP_Suspicious Driver Loaded

- **Trigger condition:** Misuse of known drivers by adversaries for malicious purposes is detected. The driver itself are not malicious but are misused by threat actors. For this alert to trigger SUSPICIOUS_DRIVER list is required.
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Image label=Load image IN SUSPICIOUS_DRIVER
```

2.74 LP_AADInternals PowerShell Cmdlet Execution

- **Trigger condition:** Execution of *AADInternals* commandlets is detected. AADInternals (S0677) toolkit is a PowerShell module containing tools for administering and hacking Azure AD and Office 365. Adversaries use *AADInternals* to extract the credentials from the system where the AAD Connect server was installed and compromise the AAD environment.

- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id=WinServer event_source="Microsoft-Windows-PowerShell" event_id=4104
↪script_block IN AADINTERNALS_CMDLETS
```

2.75 LP_Suspicious Scheduled Task Creation via Masqueraded XML File

- **Trigger condition:** Creation of a suspicious scheduled task using an XML file with a masqueraded extension.
- **ATT&CK Category:** Persistence, Defense Evasion
- **ATT&CK Tag:** Masquerading, Match Legitimate Name or Location, Scheduled Task/Job and Scheduled Task
- **ATT&CK ID:** T1036, T1036.005, T1053 and T1053.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

```
label=create label="process" "process"="*\schtasks.exe" command IN ["*/create*", "*-
↪create*"] command IN ["*/xml*", "*-xml*"] (-integrity_level=system OR -integrity_
↪label=*system*) -command = *.xml* ((-parent_process IN [
↪"*.\\ProgramData\\OEM\\UpgradeTool\\CareCenter_*\\BUnzip\\Setup_msi.exe",
↪"*.\\Program Files\\Axis Communications\\AXIS Camera Station\\SetupActions.exe",
↪"*.\\Program Files\\Axis Communications\\AXIS Device Manager\\AdmSetupActions.exe",
↪"*.\\Program Files (x86)\\Zemana\\AntiMalware\\AntiMalware.exe", ".*\\Program
↪Files\\Dell\\SupportAssist\\pcdrcui.exe" ]) OR (-parent_process = ".*\\rundll32.exe"
↪command = ".*\\WINDOWS\\Installer\\MSI*.tmp,
↪zzzzInvokeManagedCustomActionOutOfProc" ))
```

2.76 LP_Suspicious Microsoft Equation Editor Child Process

- **Trigger condition:** Suspicious child process of Microsoft's equation editor is detected as a sign of possible exploitation of CVE-2017-11882, a vulnerability in Microsoft Office's Equation Editor component.

- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Exploitation for Client Execution
- **ATT&CK ID:** T1203
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

```
label="Process" label=Create parent_process="*\EQNEDT32.exe" - "process" IN [
↪ "C:\Windows\System32\WerFault.exe", "C:\Windows\SysWOW64\WerFault.exe"]
```

2.77 LP_Windows Error Process Masquerading

- **Trigger condition:** Suspicious Windows error reporting process behavior, where network connections are made after execution is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon

```
[norm_id=WindowsSysmon event_id=1 "process" IN ["*\WerMgr.exe", "\WerFault.exe"]][?]
↪ as s1 followed by [norm_id=WindowsSysmon event_id=3 "process" IN ["*\WerMgr.exe",
↪ "\WerFault.exe"]] as s2 within 1 minute on s1.process_guid=s2.process_guid | rename[?]
↪ s1.host as host, s1.user as user, s1.domain as domain, s1.image as image, s2.destination_
↪ address as destination_address, s2.destination_port as destination_port
```

2.78 LP_Bypass UAC via CMSTP Detected

- **Trigger condition:** Child processes of automatically elevated Microsoft Connection Manager Profile Installer instances like `cmstp.exe` are detected.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** CMSTP, Bypass User Account Control
- **ATT&CK ID:** T1218.003, T1548.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
( (label="Process" label=Create "process"="*\cmstp.exe" command IN ["*/s*", "*/au*",
↪ "*/ni*", "*/s*", "*/au*", "*/ni*"]) OR (norm_id=WindowsSysmon event_id=1 parent_
↪ process="*\DllHost.exe" parent_command IN ["*/Processid:{3E5FC7F9-9A51-4367-9063-
↪ A120244FBEC7}*","*/Processid:{3E000D72-A845-4CD9-BD83-80C07C3B881F}*","*/
↪ Processid:{BD54C901-076B-434E-B6C7-17C531F4AB41}*","*/Processid:{D2E7041B-2927-
↪ 42FB-8E9F-7CE93B6DC937}*","*/Processid:{E9495B87-D950-4AB5-87A5-
↪ FF6D70BF3E90}*"] integrity_level IN ["High", "System"]))) -user IN EXCLUDED_USERS
```

2.79 LP_Application Whitelisting Bypass via Dxcap Detected

- **Trigger condition:** Adversaries bypass process and/or signature-based defenses by execution of *Dxcap.exe* is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Trusted Developer Utilities Proxy Execution
- **ATT&CK ID:** T1127
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\dxcap.exe" command="*-c*" command="*.
↪ exe*" -user IN EXCLUDED_USERS
```

2.80 LP_Suspicious WMIC XSL Script Execution

- **Trigger condition:** Loading of a Windows Script module through WMIC by Microsoft Core XML Services (MSXML) process to bypass application whitelisting. Adversaries may abuse this functionality to execute arbitrary files while potentially bypassing application control.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** XSL Script Processing
- **ATT&CK ID:** T1220
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
[norm_id=WindowsSysmon event_id=1 file="wmic.exe" command IN ["*format*:*", "*/
↪format*:*", "*-format*:*"] -command IN ["*format:list*", "*format:table*",
↪"*format:htable", "*format:texttablesys*", "*format:texttable*", "*format:textvaluelist*",
↪"*format:TEXTVALUELIST*", "*format:csv*", "*format:value*"]] as s1 followed by
↪[norm_id=WindowsSysmon event_id=7 image IN ["*jscript.dll", "*vbscript.dll"]] as s2
↪within 2 minute on s1.process_guid=s2.process_guid | rename s1.process as "process",
↪s1.host as host, s1.domain as domain, s1.command as command, s2.image as loaded_
↪image
```

2.81 LP_Suspicious File Execution via MSHTA

- **Trigger condition:** Execution of javascript or VBScript files and other abnormal extension files executed via mshta binary is detected.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** JavaScript, Deobfuscate/Decode Files or Information, Mshta
- **ATT&CK ID:** T1059.007, T1140, T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\mshta.exe" command IN ["*javascript*",
↪"*vbscript*", "*.jpg*", "*.png*", "*.lnk*", "*.xls*", "*.doc*", "*.zip*"] -user IN
↪EXCLUDED_USERS
```

2.82 LP_Regsvr32 Anomalous Activity Detected

- **Trigger condition:** Various anomalies concerning regsvr32.exe are detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution, Regsvr32
- **ATT&CK ID:** T1218, T1218.010
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 ((image="*\regsvr32.exe" command="*\Temp\*")
↪OR (image="*\regsvr32.exe" parent_image="*\powershell.exe") OR (image=
↪"**\regsvr32.exe" parent_image="*\cmd.exe") OR (image="*\regsvr32.exe" command
↪IN ["*/i:http*scrobj.dll", "*/i:ftp*scrobj.dll"]) OR (image="*\wscript.exe" parent_image=
↪"**\regsvr32.exe") OR (image="*\EXCEL.EXE" command="*..\..\
↪\Windows\System32\regsvr32.exe *")) -user IN EXCLUDED_USERS
```

(continued from previous page)

2.83 LP_Execution of Trojanized 3CX Application

- **Trigger Condition:** Execution of the trojanized version of the 3CX Desktop is detected. 3CX Desktop versions 18.12.407 and 18.12.416 are known to be trojanized by the Lazarus Group and are also signed using the 3CX signature.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masqueradings
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 file="3CXDesktopApp.exe" product IN ["*3CX Ltd*",
↪ ", "*3CX Desktop App*"] file_version IN ["*18.12.407*", "18.12.416*"]
```

2.84 LP_Msbuild Spawned by Unusual Parent Process

- **Trigger condition:** Suspicious use of *msbuild.exe* by an uncommon parent process is detected. *msbuild.exe* is a legitimate Microsoft tool used for building and deploying software applications.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Trusted Developer Utilities Proxy Execution, MSBuild
- **ATT&CK ID:** T1127, T1127.001
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label=Create label="Process" "process"="*\\MSBuild.exe" -parent_process in ["*\\devenv.
↪ exe", "*\\cmd.exe", "*\\msbuild.exe", "*\\python.exe", "*\\explorer.exe", "*\\nuget.exe"]
```

2.85 LP_Suspicious Files Designated as System Files Detected

- **Trigger condition:** The execution of the **+s** option of the **attrib** command is detected to designate scripts or executable files in suspicious locations as system files, hiding them from users and making them difficult to detect or remove. **attrib.exe** is a Windows command-line utility that allows users to adjust file or folder attributes such as read-only, hidden and system.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hide Artifacts, Hidden Files and Directories
- **ATT&CK ID:** T1564, T1564.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Create label="Process" "process"="*\attrib.exe" command = "* +s *" command in [
  ↳ "** %*", "**\Users\Public\*", "**\AppData\Local\*", "**\ProgramData\*",
  ↳ "**\Windows\Temp\*" ] command in ["*.bat*", "*.dll*", "*.exe*", "*.hta*", "*.ps1*", "*.
  ↳ vbe*", "*.vbs*"] -command="*\Windows\TEMP\*.exe"
```

2.86 LP_Bypass User Account Control using Registry

- **Trigger condition:** Bypass of User Account Control (UAC) is detected. Adversaries bypass UAC mechanisms to elevate process privileges on the system. The alert queries for `*\mscfile\shell\open\command\*` or `*\ms-settings\shell\open\command\*`.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Account Control
- **ATT&CK ID:** T1548, T1548.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon ((event_id=12 event_type=*Create*) OR (event_id=13 event_
  ↳ type=SetValue)) target_object IN ["*\mscfile\shell\open\command\*", "*\ms-
  ↳ settings\shell\open\command\*"]
```

2.87 LP_Unsigned Image Loaded Into LSASS Process

- **Trigger condition:** Loading unsigned images like DLL or EXE into the LSASS process.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, LSASS Memory
- **ATT&CK ID:** T1003, T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 image="*\lsass.exe" signed="false" -user IN
↪ EXCLUDED_USERS
```

2.88 LP_Usage of Sysinternals Tools Detected

- **Trigger condition:** Usage of Sysinternals tools due to the addition of *accepteula* key to a registry.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label=Registry label=Set target_object="*\EulaAccepted") or (label=Create label=
↪ "Process" command IN ["* -accepteula*", "* /accepteula*"])
```

2.89 LP_Microsoft SharePoint Remote Code Execution Detected

- **Trigger condition:** The execution of a remote code in Microsoft SharePoint (CVE-2019-19781).
- **ATT&CK Category:** Initial Access

- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Web server
- **Query:**

```
request_method=POST (url='*_layouts/15/Picker.aspx*WebControls.ItemPickerDialog*'
↪ OR resource='*_layouts/15/Picker.aspx*WebControls.ItemPickerDialog*')
```

2.90 LP_DenyAllWAF SQL Injection Attack

- **Trigger condition:** DenyAllWAF detects SQL injection attack.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** DenyAll WAF
- **Query:**

```
norm_id=DenyAllWAF label=SQL label=Injection
```

2.91 LP_Malicious use of Scriptrunner Detected

- **Trigger condition:** The malicious use of *Scriptrunner.exe* is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution
- **ATT&CK ID:** T1218
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" ("process"="*\ScriptRunner.exe" OR file="ScriptRunner.
↪ exe") command="*-appvscript *"
```

2.92 LP_Suspicious process related to Rundll32 Detected

- **Trigger condition:** A suspicious process related to *RunDLL32.exe* is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rundll32
- **ATT&CK ID:** T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" (command IN ["*javascript:*", "*.RegisterXLL*"] OR
↪ (command="*url.dll*" command="*OpenURL*") OR (command="*url.dll*" command=
↪ "*OpenURLA*") OR (command="*url.dll*" command="*FileProtocolHandler*") OR
↪ (command="*zipfldr.dll*" command="*RouteTheCall*") OR (command="*shell32.dll*"
↪ command="*Control_RunDLL*") OR (command="*shell32.dll*" command="*ShellExec_
↪ RunDLL*") OR (command="*mshtml.dll*" command="*PrintHTML*") OR (command=
↪ "*advpack.dll*" command="*LaunchINFSection*") OR (command="*advpack.dll*"
↪ command="*RegisterOCX*") OR (command="*ieadvpack.dll*" command=
↪ "*LaunchINFSection*") OR (command="*ieadvpack.dll*" command="*RegisterOCX*")
↪ OR (command="*ieframe.dll*" command="*OpenURL*") OR (command="*shdocvw.dll*
↪ " command="*OpenURL*") OR (command="*syssetup.dll*" command=
↪ "*SetupInfObjectInstallAction*") OR (command="*setupapi.dll*" command=
↪ "*InstallHinfSection*") OR (command="*pcwutl.dll*" command="*LaunchApplication*
↪ ") OR (command="*dfshim.dll*" command="*ShOpenVerbApplication*"))
```

2.93 LP_Javascript conversion to executable Detected

- **Trigger condition:** A windows executable *jsc.exe* is used to convert javascript files to craft malicious executables.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Trusted Developer Utilities Proxy Execution
- **ATT&CK ID:** TT1127
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" "process"="*\\jsc.exe" command="*.js"
```

2.94 LP_Suspicious Execution of Gpscript Detected

- **Trigger condition:** A group policy script *gpscript.exe* is used to execute logon or startup scripts configured in Group Policy.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution
- **ATT&CK ID:** T1218
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" "process"="*\gpscript.exe" command IN ["*/logon*", "*/startup*"]
```

2.95 LP_Proxy Execution via Desktop Setting Control Panel

- **Trigger condition:** A windows internal binary *rundll32* with *desk.cpl* is used to execute spoof binary with ".cpl" extension.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rundll32
- **ATT&CK ID:** T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "process"="*\rundll32.exe" command="*desk.cpl*InstallScreenSaver*.scr"
```

2.96 LP_Xwizard DLL Side Loading Detected

- **Trigger condition:** The use of *xwizard* binary from the non-default directory is detected.
- **ATT&CK Category:** Defense Evasion

- **ATT&CK Tag:** DLL Side-Loading
- **ATT&CK ID:** T1574.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\xwizard.exe" - "process"=
↪ "C:\Windows\System32\*"
```

2.97 LP_DLL Side Loading Via Microsoft Defender

- **Trigger condition:** An execution of *mpcmdrun* binary from non default path is detected.
- **ATT&CK Category:** Persistence, Defense Evasion
- **ATT&CK Tag:** DLL Side-Loading
- **ATT&CK ID:** T1574.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Image label=Load "process" IN ["*\MpCmdRun.exe", "*\NisSrv.exe"] - "process" IN [
↪ "C:\Program Files\Windows Defender\*", "C:\ProgramData\Microsoft\Windows
↪ Defender\Platform\*"] image="*\mpclient.dll"
```

2.98 LP_ZIP File Creation or Extraction via Printer Migration CLI Tool

- **Trigger condition:** The creation or extraction of .zip file via *printbrm* utility is detected.
- **ATT&CK Category:** Defense Evasion, Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer, NTFS File Attributes
- **ATT&CK ID:** T1105, T1564.004
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "process"="*\printbrm.exe" command="*f*" command=
↳ "*.zip"
```

2.99 LP_Credentials Capture via Rpcping Detected

- **Trigger condition:** The creation of Remote Procedure Call (RPC) via Rpcping binary is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "process"="*\rpcping.exe" command="*s*" (
↳ (command="*u*" command="*NTLM*") OR (command="*t*" command="*ncacn_np*"
↳ ))
```

2.100 LP_Suspicious ConfigSecurityPolicy Execution Detected

- **Trigger condition:** A local file upload via ConfigSecurityPolicy binary to attack the control server is detected.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Web Service
- **ATT&CK ID:** T1567
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "process"="*\ConfigSecurityPolicy.exe" command IN [
↳ "https://*", "http://*", "ftp://*"]
```

2.101 LP_C-Sharp Code Compilation Using Ilasm Detected

- **Trigger condition:** C# code is either compiled into executables or into DLL using Ilasm utility.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Trusted Developer Utilities Proxy Execution
- **ATT&CK ID:** T1127
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label="Create" ("process"="*\ilasm.exe" OR file="ilasm.exe")
```

2.102 LP_Process Dump via Resource Leak Diagnostic Tool

- **Trigger condition:** A process dump is detected using a Microsoft Windows native tool *rdrlleakdiag.exe*.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create ("process"="*\RdrLeakDiag.exe" or file="RdrLeakDiag.exe  
↪") command="*fullmemdmp*"
```

2.103 LP_Suspicious DLL execution via Register-Cimprovider

- **Trigger condition:** A dll file load/execution is detected using a Microsoft Windows native tool *Register-Cimprovider.exe*.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hijack Execution Flow

- **ATT&CK ID:** TT1574
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\register-cimprovider.exe" command="*-
↳path*" command="*dll*"
```

2.104 Accessibility features - Process

- **Trigger condition:** Adversaries establish persistence and/or elevate privileges by executing malicious content by process features.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Accessibility Features
- **ATT&CK ID:** T1546,T1546.008
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 parent_image="*winlogon.exe" (image="*sethc.
↳exe" or image="*utilman.exe" or image="*osk.exe" or image="*magnify.exe" or
↳image="*displayswitch.exe" or image="*narrator.exe" or image="*atbroker.exe") -
↳user IN EXCLUDED_USERS
```

2.105 LP_Accessibility Features-Registry

- **Trigger condition:** An adversary establish persistence and/or elevates privileges by executing malicious content, replacing accessibility feature binaries, pointers, or references to these binaries in the registry.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Accessibility Features
- **ATT&CK ID:** T1546, T1546.008
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) target_object=
↳ "*HKLM\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Image File Execution
↳ Options\*" -user IN EXCLUDED_USERS
```

2.106 LP_Active Directory DLLs Loaded By Office Applications

- **Trigger condition:** Kerberos DLL or DSParse DLL loaded by the Office products like WinWord, Microsoft PowerPoint, Microsoft Excel or Microsoft Outlook is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Malicious File
- **ATT&CK ID:** T1204.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process" IN ["*\winword.exe*", "*\powerpnt.exe*",
↳ ", "*\excel.exe*", "*\outlook.exe*", "*\mspub.exe", "*\onenote.exe", "*\onenoteim.exe",
↳ "] image IN ["*\kerberos.dll*", "*\c.dll*"]
```

2.107 LP_DCSync detected

- **Trigger condition:** Misuse of Active Directory Replication Service (ADRS) from a non-machine account to request credentials or DC Sync by creating a new SPN.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, DCSync
- **ATT&CK ID:** T1003, T1003.006
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
((norm_id=WinServer event_id=4662 access="0x100" properties IN ["*1131f6aa-9c07-11d1-
↳ f79f-00c04fc2dcd2*", "*1131f6ad-9c07-11d1-f79f-00c04fc2dcd2*", "*89e95b76-444d-
↳ 4c62-991a-0facbeda640c*", "*Replicating Directory Changes All*"] -user="$*" -user=
↳ "MSOL_*) OR (norm_id=WinServer event_id=4742 service="*GC/*"))
```

2.108 LP_Active Directory Replication User Backdoor

- **Trigger condition:** Modification of the security descriptor of a domain object for granting Active Directory replication permissions to a user.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** File and Directory Permissions Modification, Windows File and Directory Permissions Modification, DCSync
- **ATT&CK ID:** T1222, T1222.001, T1003.006
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5136 ldap_display="ntsecuritydescriptor" attribute_value?
↪ IN ["*1131f6aa-9c07-11d1-f79f-00c04fc2dcd2*", "*1131f6ad-9c07-11d1-f79f-
↪ 00c04fc2dcd2*", "*89e95b76-444d-4c62-991a-0facbeda640c*"] -user IN EXCLUDED_
↪ USERS
```

2.109 LP_Activity Related to NTDS Domain Hash Retrieval

- **Trigger condition:** Copying of the* ntds.dit* file, which is a database that stores Active Directory data, such as users, groups, security descriptors, and password hashes.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, NTDS
- **ATT&CK ID:** T1003,T1003.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create command IN [ "*vssadmin.exe Delete Shadows*",
↪ "*vssadmin create shadow /for=C:*", "*copy \\?
↪ \GLOBALROOT\Device\*\windows\ntds\ntds.dit*", "*copy \\?
↪ \GLOBALROOT\Device\*\config\SAM*", "*vssadmin delete shadows /for=C:*", "*reg?
↪ SAVE HKLM\SYSTEM*", "*esentutl.exe /y /vss *\ntds.dit*", "*esentutl.exe /y /vss *\SAM*
↪ ", "*esentutl.exe /y /vss *\SYSTEM*" ]
```

2.110 LP_AD Object WriteDAC Access Detected

- **Trigger condition:** WRITE_DAC, which can modify the discretionary access-control list (DACL) in the object security descriptor, is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** File and Directory Permissions Modification
- **ATT&CK ID:** T1222
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4662 object_server="DS" access_mask=0x40000 object_
↪ type IN ["19195a5b-6da0-11d0-afd3-00c04fd930c9", "domainDNS"] -user IN [?]
↪ EXCLUDED_USERS
```

2.111 LP_AD Privileged Users or Groups Reconnaissance Detected

- **Trigger condition:** *priv* users or groups recon based on 4661 event ID and privileged users or groups SIDs are detected. The object names must be; domain admin, KDC service account, admin account, enterprise admin, group policy creators and owners, backup operator, or remote desktop users.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Account Discovery, Local Account, Domain Account
- **ATT&CK ID:** T1087,T1087.001,T1087.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4661 object_type IN ["SAM_USER", "SAM_GROUP"] [?]
↪ object_name IN ["*-512", "*-502", "*-500", "*-505", "*-519", "*-520", "*-544", "*-551",
↪ "*-555", "*admin*"] -user IN EXCLUDED_USERS
```

2.112 LP_Addition of SID History to Active Directory Object

- **Trigger condition:** Addition of SID History to Active Directory Object is detected. An attacker can use the SID history attribute to gain additional privileges.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Access Token Manipulation, SID-History Injection
- **ATT&CK ID:** T1134,T1134.005
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer (event_id IN ["4765", "4766"] OR (event_id=4738 -sid_history="%  
↪%1793" sid_history=*)) -user IN EXCLUDED_USERS
```

2.113 LP_Admin User Remote Logon Detected

- **Trigger condition:** Successful remote login by the administrator depending on the internal pattern is detected.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4624 logon_type="10" (authentication_package=  
↪ "Negotiate" OR package="Negotiate") user="Admin-*" -user IN EXCLUDED_USERS |  
↪ rename package as authentication_package
```

2.114 LP_Adwind RAT JRAT Detected

- **Trigger condition:** The applications like javaw.exe, cscript in the AppData folder, or set values of Windows Run* register used by Adwind or JRAT are detected.

- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, Visual Basic, JavaScript/JScript, Windows Command Shell, PowerShell
- **ATT&CK ID:** T1059, T1059.001, T1059.003, T1059.005, T1059.007
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
(event_id=1 command IN ["*\AppData\Roaming\Oracle*\java*.exe ", "*cscript.exe",
↳ *Retrive*.vbs *"]) OR (event_id=11 file IN ["*\AppData\Roaming\Oracle\bin\java*.exe ",
↳ "*\Retrive*.vbs"]) OR (event_id=13 target_object=
↳ "HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run*" detail="%AppData
↳ %\Roaming\Oracle\bin\*")
```

2.115 LP_Apache Struts 2 Remote Code Execution Detected

- **Trigger condition:** A remote code execution vulnerability (CVE-2017-5638) in Apache Struts 2 is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** ApacheTomcat
- **Query:**

```
norm_id=ApacheTomcatServer label=Content label=Invalid label=Type | norm on content_
↳ type #cmd=<command:quoted>
```

2.116 LP_AppCert DLLs Detected

- **Trigger condition:** Adversaries establish persistence and/or elevate privileges by executing malicious content triggered by AppCert DLLs loaded into processes.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, AppCert DLLs

- **ATT&CK ID:** T1546, T1546.009
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) target_object=
↳ "*\System\CurrentControlSet\Control\Session Manager\AppCertDlls\*" -user IN EXCLUDED_USERS
```

2.117 LP_Application Shimming - File Access Detected

- **Trigger condition:** Adversaries establish persistence or elevate privileges by executing malicious content initiated by application shims is detected.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Application Shimming
- **ATT&CK ID:** T1546, T1546.011
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon ((event_id=11 file="*C:\Windows\AppPatch\Custom\*" or
↳ (event_id=1 "process"="*\sdbinst.exe") or (event_id IN [12,13,14] target_object=
↳ "*\SOFTWARE\Microsoft\Windows NT\CurrentVersion\AppCompatFlags\InstalledSDB\*"
↳ ")) -user IN EXCLUDED_USERS
```

2.118 LP_Application Whitelisting Bypass via Dnx Detected

- **Trigger condition:** Execution of Dnx binary with ConsoleApp commandline argument is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Compile After Delivery, Signed Binary Proxy Execution
- **ATT&CK ID:** T1027.004, T1218
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\dnx.exe" command="*ConsoleApp*" -user
↪ IN EXCLUDED_USERS
```

2.119 LP_Audio Capture Detected

- **Trigger condition:** The use of Powershell, sound recorder application, or command to get the audio device is detected. Adversaries attempt to leverage peripheral devices or applications to obtain audio recordings for sensitive conversations.
- **ATT&CK Category:** Collection
- **ATT&CK Tag:** Audio Capture
- **ATT&CK ID:** T1123
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 ((image="*SoundRecorder.exe" and command="*/
↪ FILE*") or command="*Get-AudioDevice*" or command="*WindowsAudioDevice-
↪ Powershell-Cmdlet*") -user IN EXCLUDED_USERS
```

2.120 LP_Authentication Package Detected

- **Trigger Condition:** The LSA process loaded by services other than lsass, svchost, msisexec and services is detected. Windows authentication package DLLs are loaded by the Local Security Authority (LSA) process at the system start. Adversaries may abuse authentication packages to execute DLLs when the system boots.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Authentication Package, Security Support Provider
- **ATT&CK ID:** T1547.002, T1547.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id IN [12,13,14] -event_type=INFO (target_object=
↪ "*\SYSTEM\CurrentControlSet\Control\Lsa\*" ) -"process" in [
↪ "*C:\WINDOWS\system32\lsass.exe", "*C:\Windows\system32\svchost.exe",
↪ "*C:\Windows\system32\services.exe", "C:\Windows\system32\msisexec.exe"]
```

2.121 LP_Autorun Keys Modification Detected

- **Trigger Condition:** Modification of autostart extensibility point (ASEP) in the registry is detected. ASEP allows a particular program to run automatically when a user logs into the system. Adversaries may achieve persistence by adding a program to a startup folder or referencing it with a Registry run key.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Registry Run Keys / Startup Folder
- **ATT&CK ID:** T1547, T1547.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Set label=Value -event_type=info target_object IN [
  ↳ "\\*\\software\\Microsoft\\Windows\\CurrentVersion\\Run*", "\\*\\software\\Microsoft\\Windows
  ↳ NT\\CurrentVersion\\Winlogon\\Userinit*", "\\*\\software\\Microsoft\\Windows
  ↳ NT\\CurrentVersion\\Winlogon\\Shell*",
  ↳ "\\*\\Microsoft\\Windows\\CurrentVersion\\Policies\\Explorer\\Run",
  ↳ "\\*\\software\\Microsoft\\Windows NT\\CurrentVersion\\Windows*",
  ↳ "\\*\\software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\User Shell Folders*"] detail IN [
  ↳ "*C:\\Windows\\Temp\\*", "*C:\\$Recycle.bin\\*", "*C:\\Temp\\*", "*C:\\Users\\Public\\*",
  ↳ "*C:\\ProgramData\\*", "*C:\\Users\\Default\\*", "*C:\\Users\\Desktop\\*",
  ↳ "*\\AppData\\Local\\*", "*Public\\*", "*wscript*", "*cscript*", "*powershell.exe*"] -detail=
  ↳ "\\*\\AppData\\Local\\Microsoft\\Teams\\Update.exe *"
```

2.122 LP_Bloodhound and Sharphound Hack Tool Detected

- **Trigger Condition:** Command-line parameters used by Bloodhound and Sharphound hack tools are detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Account Discovery
- **ATT&CK ID:** T1087
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create (("process" IN ["*\Bloodhound.exe*", "*\SharpHound.exe*"
↪"]) OR (command IN ["* -CollectionMethod All *", "* --CollectionMethods Session *", "* -
↪-Loop --Loopduration *", "* --PortScanTimeout *", "*.exe -c All -d *", "*Invoke-
↪Bloodhound*", "*Get-BloodHoundData*"]) OR (command="* -JsonFolder *"
↪command="* -ZipFileName *") OR (command="* DCOOnly *" command="* --
↪NoSaveCache *") OR (application="*SharpHound*" description="*SharpHound*"
↪vendor IN ["*SpecterOps*", "*evil corp*"])))
```

2.123 LP_BlueMushroom DLL Load Detected

- **Trigger Condition:** Suspicious dynamic-link libraries (DLLs) loading from the AppData local path. Adversaries can inject DLLs from AppData into processes to evade process-based defenses and elevate privileges.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Regsvr32, DLL Side-Loading
- **ATT&CK ID:** T1218.010, T1574.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command = "*\regsvr32*" command = "*\AppData\Local\*"
↪" command = "*\DllEntry*" command = "*.dll*" -user IN EXCLUDED_USERS
```

2.124 LP_Remote Thread Creation via Cactustorch

- **Trigger Condition:** Creation of a remote thread from CACTUSTORCH. Adversaries use this for proxy execution of their malicious payloads.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Process Hollowing, Visual Basic, JavaScript, Mshta
- **ATT&CK ID:** T1055.012, T1059.005, T1059.007, T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Remote" label="Thread" label="Create" "process" IN ["*\System32\cscript.exe",
↪"\System32\wscript.exe", "*\System32\mshta.exe", "*\winword.exe", "*\excel.exe"]
↪image="*\SysWOW64\*" -start_module=* -user IN EXCLUDED_USERS
```

2.125 LP_Call to a Privileged Service Failed

- **Trigger Condition:** The privileged service call using *LsaRegisterLogonProcess* fails.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** Valid Account
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4673 service="LsaRegisterLogonProcess()" event_type=
↪ "*Failure*" -user IN EXCLUDED_USERS
```

2.126 LP_Capture a Network Trace with netsh

- **Trigger Condition:** Network trace captured via *netsh.exe* trace functionality is detected.
- **ATT&CK Category:** Discovery, Credential Access
- **ATT&CK Tag:** Network Sniffing
- **ATT&CK ID:** T1040
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=create ("process"="*\netsh.exe" OR file="netsh.exe") command=
↪ "*trace*" command="*start*"
```

2.127 LP_CEO Fraud - Possible Fraudulent Email Behavior

- **Trigger Condition:** An email received from a threat source in the internal network exhibits fraudulent behavior. For this alert to work, you must update the following:
 - HOME_DOMAIN, which is the list of selected domain names. For example, logpoint.com
 - MANAGERS, which is the list of selected managers and executives. For example, Alice

- SERVER_ADDRESS, which is the list of trusted clients or servers from where the emails are received.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** Exchange MT
- **Query:**

```
norm_id=ExchangeMT event_id=receive sender=* receiver IN HOME_DOMAIN original_
↪ client_address=* -original_client_address IN SERVER_ADDRESS | norm on sender
↪ <target_manager:all>@<domain:string> |
norm on message_id @<original_domain:'.*'><:'\>'> | search target_manager IN
↪ MANAGERS
```

2.128 LP_Certutil Encode Detected

- **Trigger Condition:** The *certutil* command, sometimes used for data exfiltration, is used to encode files.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Obfuscated Files or Information
- **ATT&CK ID:** T1027
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 command IN ["certutil -f -encode *", "certutil.exe -
↪ f -encode *", "certutil -encode -f *", "certutil.exe -encode -f *"] -user IN EXCLUDED_
↪ USERS
```

2.129 LP_Change of Default File Association Detected

- **Trigger Condition:** A registry value is set to change the file association. Adversaries establish persistence by executing malicious content triggered by a file type association.
- **ATT&CK Category:** Persistence, Privilege Escalation

- **ATT&CK Tag:** Event Triggered Execution, Change Default File Association
- **ATT&CK ID:** T1546, T1546.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label=Registry label=Set label=Value target_object="*HKEY_
↪CLASSES_ROOT\mscfile*" detail in ["*powershell*", "*.exe*", "*.dat*"]
```

2.130 LP_Citrix ADC VPN Directory Traversal Detected

- **Trigger Condition:** The exploitation of directory traversal vulnerability (CVE-2019-19781) in Citrix ADC is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** External Remote Services
- **ATT&CK ID:** T1133
- **Minimum Log Source Requirement:** Webserver, Firewall
- **Query:**

```
norm_id=*(url="*/../vpns/*" OR resource="*/../vpns/*")
```

2.131 LP_Clear Command History

- **Trigger Condition:** Command line arguments to delete console history are detected. Adversaries can use this technique to remove the traces of their executed commands.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Clear Command History
- **ATT&CK ID:** T1070.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*rm (Get-PSReadlineOption).
↪HistorySavePath*", "*del (Get-PSReadlineOption).HistorySavePath*", "*Set-
↪PSReadlineOption -HistorySaveStyle SaveNothing*", "*Remove-Item (Get-
↪PSReadlineOption).HistorySavePath*"]
```

2.132 LP_Clearing of PowerShell Logs Detected

- **Trigger Condition:** Erasing PowerShell's console history logs. Console history logs are records of commands executed in the PowerShell console. Adversaries can use this technique to remove traces of executed PowerShell commands to cover their malicious activity.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indicator Removal
- **ATT&CK ID:** T1070
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
(norm_id=WinServer event_id=4103 command="Remove-Item" payload=
↪"*consolehost*history*") OR (label=File label=Delete (object="ConsoleHost_history.txt
↪" OR file="ConsoleHost_history.txt"))
```

2.133 LP_Clipboard Data Access Detected

- **Trigger Condition:** Adversaries collect data stored on a clipboard from users copying information within or between applications is detected.
- **ATT&CK Category:** Collection
- **ATT&CK Tag:** Clipboard Data
- **ATT&CK ID:** T1115
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="process" label=create ("process"="*\clip.exe" OR command="*Get-Clipboard*") -
↪user IN EXCLUDED_USERS
```

2.134 LP_Cmdkey Cached Credentials Recon Detected

- **Trigger Condition:** Usage of *cmdkey* to detect cached credentials.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Cached Domain Credentials
- **ATT&CK ID:** T1003.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image="*\cmdkey.exe" command="*/list *" -user
↪ IN EXCLUDED_USERS
```

2.135 LP_CMSTP Detected

- **Trigger Condition:** Adversaries abuse CMSTP for proxy execution of malicious code. *CMSTP.exe* accepts an installation information file (INF) as a parameter and installs a service profile leveraged for remote access connections. Also, the adversary supplies *CMSTP.exe* with INF files infected with malicious commands.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Signed Binary Proxy Execution, CMSTP
- **ATT&CK ID:** T1218, T1218.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image="*CMSTP.exe" -user IN EXCLUDED_USERS
```

2.136 LP_CMSTP Execution Detected

- **Trigger Condition:** Loading and execution of local or remote payloads using CMSTP. Adversaries abuse *CMSTP.exe* to load and execute DLLs and COM scriptlets (SCT) from remote servers, which can bypass appLocker and other whitelisting defences.
- **ATT&CK Category:** Defense Evasion, Execution

- **ATT&CK Tag:** CMSTP, Component Object Model
- **ATT&CK ID:** T1218.003, T1559.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(norm_id="WindowsSysmon" ( (event_id IN [12, 13] target_object="*\cmmgr32.exe*") OR
↪ (event_id=10 call_trace="*cmlua.dll*") OR (event_id=3 "process"="*\cmstp.exe" is_
↪ initiated="true" ) ) ) OR (label="Process" label=Create parent_process="*\cmstp.exe")
```

2.137 LP_CMSTP UAC Bypass via COM Object Access

- **Trigger Condition:** Loading and execution of local or remote payloads using CMSTP is detected. Adversaries abuse CMSTP.exe to bypass User Account Control and execute arbitrary commands from a malicious INF through an auto-elevated COM interface.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Bypass User Access Control, CMSTP
- **ATT&CK ID:** T1548.002, T1218.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 parent_process="*\DllHost.exe" parent_
↪ command IN ["*/Processid:{3E5FC7F9-9A51-4367-9063-A120244FBEC7}*", "*/Processid:
↪ {3E000D72-A845-4CD9-BD83-80C07C3B881F}*", "*/Processid:{BD54C901-076B-434E-
↪ B6C7-17C531F4AB41}*", "*/Processid:{D2E7041B-2927-42FB-8E9F-7CE93B6DC937}*",
↪ "*/Processid:{E9495B87-D950-4AB5-87A5-FF6D70BF3E90}*"] integrity_level IN ["High",
↪ "System"]
```

2.138 LP_CobaltStrike Process Injection Detected

- **Trigger Condition:** Creation of remote threat with specific characteristics that are typical for Cobalt Strike beacons.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Dynamic-link Library Injection

- **ATT&CK ID:** T1055.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=8 start_address IN ["*0B80", "*0C7C", "*0C88"] -
↪ user IN EXCLUDED_USERS
```

2.139 LP_Windows Command Line Execution with Suspicious URL and AppData Strings

- **Trigger Condition:** Execution of Windows command line with command line parameters URL and AppData string used by droppers.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 command IN ["cmd.exe /c *http://*%AppData%",
↪ "cmd.exe /c *https://*%AppData%"] -user IN EXCLUDED_USERS
```

2.140 LP_Compiled HTML File Detected

- **Trigger Condition:** Adversaries abuse Compiled HTML files (.chm) to conceal malicious code.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Signed Binary Proxy Execution, Compiled HTML File
- **ATT&CK ID:** T1218, T1218.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image="*hh.exe" -user IN EXCLUDED_USERS
```

2.141 LP_Console History Discovery Detected

- **Trigger Condition:** Adversaries attempt to get detailed information about the console history discovery is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** System Information Discovery
- **ATT&CK ID:** T1082
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*Get-History*", "*PSReadline\ConsoleHost_
↪ history.txt*", "(Get-PSReadlineOption).HistorySavePath*"]
```

2.142 LP_Control Panel Items - Registry Detected

- **Trigger Condition:** Adversaries abuse *control.exe* for proxy execution of malicious payloads.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution, Control Panel Items
- **ATT&CK ID:** T1218, T1218.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) (target_object=
↪ "*\SOFTWARE\Microsoft\Windows\CurrentVersion\Explorer\ControlPanel\NameSpace*"
↪ " or target_object="*\Software\Microsoft\Windows\CurrentVersion\Controls
↪ Folder\*\ShellEx\PropertySheetHandlers\*" or target_object=
↪ "*\Software\Microsoft\Windows\CurrentVersion\Control Panel\*" ) -user IN EXCLUDED_
↪ USERS
```

2.143 LP_Copy from Admin Share Detected

- **Trigger Condition:** Copying of file from a remote C\$ or ADMIN\$ share via copy command. Adversaries abuse these shares to gain unauthorized access to sensitive data on a network.
- **ATT&CK Category:** Lateral Movement, Command, Exfiltration
- **ATT&CK Tag:** SMB/Windows Admin Shares, Data from Network Shared Drive, Exfiltration Over Alternative Protocol
- **ATT&CK ID:** T1021.002, T1039, T1048
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ((command="*\\\\" command="*$") OR (command=
↪ "*\Sysvol\*")) ( ("process" IN ["*\robocopy.exe", "*\xcopy.exe"] OR file IN ["robocopy.
↪ exe", "xcopy.exe"]) OR (( "process"="*\cmd.exe" OR file="cmd.exe") command=
↪ "*copy*") OR (( "process" IN ["*\powershell.exe", "*\pwsh.exe"] OR file IN ["powershell.
↪ exe", "pwsh.dll"]) command IN ["*copy-item*", "*copy*", "*cpi*", "* cp *", "*move *",
↪ "*move-item*", "* mi *", "* mv *"] ) )
```

2.144 LP_Copyright Violation Email

- **Trigger Condition:** An email with copyright or infringement contents as message subject is received. For this alert to work, the list KNOWN_SERVER_HOST must be updated known mail servers.
- **ATT&CK Category:** Collection
- **ATT&CK Tag:** Email Collection
- **ATT&CK ID:** T1114
- **Minimum Log Source Requirement:** ExchangeMT
- **Query:**

```
device_category=Email* sender=* receiver=* -source_host IN KNOWN_SERVER_HOST71
↪ subject IN ["*copyright*", "*infringement*"] | norm on receiver <user:all>@
↪ <domain:string>
```

2.145 LP_CreateMiniDump Hacktool Detected

- **Trigger Condition:** Usage of the CreateMiniDump hack tool to dump memory in Windows. Adversaries use the tool to dump LSASS without Mimikatz, reducing the chances of getting flagged by antivirus software.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\CreateMiniDump.exe" OR hash_import=
↪ "4a07f944a83e8a7c2525efa35dd30e2f"
```

2.146 LP_CreateRemoteThread API and LoadLibrary

- **Trigger Condition:** Usage of CreateRemoteThread API and LoadLibrary functions to inject DLL into a process.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Dynamic-link Library Injection
- **ATT&CK ID:** T1055.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=8 start_module="*\kernel32.dll" start_function=
↪ "LoadLibraryA" -user IN EXCLUDED_USERS
```

2.147 LP_Command Obfuscation via Character Insertion

- **Trigger Condition:** Command obfuscation of command prompt by character insertion is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, Windows Command Shell

- **ATT&CK ID:** T1059, T1059.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create parent_process='*\cmd.exe' parent_command="cmd*/c*" | norm
↪ | norm on parent_command <command_match:'[^\w](s\^+e\^*t|s\^*e\^+t)[^\w]'\> | 
↪ filter command_match=*
```

2.148 LP_Command Obfuscation via Environment Variable Concatenation Reassembly

- **Trigger Condition:** Command obfuscation in command prompt by environment variable concatenation reassembly is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, Windows Command Shell
- **ATT&CK ID:** T1059, T1059.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create "parent_process"='*\cmd.exe' command='cmd*/c*' | norm
↪ on command <command_match:'%[^%]+%{4}\'> | rename command as changed_
↪ command, command_match as command | search command=*
```

2.149 LP_Credential Access via Input Prompt Detected

- **Trigger Condition:** A command executed to capture user input to obtain the credentials is detected.
- **ATT&CK Category:** Credential Access, Collection
- **ATT&CK Tag:** Input Capture, GUI Input Capture
- **ATT&CK ID:** T1056, T1056.002
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
((label="Process" label=Create command="*UI.promptforcredential*" command=
↳ "*getnetworkcredential*") OR (norm_id=WinServer event_id=4104 script_block="*UI.
↳ promptforcredential*" script_block="*getnetworkcredential*")) | rename script_block as?
↳ command
```

2.150 LP_Credential Dump Tools Dropped Files Detected

- **Trigger Condition:** Creation of files with a well-known filename, or parts of credential dump software or files produced by them.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory, Security Account Manager, NTDS, LSA Secrets, Cached Domain Credentials
- **ATT&CK ID:** T1003.001, T1003.002, T1003.003, T1003.004, T1003.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 path IN ["*\fgdump-log*", "*\kirbi*", "*\pwdump*",
↳ "*\pwhashes*", "*\wce_ccache*", "*\wce_krbtkts*"] OR file IN ["cachedump.exe",
↳ "cachedump64.exe", "DumpExt.dll", "DumpSvc.exe", "Dumpty.exe", "fgexec.exe",
↳ "lsremora.dll", "lsremora64.dll", "NTDS.out", "procdump64.exe", "pstgdump.exe",
↳ "pwdump.exe", "SAM.out", "SECURITY.out", "servpw.exe", "servpw64.exe", "SYSTEM.
↳ out", "test.pwd", "wceaux.dll"]
```

2.151 LP_Credential Dumping with ImageLoad Detected

- **Trigger Condition:** Attempts by adversaries to dump credentials using DLL images are detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Image" label="Load" image IN ["*C:\Windows\System32\saml.dll*",
↪ "*C:\Windows\System32\WinSCard.dll*", "*C:\Windows\System32\cryptdll.dll*",
↪ "*C:\Windows\System32\hid.dll*", "*C:\Windows\System32\vaultcli.dll*"] - "process" IN [
↪ "*\Sysmon.exe", "*\svchost.exe", "*\logonui.exe"] -user IN EXCLUDED_USERS
```

2.152 LP_Credentials Access in Files Detected

- **Trigger Condition:** Command line arguments containing pattern to search pass in files are detected. Adversaries can use this technique to search for local file systems and remote file shares to discover files containing insecurely stored credentials.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Unsecured Credentials, Credentials in Files
- **ATT&CK ID:** T1552, T1552.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*findstr* /si pass*", "*select-string -Pattern*
↪ pass*", "*list vdir*/text:password*"]
```

2.153 LP_Registry Enumeration for credentials Detected

- **Trigger Condition:** Search of the compromised system's registry to find and obtain insecurely stored credentials is detected. Adversaries can inspect the Windows Registry on compromised systems for insecurely stored credentials and passwords, as the registry contains configuration data used by the system and software.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Unsecured Credentials, Credentials in Registry
- **ATT&CK ID:** T1552, T1552.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\reg.exe" command="*query*" command="*/
↪ t*" command="*REG_SZ*" command="*/s*" (command=
↪ "*HKCU\Software\SimonTatham\PuTTY\Sessions*" OR (command="*/f*" command IN [
↪ "*HKLM*", "*HKCU*"])))
```

2.154 LP_Default Account privilege elevation followed by restoration of previous account state

- **Trigger Condition:** A user is added to a group or assigned privilege followed by restoration or removal from those rights.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Account Manipulation, Exploitation for Privilege Escalation
- **ATT&CK ID:** T1098, T1068
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
[label=User label=Group label=Management label=Add | rename target_user as
↪account]as s1 followed by [ label=User label=Group (label=Remove or label=Delete) -
↪target_user=*$ | rename target_user as account] as s2 on s1.account=s2.account |
↪rename s1.log_ts as ElevationTime_ts, s2.log_ts as RestorationTime_ts, s1.user as
↪UserElevation, s2.user as UserRestoration, s1.account as Account, s1.message as
↪PrivilegeElevation, s2.message as PrivilegeRestoration
```

2.155 LP_Default Blocked Inbound Traffic followed by Allowed Event

- **Trigger Condition:** Blocked inbound traffic followed by allowed traffic is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
[norm_id=*firewall or norm_id=*IDS label=Block or label=Deny label=Connection -source_
↪address IN HOMENET destination_address IN HOMENET] as s1 followed by [norm_
↪id=*firewall label=Allow label=Connection -source_address IN HOMENET destination_
↪address IN HOMENET] as s2 on s1.source_address=s2.source_address | rename s1.
↪source_address as source
```

2.156 LP_Default Blocked Outbound Traffic followed by Allowed Event

- **Trigger Condition:** Blocked outbound traffic followed by allowed traffic is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
[norm_id=*firewall or norm_id=*IDS label=Block or label=Deny label=Connection source_
↪address IN HOMENET -destination_address IN HOMENET] as s1 followed by [norm_
↪id=*firewall label=Allow label=Connection source_address IN HOMENET -destination_
↪address IN HOMENET]
as s2 on s1.source_address=s2.source_address | rename s1.source_address as source
```

2.157 LP_Default Brute Force Attack Successful

- **Trigger Condition:** Five failed users login attempts followed by a successful login from the same user within five minutes is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Brute Force
- **ATT&CK ID:** T1110
- **Minimum Log Source Requirement:** Windows, AWS, Firewall, WAF, Unix
- **Query:**

```
[label=User label=Login label=Fail -user=*$ | chart count() as cnt by user | search cnt > 5]
↪as s1 followed by [label=User label=Login label=Successful] as s2 on s1.user = s2.user
↪rename s2.user as user
```

2.158 LP_Default Connection Attempts on Closed Port

- **Trigger Condition:** A connection is established on closed ports. For the alert to work, you must update the list ALERT_OPEN_PORTS, which includes a list of open ports.
- **ATT&CK Category:** Command And Control, Persistence, Privilege Escalation
- **ATT&CK Tag:** Traffic Signaling, Port Knocking
- **ATT&CK ID:** T1205, T1205.001
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
label=Connection -destination_port IN ALERT_OPEN_PORTS source_address=*?  
↪ destination_port=*
```

2.159 LP_Default CPU Usage Status

- **Trigger Condition:** The use of CPU exceeds 90%.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Logpoint
- **Query:**

```
label=Metrics label=CPU label=Usage use>90
```

2.160 LP_Default Device Stopped Sending Logs for Half an Hour

- **Trigger Condition:** A device that has not sent logs for half an hour or more is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Service Stop

- **ATT&CK ID:** T1489
- **Minimum Log Source Requirement:** Firewall, IDS, IPS, Proxy Server, Windows, Unix
- **Query:**

```
| chart max(col_ts) as max_time_ts by device_ip | process current_time(a) as time | chart
↪ max(time-max_time_ts) as elapsed_time by max_time_ts, device_ip | search elapsed_
↪ time>1800
```

2.161 LP_Default DNS Tunneling Detection - Query Size

- **Trigger Condition:** Traffic with more than 64 characters in Application Layer Protocol and DNS is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Application Layer Protocol, DNS, Dynamic Resolution, Domain Generation Algorithms
- **ATT&CK ID:** T1071,T1071.004,T1568,T1568.002
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver, DNS Server
- **Query:**

```
norm_id=* "DNS" qname=* | process count_char(qname) as charCount | search
↪ charCount>64
```

2.162 LP_Default Excessive Blocked Connections

- **Trigger Condition:** 50 blocked or denied connections are observed from the same source within a minute.
- **ATT&CK Category:** Impact, Command and Control
- **ATT&CK Tag:** Network Denial of Service, Endpoint Denial of Service, Proxy
- **ATT&CK ID:** T1498, T1499, T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
[50 label=Connection (label=Deny OR label=Block) source_address=* having same source_
↪ address within 1 minute]
```

2.163 LP_Default File Association Changed

- **Trigger Condition:** Adversaries establish persistence and/or elevate privileges by executing malicious content triggered by a file type association.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Event Triggered Execution, Change Default File Association
- **ATT&CK ID:** T1546, T1546.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) (target_object=
↪ "*"SOFTWARE\Classes\*" or target_object=
↪ "*"SOFTWARE\Microsoft\Windows\CurrentVersion\Explorer\GlobalAssocChangedCounter*"
↪ "-user IN EXCLUDED_USERS
```

2.164 LP_Default Guest Account Added to Administrative Group

- **Trigger Condition:** A guest account is added to security group management.
- **ATT&CK Category:** Credential Access, Persistence, Privilege Escalation, Defense Evasion, Initial Access
- **ATT&CK Tag:** Account Manipulation, Abuse Elevation Control Mechanism, Bypass User Access Control, Valid Accounts
- **ATT&CK ID:** T1098, T1548, T1548.002, T1078
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label=Security label=Group label=Management label=Add (member_sid="S-1-5-21-*-501
↪ " OR target_id="S-1-5-21-*-501") | rename target_user as member, group as group_
↪ name
```

2.165 LP_Default IRC connection

- **Trigger Condition:** The IRC connection is detected. For this alert to work, you must update ALERT_IRC_PORT list with possible IRC ports.
- **ATT&CK Category:** Command and Control, Discovery
- **ATT&CK Tag:** Proxy, Network Service Scanning
- **ATT&CK ID:** T1090, T1046
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver
- **Query:**

```
(destination_port IN ALERT_IRC_PORT OR destination_port=6667)
```

2.166 LP_Default Malware Detected

- **Trigger Condition:** A malware or a virus is detected in the system.
- **ATT&CK Category:** Resource Development
- **ATT&CK Tag:** Develop Capabilities, Malware
- **ATT&CK ID:** T1587, T1587.001
- **Minimum Log Source Requirement:** Antivirus
- **Query:**

```
(label=Virus OR label=Malware ) (label=Detect OR label=Find) (virus=* OR malware=* OR
↪ file=* OR path=*) | rename malware as virus
```

2.167 LP_Default Malware not Cleaned

- **Trigger Condition:** A malware clean events including deletion, removal, and quarantine, is followed by detecting the same malware in the same host.
- **ATT&CK Category:** Discovery, Defense Evasion
- **ATT&CK Tag:** Network Service Scanning, Exploitation for Defense Evasion, Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1046, T1211, T1518, T1518.001

- **Minimum Log Source Requirement:** Antivirus
- **Query:**

```
norm_id=* malware=* action IN ["*delete*", "*remove*", "*quarantine*"] as s1 followed
↳ by [norm_id=* malware=* source_address=] as s2 on s1.malware=s2.malware | process
↳ compare(s1.source_address, s2.source_address) as match | search match=true | rename
↳ s1.source_address as source_address, s1.malware as malware
```

2.168 LP_Default Malware Removed

- **Trigger Condition:** Removal of malware or a virus from the system is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indicator Removal on Host, Obfuscated Files or Information, Indicator Removal from Tools
- **ATT&CK ID:** T1070, T1027, T1027.005
- **Minimum Log Source Requirement:** Antivirus
- **Query:**

```
(label=Virus OR label=Malware ) (label=Remove OR label=Clean OR label=Delete) -label=
↳ "Not" -label=Error | rename malware as virus | search virus=*
```

2.169 LP_Default Memory Usage Status

- **Trigger Condition:** Physical memory usage exceeds 90% of the total memory available is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Logpoint
- **Query:**

```
label=Metrics label=Memory label=Usage object="Physical Memory" use>90
```

2.170 LP_Default Network Configuration Change on Network Device

- **Trigger Condition:** A change in the core network event source, such as a router or switch, is detected.
- **ATT&CK Category:** Persistence, Credential Access, Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Modify Existing Service, Account Manipulation, Abuse Elevation Control Mechanism, Bypass User Access Control, Impair Defenses, Indicator Blocking, Modify Registry, Exploitation for Privilege Escalation
- **ATT&CK ID:** T1098, T1548, T1562, T1562.006, T1112, T1068
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

label=Network label=Configuration (label=Change OR label=Modify OR label=Reset OR ↪ label=Enable OR label=Disable OR label=Add or label=Delete or label=Undelete)

2.171 LP_Default Port Scan Detected

- **Trigger Condition:** Connection from multiple ports of a public IP address to a destination address is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Firewall, IDS, IPS, Webserver
- **Query:**

-source_address IN HOMENET destination_port= | chart distinct_count(destination_ ↪ port) as CNT by source_address, destination_address | search CNT>50*

2.172 LP_Default Possible Cross Site Scripting Attack Detected

- **Trigger Condition:** The script tag indicating the XSS attack is detected in the URL.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploiting Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver
- **Query:**

```
norm_id=* url IN ["*<script>*", "%3c%73%63%72%69%70%74%3e*", "%3cscript%3e*"]  

↪ or resource IN ["*<script>*", "%3c%73%63%72%69%70%74%3e*", "%3cscript%3e*"]  

↪ | rename resource as url
```

2.173 LP_Default Possible Non-PCI Compliant Inbound Network Traffic Detected

- **Trigger Condition:** An inbound connection is detected in secure devices over non-compliant ports as specified by PCI compliance practices. For this alert to work, you must update the list NON_PCI_COMPLIANT_PORT.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
label=Inbound label=Connection destination_port IN NON_PCI_COMPLIANT_PORT -  

↪ source_address IN HOMENET
```

2.174 LP_Default Possible SQL Injection Attack

- **Trigger Condition:** SQL character injection in the input field of a web application is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver
- **Query:**

```
norm_id=* url IN SQL_INJECTION_CHARACTER or resource IN SQL_INJECTION_
↳ CHARACTER | rename resource as url
```

2.175 LP_Default Possible System Instability State Detected

- **Trigger Condition:** The instability of a system is detected. For example, a system shut down or restarts more than five times within ten minutes. A correlation rule is designed to detect if a system has become unstable.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** System Shutdown/Reboot
- **ATT&CK ID:** T1529
- **Minimum Log Source Requirement:** OS
- **Query:**

```
[5 (-label=Require -label=Request -label=Reply) (label=Restart OR label=Shutdown OR
↳ label=Boot) having same device_ip within 10 minutes]
```

2.176 LP_Default PowerSploit and Empire Schtasks Persistence

- **Trigger Condition:** Creation of a *schtask* via PowerSploit or Empire default configuration.

- **ATT&CK Category:** Execution, Persistence, Privilege Escalation
- **ATT&CK Tag:** Scheduled Task, PowerShell
- **ATT&CK ID:** T1053.005, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process IN ["*\powershell.exe", ".*\pwsh.exe"]
↪ "process"="*\schtasks.exe" command = "*/Create*" command = "*/SC*" (command?)
↪ IN ["*ONLOGON*", ".*DAILY*", ".*ONIDLE*", ".*HOURLY*"] command = "*/TN*" (?)
↪ command = ".*Updater*" command = "*/TR*" command = ".*powershell*")
```

2.177 LP_Default Successful Login outside Normal Hour

- **Trigger Condition:** Successful user login beyond regular office hour is detected. You can adjust the regular work hour according to your company.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label=Login label=Successful target_user=* ((day_of_week(log_ts)=2 OR day_of_week(log_
↪ ts)=3 OR day_of_week(log_ts)=4 OR day_of_week(log_ts)=5 OR day_of_week(log_ts)=6) (?)
↪ (hour(log_ts)>0 hour(log_ts)<9) OR hour(log_ts)>17) OR (day_of_week(log_ts) IN [1, 7]) | (?)
↪ rename target_user as user
```

2.178 LP_Default Successful Login Using a Default Account

- **Trigger Condition:** Successful login attempts using a vendor default account is detected. The alert is essential for those organizations employing Payment Card Industry (PCI) Compliance.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access

- **ATT&CK Tag:** Valid Accounts, Default Accounts
- **ATT&CK ID:** T1078, T1078.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label=User label=Login label=Successful (target_user=* OR user=*) (target_user IN
↪ DEFAULT_USERS OR user IN DEFAULT_USERS) | rename target_user as user
```

2.179 LP_Default System Time Change

- **Trigger Condition:** The system time is changed or when Logpoint command `/opt/immune/installed/system/root_actions/*_ntp.sh` is executed.
- **ATT&CK Category:** Persistence, Impact
- **ATT&CK Tag:** Modify Existing Service, Data Destruction
- **ATT&CK ID:** T1485
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
(label=System label=Time label=Change) OR (label=Execute label=Command command=
↪ "/opt/immune/installed/system/root_actions/*_ntp.sh")
```

2.180 LP_Default TCP Probable SynFlood Attack

- **Trigger Condition:** Security devices detect ten TCP Syn flood events within a minute.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Endpoint Denial of Service
- **ATT&CK ID:** T1499
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

[10 TCP SYN having same source_address within 1 minute]

2.181 LP_Default Unapproved Port Activity Detected

- **Trigger Condition:** A user uses unapproved ports.
- **ATT&CK Category:** Defense Evasion, Persistence, Command And Control
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Port Monitors, Traffic Signaling, Port Knocking
- **ATT&CK ID:** T1547, T1547.01, T1205, T1205.001
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver
- **Query:**

```
norm_id=* source_port IN UNAPPROVED_PORT or destination_port IN UNAPPROVED_
↪PORT or port IN UNAPPROVED_PORT | rename source_port as port, destination_port
↪as port
```

2.182 LP_Default Unusual Number of Failed Vendor User Login

- **Trigger Condition:** Failed user logins using default credentials for more than 10 times are detected. For this alert to work, you must update the list DEFAULT_USERS with default vendor user names.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts, Default Accounts
- **ATT&CK ID:** T1078, T1078.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label=User label=Login label=Fail (target_user=* OR user=*) (target_user IN DEFAULT_
↪USERS OR user IN DEFAULT_USERS) | rename target_user as user | chart count() as
↪Event by user, source_address | search Event>10
```

2.183 LP_HandleKatz Duplicating LSASS Handle

- **Trigger Condition:** HandleKatz tool directly opening LSASS process to duplicate its handle is detected.
- **ATT&CK Category:** Execution, Credential Access
- **ATT&CK Tag:** LSASS Memory, Native API
- **ATT&CK ID:** T1003.001, T1106
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=10 access="0x1440" "image"="*\lsass.exe" call_
↪ trace="C:\Windows\System32\ntdll.dll+*" call_trace="*|UNKNOWN(*" call_trace="*")"
```

2.184 LP_PowerShell Execution Policy Modification Detected

- **Trigger Condition:** Registry value for the PowerShell execution policy is changed.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** PowerShell, Modify Registry
- **ATT&CK ID:** T1059.001, T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Set label=Value target_object IN ["*\ShellIds\Microsoft.
↪ PowerShell\ExecutionPolicy*",
↪ "*\Policies\Microsoft\Windows\PowerShell\ExecutionPolicy*"] detail IN ["*Bypass*",
↪ "*RemoteSigned'", "*Unrestricted*"] - "process" IN ["C:\Windows\System32\*",
↪ "C:\Windows\SysWOW64\*"]
```

2.185 LP_Devtoolslauncher Executes Specified Binary

- **Trigger Condition:** Usage of devtoolslauncher to execute other binaries. Adversaries attempt to bypass process or signature-based defences by proxying the execution of malicious content with signed binaries using devtoolslauncher and LaunchForDeploy commands.

- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** System Binary Proxy Execution
- **ATT&CK ID:** T1218
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\devtoolslauncher.exe" command=
↳ "*LaunchForDeploy*" -user IN EXCLUDED_USERS
```

2.186 LP_DHCP Callout DLL Installation Detected

- **Trigger Condition:** Installation of a *Callout DLL* via *CalloutDlls* and *CalloutEnabled* parameters in the registry, used to execute code in the context of the DHCP server is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hijack Execution Flow, DLL Side-Loading, Modify Registry
- **ATT&CK ID:** T1574, T1574.002, T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object IN [
↳ "*\Services\DHCPServer\Parameters\CalloutDlls",
↳ "*\Services\DHCPServer\Parameters\CalloutEnabled"] -user IN EXCLUDED_USERS
```

2.187 LP_DHCP Server Error Failed Loading the CallOut DLL

- **Trigger Condition:** DHCP server error in which a specified Callout DLL in registry cannot be loaded.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hijack Execution Flow, DLL Side-Loading
- **ATT&CK ID:** T1574, T1574.002

- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WinServer event_id IN ["1031", "1032", "1034"] event_source="Microsoft-  
↪ Windows-DHCP-Server" -user IN EXCLUDED_USERS
```

2.188 LP_DHCP Server Loaded the CallOut DLL

- **Trigger Condition:** Specified Callout DLL in the registry loaded by the DHCP server. Adversaries attempt to run their specified DLL through the DHCP server to achieve their objectives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** DLL Side-Loading
- **ATT&CK ID:** T1574.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=1033 event_source="Microsoft-Windows-DHCP-Server" -  
↪ user IN EXCLUDED_USERS
```

2.189 LP_Direct Autorun Keys Modification Detected

- **Trigger Condition:** A modification to the direct autorun keys on a system (ASEP) in the registry using `reg.exe` is detected. These keys are used to run programs or scripts automatically when a specific event occurs, such as when the system starts up or when a user logs in. Adversaries may use this technique to establish persistence on a system and ensure that their malware or other malicious programs are launched automatically whenever the system is restarted. They may also use it to evade detection by disguising their malware as a legitimate program automatically launched by the system. This alert requires registry auditing to be enabled. When an admin user modifies the keys, false positive alerts may be triggered.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Registry Run Keys/Startup Folder
- **ATT&CK ID:** T1547.001

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\reg.exe" command="*add*"
↪ command IN ["*\software\Microsoft\Windows\CurrentVersion\Run*",
↪ " *\software\Microsoft\Windows NT\CurrentVersion\Winlogon\Userinit*",
↪ " *\software\Microsoft\Windows NT\CurrentVersion\Winlogon\Shell*",
↪ " *\software\Microsoft\Windows NT\CurrentVersion\Windows*",
↪ " *\software\Microsoft\Windows\CurrentVersion\Explorer\User Shell Folders*",
↪ " *\system\CurrentControlSet\Control\SafeBoot\AlternateShell*"]
```

2.190 LP_Disable of ETW Trace

- **Trigger Condition:** Usage of a command that clears or disables any Event Tracing for Windows (ETW) trace log. Adversaries can temporarily or permanently cease logging flow without generating any additional event-clear log entries from this tactic.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indicator Blocking, Indicator Removal
- **ATT&CK ID:** T1562.006, T1070
- **Minimum Log Source Requirement:** Windows Sysmon, Windows, PowerShell
- **Query:**

```
(label="Process" label=Create ((command="*cl*" command="*/Trace*") OR (command=
↪ " *clear-log*" command="*/Trace*") OR (command="*sl*" command="*/e:false*") OR
↪ (command="*set-log*" command="*/e:false*") OR (command="*logman*" command=
↪ " *update*" command="*trace*" command="*-p*" command="*-ets*") OR command=
↪ " *Remove-EtwTraceProvider*" OR (command="*Set-EtwTraceProvider*" command=
↪ " *0x11*")) ) OR (norm_id=WinServer event_id=4104 (script_block="*Remove-
↪ EtwTraceProvider *" OR (script_block="*Set-EtwTraceProvider *" script_block="*0x11*
↪ ))) )
```

2.191 LP_MiniNt Registry Key Addition

- **Trigger Condition:** The addition of a key *MiniNt* to the registry is detected. Windows Event Log service will stop the write events after reboot.
- **ATT&CK Category:** Defense Evasion

- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label=Registry label=Set label=Value target_object=
↪ "HKLM\SYSTEM\CurrentControlSet\Control\MiniNt" -user IN EXCLUDED_USERS
```

2.192 LP_Execution of Base64 Encoded Command Using IEX

- **Trigger Condition:** Usage of the Invoke-Expression (IEX) cmdlet to execute encoded PowerShell commands. IEX is a built-in cmdlet in PowerShell that allows users to run scripts or commands stored in a string. Encoding a script can conceal its contents, and adversaries can use the IEX cmdlet to execute the encoded PowerShell commands to evade detection.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows, PowerShell
- **Query:**

```
label="Process" label=Create command IN ["*SUVYIChb*", "*IFWCAoW*", "*JRVggKF*",
↪ "*aWV4IChb*", "*IleCAoW*", "*pZXggKF*", "*aWV4IChOZXcn*", "*IleCAoTmV3J*",
↪ "*pZXggKE5ldy*", "*SUVYIChOZX*", "*IFWCAoTmV3*", "*JRVggKE5ld*", "*SUVYKF*",
↪ "*IFWChb*", "*JRVgoW*", "*aWV4KF*", "*IleChb*", "*pZXgoW*", "*aWV4KE5ld*",
↪ "*IleChOZX*", "*pZXgoTmV3*", "*SUVYKE5ld*", "*IFWChOZX*", "*JRVgoTmV3*",
↪ "*SUVYKCgn*", "*IFWCgoJ*", "*JRVgoKC*", "*aWV4KCgn*", "*IleCgoJ*", "*pZXgoKC*",
↪ "] command IN ["*SQBFAFgAIAAoAFsA*", "*kARQBYACAAKABbA*",
↪ "*JAEUAWAAgACgAWw*", "*aQBlAHgAIAAoAFsA*", "*kAZQB4ACAAKABbA*",
↪ "*pAGUAeAAgACgAWw*", "*aQBlAHgAIAAoAE4AZQB3A*",
↪ "*kAZQB4ACAAKABOAGUAdw*", "*pAGUAeAAgACgATgBlAHcA*",
↪ "*SQBFAFgAIAAoAE4AZQB3A*", "*kARQBYACAAKABOAGUAdw*",
↪ "*JAEUAWAAgACgATgBlAHcA*"]
```

2.193 LP_Discovery via PowerSploit Recon Module

- **Trigger Condition:** Execution of Powersploit Recon modules. Adversaries can leverage this module for reconnaissance activities like gathering information about a target network. Script Block Logging needs to be enabled for this alert to work.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id="WinServer" event_source="Microsoft-Windows-PowerShell" event_id=4104
↪script_block IN POWERSPLOIT_RECON_MODULES
```

2.194 LP_DLL Load via LSASS Detected

- **Trigger Condition:** A DLL loaded through an undocumented Registry key via the LSASS process.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Boot or Logon Autostart Execution, LSASS Driver
- **ATT&CK ID:** T1547, T1547.008
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id IN ["12", "13"] target_object IN [
↪"*\\CurrentControlSet\\Services\\NTDS\\DirectoryServiceExtPt*",
↪"*\\CurrentControlSet\\Services\\NTDS\\LsaDbExtPt*" ] - ("process" =
↪"C:\\Windows\\system32\\lsass.exe" detail IN ["%%systemroot%%\\system32\\ntdsa.dll", "%
↪%systemroot%%\\system32\\lsadb.dll"])
```

2.195 LP_DNS Server Error Failed Loading the ServerLevelPluginDLL

- **Trigger Condition:** Application Layer Protocol and DNS server error where a specified plugin DLL in the registry cannot be loaded.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hijack Execution Flow, DLL Side-Loading
- **ATT&CK ID:** T1574, T1574.002
- **Minimum Log Source Requirement:** DNS Server
- **Query:**

```
event_source="DNS Server" event_id IN ["150", "770"]
```

2.196 LP_DNS ServerLevelPluginDll Install

- **Trigger Condition:** Installation of a plugin DLL via the ServerLevelPluginDll parameter in the registry used to execute code in the Application Layer Protocol and DNS server.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry, DLL Side-Loading
- **ATT&CK ID:** T1112, T1574.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=13 target_object=
↪ "*"\\services\\DNS\\Parameters\\ServerLevelPluginDll") OR (event_id=1 command=
↪ "dnscmd.exe /config /serverlevelpluginDll *" ) -user IN EXCLUDED_USERS
```

2.197 LP_Domain Trust Discovery Detected

- **Trigger Condition:** Adversaries attempt to gather information on domain trust relationships is detected. Domain trust is a relationship between two domains that allows users in one domain to be authenticated in the other domain. It enables

users to access resources in a trusted domain as if they were local. Adversaries may attempt to establish domain trusts to access additional resources or move laterally within an organization's network. They may also use domain trusts to hide their activities or to evade detection.

- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Domain Trust Discovery
- **ATT&CK ID:** T1482
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create(("process"="*\dsquery.exe" command="*-filter*"
↪command="*trustedDomain*") OR ("process"="*\nltest.exe" command="*domain_
↪trusts*")) -user IN EXCLUDED_USERS
```

2.198 LP_dotNET DLL Loaded Via Office Applications

- **Trigger Condition:** Assembly of DLL loaded by the Office Product.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Malicious File
- **ATT&CK ID:** T1204.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process" IN ["*\excel.exe", "*\mspub.exe",
↪ "*\onenote.exe", "*\onenoteim.exe", "*\outlook.exe", "*\powerpnt.exe", "*\winword.
↪exe"] image="*C:\Windows\assembly\*"
```

2.199 LP_DPAPI Domain Backup Key Extraction Detected

- **Trigger Condition:** Tools extracting the LSA secret DPAPI domain backup key from domain controllers.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSA Secrets

- **ATT&CK ID:** T1003.004
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
(norm_id=WinServer event_id=4662 object_type="SecretObject" access="0x2" object_
↪ name="*BCKUPKEY*")
```

2.200 LP_DPAPI Domain Master Key Backup Attempt

- **Trigger Condition:** An attempt to backup Data Protection API (DPAPI) master key is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSA Secrets
- **ATT&CK ID:** T1003.004
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4692 -user IN EXCLUDED_USERS
```

2.201 LP_Dridex Process Pattern Detected

- **Trigger Condition:** A typical dridex process patterns are detected.
- **ATT&CK Category:** Defense Evasion, Privilege , Discovery
- **ATT&CK Tag:** Process Injection, System Owner/User Discovery, Network Share Discovery
- **ATT&CK ID:** T1055, T1033, T1135
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ( ("process"="*\svchost.exe" command="*C:\Users\*"
↪ command="*\Desktop\*" -parent_process="C:\Windows\System32\*" ) OR (parent_
↪ process="*\excel.exe" "process"="*\regsvr32.exe" command IN ["*-s *",
↪ ".*\AppData\Local\Temp\*" ] -command="*.dll*") OR (parent_process="*\svchost.exe" ((
↪ "process"="*\whoami.exe" command="*/all*") OR ("process" IN ["*\net.exe", ".*\net1.
↪ exe"] command="* view*")) ) -user IN EXCLUDED_USERS
```

2.202 LP_Droppers Exploiting CVE-2017-11882 Detected

- **Trigger Condition:** The exploitation using CVE-2017-11882 to start EQNEDT32.EXE and other sub-processes like mshta.exe are detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Exploitation for Defense Evasion
- **ATT&CK ID:** T1211
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 parent_image="*\EQNEDT32.EXE" -user IN
↪ EXCLUDED_USERS
```

2.203 LP_Drupal Arbitrary Code Execution Detected

- **Trigger Condition:** The exploitation of arbitrary code execution vulnerability (CVE-2018-7600) in Drupal, is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver
- **Query:**

```
norm_id=* label=Access request_method=POST resource='*ajax_form*drupal*ajax*'
```

2.204 LP_Elevated Command Prompt Activity by Non-Admin User Detected

- **Trigger Condition:** Execution of an elevated command prompt by a non-admin user. Adversaries use this technique to execute commands or scripts that require a higher privilege than the regular users.
- **ATT&CK Category:** Execution

- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4688 -user IN ADMINS "process"="*cmd.exe" token_
↪elevation_type="*(2)*" -user IN EXCLUDED_USERS
```

2.205 LP_EMC Possible Ransomware Detection

- **Trigger Condition:** Suspicious data activity affecting more than 200 files or in-house baseline is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Data Encrypted for Impact, Data Destruction, Proxy
- **ATT&CK ID:** T1486, T1485, T1090
- **Minimum Log Source Requirement:** EMC
- **Query:**

```
label=EMC - "bytesWritten"="0" - "bytesWritten"="0x0" event="0x80" flag=0x2?
↪userSid=* | chart count() as handle by userSid, clientIP | search handle>200
```

2.206 LP_Empire PowerShell Launch Parameters

- **Trigger Condition:** Suspicious PowerShell command line parameters used in Empire are detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*-NoP -sta -Nonl -W Hidden -Enc *", "* -
↳noP -sta -w 1 -enc *", "*-NoP -Nonl -W Hidden -enc *", "* -enc SQB*", "*-nop -exec?
↳bypass -EncodedCommand*"] -user IN EXCLUDED_USERS
```

2.207 LP_Empire PowerShell UAC Bypass Detected

- **Trigger Condition:** Empire Command and Scripting Interpreter and PowerShell UAC bypass methods are detected.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Access Control
- **ATT&CK ID:** T1548
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 command IN ["*-NoP -Nonl -w Hidden -c x=((gp?
↳HKCU:Software\Microsoft\Windows Update).Update)*", "*-NoP -Nonl -c x=((gp?
↳HKCU:Software\Microsoft\Windows Update).Update)*"] -user IN EXCLUDED_USERS
```

2.208 LP_Enabled User Right in AD to Control User Objects

- **Trigger Condition:** Logpoint detects a scenario where if a user is assigned the *SeEnableDelegation Privilege* right in Active Directory, they will be allowed to control other Active Directory user's objects.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** Valid Accounts
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4704 message="*SeEnableDelegationPrivilege*" -user IN?
↳EXCLUDED_USERS
```

2.209 LP_PowerShell Encoded FromBase64String Detected

- **Trigger Condition:** The .NET method *FromBase64String* decodes a Base64-encoded string is detected. Base64 is a widely used encoding scheme representing binary data in an ASCII string format.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell, Deobfuscate/Decode Files or Information
- **ATT&CK ID:** T1059, T1059.001, T1140
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create command IN [
  ↳ "*OgA6AEYAcgBvAG0AQgBhAHMAZQA2ADQAUwB0AHIAaQBuAGcA*",
  ↳ "*oAOgBGAHIAbwBtAEIAYQBzAGUANgA0AFMAAdABYAGkAbgBnA*",
  ↳ "*6ADoARgByAG8AbQBCAGEAcwBIADYANABTAHQAcgBpAG4AZw*" ]
```

2.210 LP_Encoded PowerShell Command Detected

- **Trigger Condition:** Execution of encoded Command and Scripting Interpreter and PowerShell commands are detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\powershell.exe" command IN ["*-e *", "*-
  ↳ enc *", "*-ec *", "*-en *", "*-enco *"] -command="* -Encoding * -{"parent_process
  ↳ "= "C:\Packages\Plugins\Microsoft.GuestConfiguration.ConfigurationforWindows\*"
  ↳ parent_process="*\gc_worker.exe")
```

2.211 LP_Eventlog Cleared Detected

- **Trigger Condition:** One of the Windows Event logs been cleared is detected. Adversaries can use this technique to remove the traces of intrusion.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Clear Windows Event Logs
- **ATT&CK ID:** T1070.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=104 event_source="Microsoft-Windows-Eventlog" -user IN EXCLUDED_USERS
```

2.212 LP_Executables Stored in OneDrive

- **Trigger Condition:** A user stores files that are executable in OneDrive.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Office365
- **Query:**

```
event_source=OneDrive source_file_extension IN EXECUTABLES | chart count() by user_id, source_address, source_file, source_file_extension, source_relative_url
```

2.213 LP_Execution in Non-Executable Folder Detected

- **Trigger Condition:** Process creation from an uncommon directory is detected. Adversaries may drop and execute payloads from such Windows locations to evade detection and gain persistence.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading

- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN SUSPICIOUS_FOLDER_EXE_EXECUTION - "process"
↪ "*" \servicing\TrustedInstaller.exe "
```

2.214 LP_Execution in Outlook Temp Folder Detected

- **Trigger Condition:** Execution of a suspicious program in the Outlook's temp folder is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Attachment
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" "*" \Temporary Internet Files\Content.Outlook\*" -
↪ user IN EXCLUDED_USERS
```

2.215 LP_Execution in Webserver Root Folder Detected

- **Trigger Condition:** A suspicious program execution in a web service root folder (filter out false positives) is detected. Attackers use this common tactic to achieve persistence in web servers by placing their malicious files in the web service root directory. False positives could be various applications and tools, including ping or nslookup command invocations.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Server Software Component, Web Shell
- **ATT&CK ID:** T1505, T1505.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN ["*\\wwwroot\\*", "*\\wmpub\\*", "*\\htdocs\\*"] -
↪ "process" IN ["*\\bin\\*", "*\\Tools\\*", "*\\SMSComponent\\*"] parent_process="*\\services.
↪ exe" -user IN EXCLUDED_USERS
```

2.216 LP_Execution of Renamed PaExec Detected

- **Trigger Condition:** Execution of renamed paexec via imphash and executable product string.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 product IN ["*PAExec*"] hash_imphash IN [
↪ "11D40A7B7876288F919AB819CC2D9802", "6444f8a34e99b8f7d9647de66aabe516",
↪ "dfd6aa3f7b2b1035b76b718f1ddc689f", "1a6cca4d5460b1710a12dea39e4a592c"] -
↪ image="*paexec*" -user IN EXCLUDED_USERS
```

2.217 LP_Execution via Control Panel Items

- **Trigger Condition:** Execution of binary via Signed Binary Proxy Execution, Control Panel items.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Control Panel
- **ATT&CK ID:** T1218.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\\control.exe" command="*control*"
↪ command="*cp|*"
```

2.218 LP_Execution via HTA using IE JavaScript Engine Detected

- **Trigger Condition:** Execution of an HTA (HTML Application) file using the Internet Explorer JavaScript engine. HTAs are standalone applications written in HTML and can execute scripts, such as JavaScript or VBScript, on a system. Adversaries may use HTAs as a delivery mechanism for their payloads or execute arbitrary code on a system. Adversaries may use HTAs as a way to bypass security controls or to evade detection. They may also use them to execute arbitrary code on a system, potentially allowing them to access sensitive information or compromise the system.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Mshta
- **ATT&CK ID:** T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process"="*mshta.exe" image="*jscript9.dll"
```

2.219 LP_Suspicious Fsutil Invocation

- **Trigger Condition:** Execution of Fsutil with Createjournal, Deletejournal or setZeroData command-line argument. Fsutil is a command-line utility that allows users to perform various file system tasks, such as creating hard links, managing reparse points, and dismounting volumes. Adversaries can use Fsutil to remove the traces of changes made in the file system by tampering with or deleting the journal. They can also use it to monitor file system activities by creating a journal.
- **ATT&CK Category:** Defense Evasion, Impact
- **ATT&CK Tag:** Indicator Removal, Data Destruction
- **ATT&CK ID:** T1070, T1485
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\fsutil.exe" OR file="fsutil.exe") command IN [
↪ "*deletejournal*", "*createjournal*", "*setZeroData*"] -user IN EXCLUDED_USERS
```

2.220 LP_High Number of Process Termination

- **Trigger Condition:** When more than ten processes are terminated. In Microsoft Windows, processes can be terminated using task kill, service stop, and service delete. Adversaries can use this technique to kill, stop, or delete services or processes that could prevent payload execution.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Service Stop
- **ATT&CK ID:** T1489
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (((("process"="*\taskkill.exe" OR file="taskkill.exe")
↪ command="*/f*" command IN ["*/pid*", "*/im*", "*/t*"]) OR ("process" IN ["*\sc.exe
↪ ", ".*\net.exe", ".*\net1.exe"] command IN ["*delete*", "*disabled*", "*pause*", "*stop*
↪ "])) | chart count() as occurrence by user, host, domain, "process", parent_process |
↪ search occurrence > 10
```

2.221 LP_Execution via Windows Scripting Host Component Detected

- **Trigger Condition:** Execution of a script using a system's Windows Scripting Host (WSH) component. WSH is a Microsoft technology that allows users to run scripts and automate tasks on Windows systems. Adversaries may use WSH to execute their payloads or automate their activities in a system. Adversaries may use the WSH component to execute arbitrary code on a system, potentially allowing them to access sensitive information or compromise the system. They may also use it to hide their activities' true nature or evade detection.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows Sysmon

- **Query:**

```
norm_id=WindowsSysmon event_id=7 image in ["*wshom.ocs", "*scrrun.dll", "*vbscript.dll"]
```

2.222 LP_Exim MTA Remote Code Execution Vulnerability Detected

- **Trigger Condition:** Remote code execution vulnerability in Exim MTA is detected. The U.S. National Security Agency (NSA) reported that Russian military cyber actors, also known as Sandworm Team, have been actively exploiting a critical vulnerability in Exim MTA since August 2019.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning, Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1046, T1518, T1518.001
- **Minimum Log Source Requirement:** Vulnerability Management
- **Query:**

```
norm_id=VulnerabilityManagement cve_id="*CVE-2019-10149"
```

2.223 LP_Exim Remote Command Execution Detected

- **Trigger Condition:** Remote command execution in Exim is detected (CVE-2019-10149 is detected).
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Exploitation for Client Execution
- **ATT&CK ID:** T1203
- **Minimum Log Source Requirement:** Mail Server
- **Query:**

```
norm_id=* receiver="*${run}"
```

2.224 LP_Existing Service Modification Detected

- **Trigger Condition:** A modification of an existing service via the sc.exe system utility is detected. Adversaries abuses the Windows Service Control Manager to execute malicious commands or payloads without creating new services.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Create or Modify System Process, Windows Service
- **ATT&CK ID:** T1543, T1543.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" "process" IN ["*sc.exe", "*powershell.exe", "*cmd.exe"]  
↪ command="*sc*" command="*config*" command="*binpath*" -user IN EXCLUDED_  
↪ USERS
```

2.225 LP_External Disk Drive or USB Storage Device Detected

- **Trigger Condition:** External disk drives or plugged in USB devices are detected.
- **ATT&CK Category:** Lateral Movement, Initial Access
- **ATT&CK Tag:** Replication Through Removable Media, Hardware Additions
- **ATT&CK ID:** T1091, T1200
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer ((event_id IN ["6416"] class="DiskDrive") OR message="USB Mass  
↪ Storage Device") -user IN EXCLUDED_USERS
```

2.226 LP_Fail2ban IP Banned

- **Trigger Condition:** A client's IP address is banned after exceeding the limit for failed authentications.
- **ATT&CK Category:** Credential Access, Persistence

- **ATT&CK Tag:** Brute Force, Valid Accounts, Account Manipulation
- **ATT&CK ID:** T1110, T1078, T1098
- **Minimum Log Source Requirement:** Fail2ban
- **Query:**

```
norm_id=Fail2ban label=IP label=Block | process geoip(source_address) as country
```

2.227 LP_File Creation by PowerShell Detected

- **Trigger Condition:** Creation of a new file using PowerShell on a system. Adversaries may use PowerShell to create new files, as a way to drop and execute malicious payloads, or to store data for later retrieval.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 file=* "process"="*powershell.exe" -file IN ["__
↪ PSScriptPolicyTest_*. ", "PowerShell_transcript.*", "powershell.exe.log",
↪ "StartupProfileData*", "ModuleAnalysisCache"] -file IN ["*.mui"]
```

2.228 LP_File Deletion Detected

- **Trigger Condition:** Adversaries delete files to erase the traces of the intrusion.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indicator Removal on Host, File Deletion
- **ATT&CK ID:** T1070, T1070.004
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 (command="*remove-item*" or command=
↳ "*vssadmin*Delete Shadows /All /Q*" or command="*wmic*shadowcopy delete*" or
↳ command="*wbadmin* delete catalog -q*" or command="*bcdedit*bootstatuspolicy
↳ ignoreallfailures*" or command="*bcdedit*recoveryenabled no*") -user IN EXCLUDED_
↳ USERS
```

2.229 LP_File or Folder Permissions Modifications

- **Trigger Condition:** Modifications to file or folder permissions are detected. Permissions control access to files and directories and determine which users and processes can read, write, or execute them. Adversaries may attempt to modify these permissions to gain unauthorized access to sensitive files or to execute arbitrary code on a system.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Windows File and Directory Permissions Modification
- **ATT&CK ID:** T1222.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (("process" IN ["*\cacs.exe", "*/icacs.exe", "*/net.exe",
↳ "*/net1.exe"] command IN ["*/grant*", "*/setowner*", "*/inheritance:r*"]) OR ("process
↳ " = "*/attrib.exe" command="*-r*") OR "process"="*/takeown.exe") -(command=
↳ "*/ICACLS C:\ProgramData\dynatrace\gateway\config\connectivity.history /reset" OR
↳ (command="*/ICACLS C:\ProgramData\dynatrace\gateway\config\config.properties /
↳ grant :r *" command="*/S-1-5-19:F*")OR (command=
↳ "*/AppData\Local\Programs\Microsoft VS Code*" OR parent_process="*/Microsoft VS
↳ Code\Code.exe")) -user IN EXCLUDED_USERS
```

2.230 LP_File System Permissions Weakness

- **Trigger Condition:** A weakness in the file system permissions on a system is detected. File system permissions control access to files and directories and determine which users and processes can read, write, or execute them. Adversaries may exploit weaknesses in file system permissions to gain unauthorized access to sensitive files or execute arbitrary code on a system.
- **ATT&CK Category:** Persistence, Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Hijack Execution Flow, Services File Permissions Weakness

- **ATT&CK ID:** T1574,T1574.010
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 (image="*\Temp\*" or image="*C:\Users\*" or
↪ status!="*Valid*") -user IN EXCLUDED_USERS
```

2.231 LP_Firewall Disabled via Netsh Detected

- **Trigger Condition:** *netsh* command turns off the Windows firewall is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Disable or Modify System Firewall
- **ATT&CK ID:** T1562.004
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=Create "process"="*\netsh.exe" command="*set*" command=
↪ "*firewall*" ((command="*opmode*" command="*disable*") OR (command="*state*"
↪ command="*off*"))
```

2.232 LP_First Time Seen Remote Named Pipe

- **Trigger Condition:** The alert rule excludes the named pipes accessible remotely and notifies on new cases. Also, it helps to detect lateral movement and remote execution using named pipes.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services
- **ATT&CK ID:** T1021
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 share_name="IPC$" -relative_target IN ["atsvc", "samr", "lsarpc", "winreg", "netlogon", "srvsvc", "protected_storage", "wkssvc", "browser", "netdfs", "svcctl", "spoolss", "ntsvcs", "LSM_API_service", "HydraLsPipe", "TermSrv_API_service", "MsFteWds"] -user IN EXCLUDED_USERS
```

2.233 LP_FirstClass Failed Login Attempt

- **Trigger Condition:** A user or a gateway attempts to log in with an incorrect password.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Exploitation for Credential Access, Exploitation for Privilege Escalation, Brute Force
- **ATT&CK ID:** T1212, T1068, T1110
- **Minimum Log Source Requirement:** Firstclass
- **Query:**

```
norm_id=FirstClass label=Login label=Fail
```

2.234 LP_FirstClass Failed Password Change Attempt

- **Trigger Condition:** A user fails to change their password.
- **ATT&CK Category:** Credential Access, Persistence
- **ATT&CK Tag:** Account Manipulation, Exploitation for Credential Access, Exploitation for Privilege Escalation
- **ATT&CK ID:** T1098, T1212, T1068
- **Minimum Log Source Requirement:** Firstclass
- **Query:**

```
norm_id=FirstClass label=Password label=Change label=Fail
```

2.235 LP_Formbook Process Creation Detected

- **Trigger Condition:** Formbook like process executions injecting code into a set of files in the System32 folder, which executes a unique command line to delete the dropper from the AppData Temp folder is detected.
- **ATT&CK Category:** Resource Development
- **ATT&CK Tag:** Malware
- **ATT&CK ID:** T1587.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process IN ["*:\Windows\System32\*.exe",
↪ "*:\Windows\SysWOW64\*.exe"] (command="*c*" command="*:\Users\*" ((command=
↪ "*del*" command in ["*\AppData\Local\Temp\*", "*\Desktop\*"])) OR (command=
↪ "*type nul >*" command="*\Desktop\*")) command="*.exe"
```

2.236 LP_FortiGate Admin Login Disable

- **Trigger Condition:** The administrator login is disabled in the system.
- **ATT&CK Category:** Impact, Credential Access, Persistence
- **ATT&CK Tag:** Account Access Removal, Account Manipulation
- **ATT&CK ID:** T1531, T1098
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=event sub_category=system message_id=32021 user=*
```

2.237 LP_FortiGate Anomaly

- **Trigger Condition:** An anomaly in the system is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning

- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=anomaly sub_category=anomaly log_level=alert attack=*[?]
↪ | process geoip(source_address) as source_country | process geoip(destination_address)[?]
↪ as destination_country
```

2.238 LP_FortiGate Antivirus Botnet Warning

- **Trigger Condition:** A botnet warning from antivirus is detected.
- **ATT&CK Category:** Command and Control, Impact
- **ATT&CK Tag:** Proxy, Network Denial of Service
- **ATT&CK ID:** T1090, T1498
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* (event_category=av OR event_category=antivirus) sub_category=botnet[?]
↪ message_id=9248 | process geoip(source_address) as source_country | process[?]
↪ geoip(destination_address) as destination_country
```

2.239 LP_FortiGate Antivirus Scan Engine Load Failed

- **Trigger Condition:** Antivirus Scan Engine Load Failure is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=av sub_category=scanerror message_id=8974 | process[?]
↪ geoip(source_address) as source_location | process geoip(destination_address) as[?]
↪ destination_location
```

2.240 LP_FortiGate Attack

- **Trigger Condition:** An attack in the system is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Network Denial of Service
- **ATT&CK ID:** T1498
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* attack=* | process geoip(source_address) as source_country | process
↳ geoip(destination_address) as destination_country
```

2.241 LP_FortiGate Critical Events

- **Trigger Condition:** Critical events in the system are detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=event sub_category=system log_level=critical
```

2.242 LP_FortiGate Data Leak Protection

- **Trigger Condition:** An attempt to data leak is detected.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Automated Exfiltration
- **ATT&CK ID:** T1020
- **Minimum Log Source Requirement:** Fortigate

- **Query:**

```
norm_id=Forti* event_category=utm sub_category=dlp file=* | process geoip(source_
↪address) as source_country | process geoip(destination_address) as destination_country
```

2.243 LP_FortiGate IPS Events

- **Trigger Condition:** An intrusion attempt is detected in the system.
- **ATT&CK Category:** Discovery, Defense Evasion
- **ATT&CK Tag:** Network Service Scanning, Exploitation for Defense Evasion
- **ATT&CK ID:** T1046, T1211
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=utm sub_category=ips user=* | process geoip(source_
↪address) as source_country | process geoip(destination_address) as destination_country
```

2.244 LP_FortiGate Malicious URL Attack

- **Trigger Condition:** A malicious attack in a system is detected. This alert rule is valid only for FortiOS V6.0.4.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Link
- **ATT&CK ID:** T1566, T1566.002
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=ips sub_category="malicious-url" message_id=16399 [?]
↪process geoip(source_address) as source_country | process geoip(destination_address)[?]
↪as destination_country
```

2.245 LP_FortiGate Virus

- **Trigger Condition:** A virus attack is detected.
- **ATT&CK Category:** Discovery, Defense Evasion
- **ATT&CK Tag:** Network Service Scanning, Exploitation for Defense Evasion
- **ATT&CK ID:** T1046, T1211
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=utm sub_category=virus | process geoip(source_address) as ?
↪ source_country | process geoip(destination_address) as destination_country
```

2.246 LP_FortiGate VPN SSL User Login Failed

- **Trigger Condition:** A VPN SSL login failure is detected.
- **ATT&CK Category:** Initial Access, Credential Access
- **ATT&CK Tag:** Valid Accounts, Brute Force
- **ATT&CK ID:** T1078, T1110
- **Minimum Log Source Requirement:** Fortigate
- **Query:**

```
norm_id=Forti* event_category=event sub_category=vpn message_id=39426 user=*
```

2.247 LP_FSecure File Infection

- **Trigger Condition:** An infected file is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning, File and Directory Discovery
- **ATT&CK ID:** T1046, T1083
- **Minimum Log Source Requirement:** Fsecure Gatekeeper

- **Query:**

```
norm_id=FSecureGatekeeper label=Infection label=File label=Attack
```

2.248 LP_FSecure Virus Detection

- **Trigger Condition:** Virus alert is detected while scanning.
- **ATT&CK Category:** Discovery, Defense Evasion
- **ATT&CK Tag:** Network Service Scanning, Exploitation for Defense Evasion
- **ATT&CK ID:** T1046, T1211
- **Minimum Log Source Requirement:** Fsecure
- **Query:**

```
norm_id=FSecure* label=Detect label=Malware malware=*
```

2.249 LP_GAC DLL Loaded Via Office Applications Detected

- **Trigger Condition:** GAC DLL loaded by an Office Product is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Attachment
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process" IN ["*\winword.exe*", "*\powerpnt.exe*",
↪ "\excel.exe*", "*\outlook.exe*"] image IN ["*C:\Windows\Microsoft.
↪ NET\assembly\GAC_MSIL*"] -user IN EXCLUDED_USERS
```

2.250 LP_Generic Password Dumper Activity on LSASS Detected

- **Trigger Condition:** Process handle on LSASS process with access mask is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer (event_id=4656 OR event_id="4663") object_name="*\lsass.exe" access_
↪mask IN ["*0x40*", "*0x1400*", "*0x1000*", "*0x100000*", "*0x1410*", "*0x1010*", "*0x1438*",
↪", "*0x143a*", "*0x1418*", "*0x1ffff*", "*0x1f1fff*", "*0x1f2fff*", "*0x1f3fff*"] -user IN[
↪EXCLUDED_USERS
```

2.251 LP_Grabbing Sensitive Hives via Reg Utility

- **Trigger Condition:** Sensitive Windows hives like SYSTEM, SAM or SECURITY accessed via Reg utility.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSA Secrets, Cached Domain Credentials, Credentials in Registry
- **ATT&CK ID:** T1003.004, T1003.005, T1552.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\reg.exe" command IN ["* save *", "* export *",
↪", "*ave *", "* eport *"] command IN ["*hklm*", "*hk\m*", "*hkey_local_machine*",
↪"*hkey_ocal_machine*", "*hkey_loca_machine*", "*hkey_ocal_machine*"]
↪command IN ["*\system*", "*\sam*", "*\security*", "*\ystem*", "*\sytem*",
↪"*\ytem*", "*\am*", "*\ecurity*"]
```

2.252 LP_Hacktool Ruler Detected

- **Trigger Condition:** Sensepost uses a Hacktool ruler.
- **ATT&CK Category:** Discovery, Execution
- **ATT&CK Tag:** Account Discovery, Use Alternate Authentication Material, Pass the Hash, Email Collection, Command-Line Interface + **ATT&CK ID:** T1087, T1550, T1550.002, T1114, T1059
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN ["4776", "4624", "4625"] workstation="RULER" -user IN EXCLUDED_USERS
```

2.253 LP_HH Execution Detected

- **Trigger Condition:** The *hh.exe* process running on a system is detected. *HH.exe* is a legitimate process associated with the Windows HTML Help feature and is used to display compiled help files (.chm) on a system. While the execution of *hh.exe* in itself is not necessarily malicious, an adversary may use this process as part of a more significant attack. For example, they may embed malicious code in a compiled help file and use *hh.exe* to execute it on a target system. False Positive Note: Legitimate applications or system processes may use *hh.exe* to display help files, which could trigger the alert. It is essential to carefully review and investigate any instances of this alert before taking action to ensure that the detected activity is genuinely malicious.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Compiled HTML File
- **ATT&CK ID:** T1218.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process" = "*\\hh.exe" OR file="hh.exe") command IN ["*.chm*", "*http*", "*.application*", "*\\AppData\\Local\\*", "*\\Content.Outlook\\*", "*\\Downloads\\*", "*\\Users\\Public\\*", "*\\Temp\\*"] -user IN EXCLUDED_USERS
```

2.254 LP_Hidden Files and Directories Detected

- **Trigger Condition:** When the presence of hidden files and directories on a system is detected. Adversaries may use hidden files and directories to conceal malicious files or activities from the victim. They may also use these files to store command and control information or to persist on a system after an initial compromise. By hiding their files and directories, adversaries can make it more difficult for defenders to detect and respond to their activities.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hide Artifacts, Hidden Files and Directories
- **ATT&CK ID:** T1564, T1564.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*attrib.exe" command IN ["*+h*", "*+s*"] -user IN EXCLUDED_USERS
```

2.255 LP_Hiding Files with Attrib Detected

- **Trigger Condition:** The use of *attrib.exe* to hide files from users is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hide Artifacts, Hidden Files and Directories
- **ATT&CK ID:** T1564, T1564.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Create label="Process" "process"="*\attrib.exe" command = "* +h *"-(command = "*\desktop.ini*" OR (parent_process = "*\cmd.exe" command = "*+R +H +S +A \*.cui*" parent_command = "*C:\WINDOWS\system32\*.bat*"))
```

2.256 LP_IIS Native-Code Module Command Line Installation

- **Trigger Condition:** Logpoint detects suspicious IIS native-code module installations via the command line.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Server Software Component, Web Shell
- **ATT&CK ID:** T1505, T1505.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 command IN ["*\APPCMD.EXE install module /
↪name:*"] -user IN EXCLUDED_USERS
```

2.257 LP_In-memory PowerShell Detected

- **Trigger Condition:** Loading of *System.Management.Automation.dll* by other processes than PowerShell is detected. Adversaries can use this technique to evade defenses by loading the DLL and executing Powershell commands without the need of executing *powershell.exe* binary.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Image label=load image IN ["*\System.Management.Automation.Dll", ".*\System.
↪Management.Automation.ni.Dll"] -"process" IN [ ".*\Altaro.SubAgent.exe", ".*\AppV_
↪Manage.exe", ".*\azureadconnect.exe", ".*\CcmExec.exe", ".*\configsyncrun.exe",
↪ ".*\choco.exe", ".*\ctxappvservice.exe", ".*\DVLS.Console.exe", ".*\edgetransport.exe",
↪ ".*\exsetup.exe", ".*\forefrontactivedirectoryconnector.exe", ".*\InstallUtil.exe",
↪ ".*\JenkinsOnDesktop.exe", ".*\Microsoft.EnterpriseManagement.ServiceManager.UI.
↪Console.exe", ".*\mmc.exe", ".*\mscorsvw.exe", ".*\msexchangedelivery.exe",
↪ ".*\msexchangefrontendtransport.exe", ".*\msexchangehmworker.exe",
↪ ".*\msexchangesubmission.exe", ".*\msiexec.exe", ".*\MsiExec.exe", ".*\noderunner.exe",
↪ ".*\NServiceBus.Host.exe", ".*\NServiceBus.Host32.exe", ".*\NServiceBus.Hosting.Azure.
↪HostProcess.exe", ".*\OuiGui.WPF.exe", ".*\powershell.exe", ".*\powershell_ise.exe",
↪ ".*\pwsh.exe", ".*\SCCMcliCtrWPF.exe", ".*\ScriptEditor.exe", ".*\ScriptRunner.exe",
↪ ".*\sdiaghost.exe", ".*\servermanager.exe", ".*\setup100.exe", ".*\ServiceHub.
↪VSDetectedHost.exe", ".*\SPCAFRClient.exe", ".*\SPCAF.SettingsEditor.exe", ".*\SQLPS.
↪exe", ".*\telemetryservice.exe", ".*\UMWorkerProcess.exe", ".*\w3wp.exe",
↪ ".*\wsmprovhost.exe", ".*\dsac.exe", ".*\RemoteFXvGPUDisablement.exe",
↪ ".*\runscripthelper.exe", ".*\SyncAppvPublishingServer.exe", ".*\winrshost.exe"
```

(continues on next page)

(continued from previous page)

2.258 LP_Indicator Blocking - Driver Unloaded

- **Trigger Condition:** Adversaries blocks indicators or events captured by sensors from being gathered and analyzed.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Indicator Blocking
- **ATT&CK ID:** T1562, T1562.006
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 (image="*fltmc.exe" or command="*fltmc*unload*
↪") -user IN EXCLUDED_USERS
```

2.259 LP_Indicator Blocking - Sysmon Registry Edited

- **Trigger Condition:** An indicator blocking via registry editing is detected. Adversaries might block indicators or events typically captured by sensors from being gathered and analyzed to evade detection.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Indicator Blocking
- **ATT&CK ID:** T1562, T1562.006
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id IN [12,13,14] target_object in [
↪ "*HKLM\System\CurrentControlSet\Services\SysmonDrv\*",
↪ "*HKLM\System\CurrentControlSet\Services\Sysmon\*",
↪ "*HKLM\System\CurrentControlSet\Services\Sysmon64\*" ] - "process" IN ["*\Sysmon64.
↪ exe", "*\Sysmon.exe"] -event_type=INFO -user IN EXCLUDED_USERS
```

2.260 LP_Install Root Certificate

- **Trigger Condition:** Undermine security controls by adversaries that warn users of untrusted activity or prevent the execution of untrusted programs detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Subvert Trust Controls, Install Root Certificate
- **ATT&CK ID:** T1553, T1553.004
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id IN ["12", "13", "14"] "process"!="*svchost.exe"
↪target_object IN ["*\SOFTWARE\Microsoft\EnterpriseCertificates\Root\Certificates\*",
↪"*\Microsoft\SystemCertificates\Root\Certificates\*"] -user IN EXCLUDED_USERS
```

2.261 LP_Suspicious InstallUtil Execution

- **Trigger Condition:** Manipulation of *InstallUtil* to execute proxy code via a trusted Windows utility. *InstallUtil* is a command-line utility that allows resource installation and uninstallation by executing specific installer components specified in .NET binaries. Adversaries typically utilize the most commonly found way to invoke the *InstallUtil* Uninstall method.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution, InstallUtil
- **ATT&CK ID:** T1218, T1218.004
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create ( "process"="*Microsoft.NET\Framework*" "process"=
↪"*\InstallUtil.exe" command="* /logfile=*" command="*/LogToConsole=false*")
```

2.262 LP_Invocation of Active Directory Diagnostic Tool Detected

- **Trigger Condition:** Execution of `ntdsutil.exe` used for various attacks against the OS Credential Dumping, NTDS database (OS Credential Dumping, NTDS.DIT) is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, NTDS
- **ATT&CK ID:** T1003, T1003.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
'label="Process" label=Create "process"="*\ntdsutil.exe" -user IN EXCLUDED_USERS'
```

2.263 LP_Java Running with Remote Debugging

- **Trigger Condition:** A JAVA process running with remote debugging allowing more than just localhost to connect, is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Exploitation for Client Execution
- **ATT&CK ID:** T1203
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=create label="process" command="*transport=dt_socket,address=*" command IN [
↪ "*jre1.*", "*jdk1.*"] -command IN ["*address=127.0.0.*", "*address=localhost*"]
```

2.264 LP_Judgement Panda Exfil Activity

- **Trigger Condition:** Russian group activity as described in Global Threat Report 2019 by CrowdStrike is detected.
- **ATT&CK Category:** Credential Access

- **ATT&CK Tag:** OS Credential Dumping, Unsecured Credentials, Credentials In Files
- **ATT&CK ID:** T1552, T1552.001, T1003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 ((image="*\xcopy.exe" command="*/S /E /C /Q /
↪ H *") OR (image="*\adexplorer.exe" command="*-snapshot * c:\users\*")) -user IN
↪ EXCLUDED_USERS
```

2.265 LP_JunOS Attack

- **Trigger Condition:** Logpoint detects an attack pattern.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Network Denial of Service, Endpoint Denial of Service
- **ATT&CK ID:** T1498, T1499
- **Minimum Log Source Requirement:** JunOS
- **Query:**

```
norm_id=JunOS (label=Application OR label=appddos OR threat=*dos*) label=Attack
↪ (label=Warning OR label=Successful)
```

2.266 LP_JunOS Authentication Failed

- **Trigger Condition:** Failure of an authentication.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts, Brute Force
- **ATT&CK ID:** T1078, T1110
- **Minimum Log Source Requirement:** JunOS
- **Query:**

```
norm_id=JunOS label=User (label=Authentication OR Login) label=Fail
```

2.267 LP_JunOS Policy Violation

- **Trigger Condition:** A policy violation is detected.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation, Credential Access
- **ATT&CK Tag:** Bypass User Access Control, Exploitation for Credential Access, Exploitation for Privilege Escalation
- **ATT&CK ID:** T1548, T1212, T1068
- **Minimum Log Source Requirement:** JunOS
- **Query:**

```
norm_id=JunOS label=Policy (label=Violation OR label=Error)
```

2.268 LP_JunOS Security Log Clear

- **Trigger Condition:** An administrator has cleared one or more audit logs.
- **ATT&CK Category:** Defense Evasion, Impact
- **ATT&CK Tag:** Indicator Removal on Host, Data Destruction, Indicator Removal on Host, File Deletion
- **ATT&CK ID:** T1070, T1485, T1070, T1070.004
- **Minimum Log Source Requirement:** JunOS
- **Query:**

```
norm_id=JunOS label=Log label=Clear
```

2.269 LP_Kaspersky Antivirus - Outbreak Detection

- **Trigger Condition:** This alert rule is triggered whenever a threat is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Software Discovery, Security Software Discovery

- **ATT&CK ID:** T1518, T1518.001
- **Minimum Log Source Requirement:** Kaspersky
- **Query:**

```
norm_id=KasperskyAntivirus event_type="*threat*detected" | rename wstrPar5 as virus |  
↪ chart distinct_count(win_name) as CNT by virus, event_type
```

2.270 LP_Kaspersky Antivirus - Update Fail

- **Trigger Condition:** Automatic updates are disabled, not all the components are updated, or there is a network error.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Kaspersky
- **Query:**

```
norm_id=KasperskyAntivirus (event_type="Automatic updates are disabled" OR event_  
↪ type="Not all components were updated" OR event_type="Network update error" OR  
↪ event_type="Error updating component"  
OR description="Error downloading update files" OR description="Update files are  
↪ corrupted") | rename event_type as reason, description as reason
```

2.271 LP_Kaspersky Antivirus Extremely Out of Date Event

- **Trigger Condition:** Outdated events are detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Indicator Blocking
- **ATT&CK ID:** T1562, T1562.006
- **Minimum Log Source Requirement:** Kaspersky
- **Query:**

```
norm_id=KasperskyAntivirus event_type="*extremely out of date*"
```

2.272 LP_Kaspersky Antivirus Outbreak Detection by Source

- **Trigger Condition:** More than one source is affected by the same virus.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1518, T1518.001
- **Minimum Log Source Requirement:** Kaspersky
- **Query:**

```
norm_id=KasperskyAntivirus "event_type"="Threats have been detected" | chart distinct_
↪count(win_name) as DC | search DC>1
```

2.273 LP_Kaspersky Antivirus Outbreak Detection by Virus

- **Trigger Condition:** More than ten viruses are detected in the system.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1518, T1518.001
- **Minimum Log Source Requirement:** Kaspersky
- **Query:**

```
norm_id=KasperskyAntivirus "event_type"="Threats have been detected" | chart distinct_
↪count(wstrPar5) as DC | search DC>10
```

2.274 LP_Kaspersky Antivirus Threat Affecting Multiple Host

- **Trigger Condition:** The same threat is detected in multiple hosts.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Indicator Blocking
- **ATT&CK ID:** T1562, T1562.006
- **Minimum Log Source Requirement:** Kaspersky
- **Query:**

```
norm_id=KasperskyAntivirus event_type="*threat*detected" | chart distinct_count(win_
↪ name) as HostCount by event_type | process quantile(HostCount) | chart count() by
↪ event_type, quantile, HostCount
```

2.275 LP_Kernel Firewall Connection Denied

- **Trigger Condition:** Ten firewall connections are denied from the same source to the same destination in a minute.
- **ATT&CK Category:** Impact, Command and Control
- **ATT&CK Tag:** Network Denial of Service, Endpoint Denial of Service, Proxy
- **ATT&CK ID:** T1498, T1499, T1090
- **Minimum Log Source Requirement:** Kernel
- **Query:**

```
[10 norm_id=Kernel label=Firewall label=Connection label=Deny having same source_
↪ address, destination_address within 1 minute]
```

2.276 LP_Koadic Execution Detected

- **Trigger Condition:** The use of command line parameters associated with the Koadic hack tool during process creation events in Windows systems is detected.
- **ATT&CK Category:** Execution

- **ATT&CK Tag:** - Windows Command Shell, Visual Basic, JavaScript
- **ATT&CK ID:** T1059.003, T1059.005, T1059.007
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\cmd.exe" command="*/q*/c*chcp*" -user?
↪ IN EXCLUDED_USERS
```

2.277 LP_Large ICMP Traffic

- **Trigger Condition:** ICMP datagrams with a size greater than 1024 bytes are received.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
((label=Receive label=Packet) or label=Illegal label=Receive label=Packet) (packet_length>
↪ 1024 or fragment_length>1024)
```

2.278 LP_Local Account Creation on Workstation Detected

- **Trigger Condition:** Creation of a local account on a domain workstation that is not Windows Domain Controller (DC).
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Create Account
- **ATT&CK ID:** T1136
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label=User label=Account label=Create -target_user="*$" target_
↪ user=* -host in WINDOWS_DC
```

2.279 LP_LockCrypt Ransomware

- **Trigger Condition:** LockCrypt ransomware encrypts a file.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Disk Wipe, Disk Content Wipe, Data Encrypted for Impact, Data Destruction
- **ATT&CK ID:** T1561, T1561.001, T1486, T1485
- **Minimum Log Source Requirement:** Integrity Scanner
- **Query:**

```
norm_id=IntegrityScanner label = File label="Rename" new_file=*.lock | norm on new_
↪ file <path:.*><:"\\"><EncryptedFileName:.*> | norm on file_path <:.*><:"\\">
↪ <OriginalFileName:.*> | rename hostname as host | chart count() by log_ts, host, path,
↪ OriginalFileName, EncryptedFileName order by count() desc limit 10
```

2.280 LP_Log Files Creation of Dot-Net-to-JS Detected

- **Trigger Condition:** Creation of log files of Dot-Net-to-JavaScript.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 path="*UsageLogs*" file in ["*cscript.exe.log",
↪ "*wscript.exe.log", "*wmic.exe.log", "*mshta.exe.log", "*svchost.exe.log", "*regsvr32.
↪ exe.log", "*rundll32.exe.log"] -user IN EXCLUDED_USERS
```

2.281 LP_LSASS Access from Non System Account Detected

- **Trigger Condition:** Potential Mimikatz-like tools accessing LSASS from non system account is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN ["4663", "4656"] object_type="Process" object_name=
↪ "*\\lsass.exe" -user="*$" -user IN EXCLUDED_USERS
```

2.282 LP_LSASS Memory Dump Detected

- **Trigger Condition:** Process access to *lsass.exe* with access rights *0x1ffff* is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=10 "image"="C:\\windows\\system32\\lsass.exe"
↪ access="0x1ffff" call_trace IN ["*dbghelp.dll*", "*dbgcore.dll*"] -user IN EXCLUDED_
↪ USERS
```

2.283 LP_LSASS Memory Dump File Creation

- **Trigger Condition:** LSASS memory dump creation using operating systems utilities is detected. *Procdump* uses process name in the output file if no name is specified.
- **ATT&CK Category:** Credential Access

- **ATT&CK Tag:** Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 file="*lsass*dmp" -user IN EXCLUDED_USERS
```

2.284 LP_LSSAS Memory Dump with MiniDumpWriteDump API Detected

- **Trigger Condition:** The use of *MiniDumpWrite Dump API* for dumping *lsass.exe* memory in a stealth way is detected. Tools like *ProcessHacker* and some attacker tradecraft use this API found in *dbghelp.dll* or *dbgcore.dll*. For example, *SilentTrynity C2 Framework* has a module that leverages this API to dump the contents of *Lsass.exe* and transfer it over the network back to the attacker's machine.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
(norm_id=WindowsSysmon event_id=7 image IN ["*\dbghelp.dll", "*\dbgcore.dll"]
↪ "process" IN ["*\msbuild.exe", "*\cmd.exe", "*\svchost.exe", "*\rundll32.exe",
↪ "*\powershell.exe", "*\word.exe", "*\excel.exe", "*\powerpnt.exe", "*\outlook.exe",
↪ "*\monitoringhost.exe", "*\wmic.exe", "*\msiexec.exe", "*\bash.exe", "*\wscript.exe",
↪ "*\cscript.exe", "*\mshta.exe", "*\regsvr32.exe", "*\schtasks.exe", "*\dnx.exe",
↪ "*\regsvcs.exe", "*\sc.exe", "*\scriptrunner.exe"] - "process" = "*Visual Studio*") OR
↪ (event_id=7 image IN ["*\dbghelp.dll", "*\dbgcore.dll"] Signed="FALSE" - "process" =
↪ "*Visual Studio*") -user IN EXCLUDED_USERS
```

2.285 LP_Macro file Creation Detected

- **Trigger Condition:** Creation of a macro file. Adversaries often use macro-enabled files to deliver malware, exploit vulnerabilities, or trick users into enabling malicious code.

- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, Visual Basic
- **ATT&CK ID:** T1059, T1059.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 file in ["*.docm", "*.pptm", "*.xlsm", "*.xlm", "*.dotm", "*.xltm", "*.potm", "*.ppsm", "*.sldm", "*.xlam", "*.xla", "*.vdm"]
```

2.286 LP_Malicious Base64 Encoded PowerShell Keywords in Command Lines Detected

- **Trigger Condition:** When base64 encoded strings are used in hidden malicious Command and Scripting Interpreter, PowerShell command lines. Adversaries hides their activities by encoding commands to bypass detection with this technique.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image="*\\powershell.exe" command IN ["*?
↳ hidden ", "*AGkAdABzAGEAZABtAGkAbgAgAC8AdABYAGEAbgBzAGYAZQByA*",
↳ "*aXRzYWRtaW4gL3RyYW5zZmVy*",
↳ "*IAaQB0AHMAYQBkAG0AaQBuACAALwB0AHIAyQB0AHMAZgBIAHIA*",
↳ "*JpdHNhZG1pbjAvdHJhbnNmZX*",
↳ "*YgBpAHQAQwBhAGQAQbQBpAG4AIAAvAHQAQcBhAG4AcwBmAGUAQc*",
↳ "*Yml0c2FkbWluc90cmFuc2Zlc*",
↳ "*AGMAaAB1AG4AawBfAHMAaQB6AGUA*", "*JABjAGgAdQB0AGsAXwBzAGkAegBIA*",
↳ ", "*JGNodW5rX3Npem*", "*QAYwBoAHUAAbgBrAF8AcwBpAHoAZQ*",
↳ "*RjaHVua19zaXpl*", "*Y2h1bmtfc2l6Z*",
↳ "*AE8ALgBDAG8AbQBwAHIAZQBzAHMAaQBvAG4A*",
↳ "*kATwAuAEMAbwBtAHAACgBIAHMAcWBPAG8Abg*", "*IPLkNvbXByZXNzaW9u*",
↳ "*SQBPAC4AQwBvAG0AcABYAGUAQwBzAGkAbwBuA*", "*SU8uQ29tcHJlc3Npb2*",
↳ "*Ty5Db21wcmVzc2lvb*", "*AE8ALgBNAGUAQbQBvAHIAeQBTAHQAcgBIAQEAbQ*",
↳ "*kATwAuAE0AZQBtAG8AcgB5AFMAAdABYAGUAYQBtA*",
↳ "*IPLk1lbW9yeVN0cmVhb*", "*SQBPAC4ATQBIAQ0AbwByAHkAUwB0AHIAZQBhAG0A*",
↳ "*SU8uTWVtb3J5U3RyZWFr*", "*Ty5NZW1vcnltDHIY*",
↳ "*4ARwBIAHQAcwBoAHUAAbgBrA*", "*5HZXRDaHVua*", (continues on next page)
↳ "*AEcAZQB0AEMAaAB1AG4Aaw*",
```

(continued from previous page)

```

* *LgBHAGUAdABDAGgAdQBuaGSA*", "*LkdIdENodW5r*", "*R2V0Q2h1bm*",
→ "*AEgAUgBFAFEARABfAEkATgBGAE8ANgA0A*",
→ "*QASABSAEUAQQBFAF8ASQBOAEYATwA2ADQA*", "*RIUkVBRf9JTkZPNj*",
"*SFJFQURfSU5GTzY0*", "*VABIAFIARQBBAEQAXwBJAE4ARgBPADYANA*",
→ "*VEhSRUFEX0IOrk82N*",
"*AHIAZQBhAHQAZQBSAGUAbQBvAHQAZQBUAGgAcgBIAGEAZA*",
→ "*cmVhdGVSZW1vdGVUaHJlYW*",
→ "*MAcgBIAGEAdABIAFIAZQBtAG8AdABIAFQAaABYAGUAYQBkA*",
→ "*NyZWF0ZVJlbW90ZVRocmVhZ*", "*Q3JlYXRlUmVtb3RlVGhyZWfk*",
"*QwByAGUAYQB0AGUUAUgBIAG0AbwB0AGUAVABoAHIAZQBhAGQA*",
→ "*0AZQBtAG0AbwB2AGUA*", "*1lbW1vdm*", "*AGUAbQBtAG8AdgBIA*",
→ "*bQBIAG0AbQBvAHYAZQ*", "*bWVtbW92Z*", "*ZW1tb3Zl*"] -user IN EXCLUDED_
→ USERS

```

2.287 LP_Malicious File Execution Detected

- **Trigger Condition:** Execution of a suspicious file by *wscript* and *cscript*.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image IN ["*\\wscript.exe", "*\\cscript.exe"]  
→ command IN ["*.jse", "*.vbe", "*.js", "*.vba"] -user IN EXCLUDED_USERS
```

2.288 LP_Malicious Service Installations Detected

- **Trigger Condition:** Malicious service installs appearing in lateral movement, credential dumping, and other suspicious activity are detected.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Credential Dumping, System Services, Service Execution, New Service
- **ATT&CK ID:** T1003, T1569, T1569.002, T1543
- **Minimum Log Source Requirement:** Windows

- **Query:**

```
norm_id=WinServer event_id=7045 service in ["*\\PAExec*", "mssecsvc2.0", "*net user*",
↪ "WCESERVICE", "WCE SERVICE", "winexesvc.exe*", "*\\DumpSvc.exe", "pwdump*",
↪ "gsecdump*", "cachedump*"] -user IN EXCLUDED_USERS
```

2.289 LP_Malware Shellcode in Verclsid Target Process

- **Trigger Condition:** A process accessing `verclsid.exe` that injects shellcode from a Microsoft Office application or VBA macro is detected.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Process Injection, Verclsid
- **ATT&CK ID:** T1055, T1218.012
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=10 image="*\\verclsid.exe" access="0x1FFFFFF" (call_
↪ trace="*|UNKNOWN(*VBE7.DLL*" OR ("process"="*\\Microsoft Office\\*" call_trace=
↪ "*|UNKNOWN*")) -user IN EXCLUDED_USERS
```

2.290 LP_Malware Threat Connection from Malicious Source

- **Trigger Condition:** Inbound connection from malicious sources is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
(source_address=* OR destination_address=*) source_address in MALWARE_IP?
↪ destination_address IN HOMENET | process geoip(source_address) as country
```

2.291 LP_Malware Threat Connection to Malicious Destination

- **Trigger Condition:** Hosts make an outbound connection to malicious sources.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
(source_address=* OR destination_address=*) destination_address in MALWARE_IP
↪ source_address IN HOMENET | process geoip(destination_address) as country
```

2.292 LP_Malware Threat Connection to Malicious URLs

- **Trigger Condition:** A connection to a malicious URL is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
url=* source_address=* | process domain(url) as domain | search domain in MALWARE_URL
```

2.293 LP_Malware Threat Emails Sent to Attacker

- **Trigger Condition:** Email is sent to malware listed emails.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy, Exfiltration Over C2 Channel, Automated Exfiltration, Email Collection
- **ATT&CK ID:** T1090, T1041, T1020, T1114

- **Minimum Log Source Requirement:** Mail Server
- **Query:**

```
(receiver in MALWARE_EMAILS OR sender in MALWARE_EMAILS) sender=* receiver=?
↪ (host=* OR source_host=*) | rename source_host as host
```

2.294 LP_Meltdown and Spectre Vulnerabilities

- **Trigger Condition:** Meltdown and Spectre vulnerabilities are detected in the system.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1518, T1518.001
- **Minimum Log Source Requirement:** Vulnerability Management
- **Query:**

```
title=*spectre* or title=*meltdown* source_address=* | rename host as source_address ?
↪ chart count() by source_address, severity, cve_id, solution order by count() desc
```

2.295 LP_Meterpreter or Cobalt Strike Getsystem Service Start Detected

- **Trigger Condition:** The use of getsystem Meterpreter or Cobalt Strike command to obtain SYSTEM privileges by detecting a specific service starting.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Access Token Manipulation
- **ATT&CK ID:** T1134
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\services.exe" command IN ['*cmd*/c *?
↪ echo *\pipe\*', '%COMPSEC%*/c * echo *\pipe\*', '*rundll32*.dll,a*/p:*'] -command=
↪ "*MpCmdRun*" -user IN EXCLUDED_USERS
```

2.296 LP_Microsoft Office Memory Corruption Vulnerability CVE-2017-11882 Detected

- **Trigger Condition:** The exploitation of memory corruption vulnerability (CVE-2017-11882) in Microsoft Office is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** User Execution
- **ATT&CK ID:** T1204
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label="Process" label=Create parent_image='*EQNEDT32.EXE
↳ 'parent_command='*EQNEDT32.EXE*-Embedding' image='*.exe' -user IN EXCLUDED_
↳ USERS
```

2.297 LP_Mimikatz Command Line Detected

- **Trigger Condition:** Mimikatz command line arguments are detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, LSASS Memory, Security Account Manager, LSA Secrets, Cached Domain Credentials, DCSync
- **ATT&CK ID:** T1003, T1003.001, T1003.002, T1003.003, T1003.004, T1003.005, T1003.006
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*DumpCreds*", "*mimikatz*", "*::aadcookie*",
↳ ", "*::detours*", "*::memssp*", "*::mflt*", "*::ncroutemon*", "*::ngcsign*",
↳ "*::printrnightmare*", "*::skeleton*", "*::preshutdown*", "*::mstsc*", "*::multirdp*",
↳ "*rpc::*", "*token::*", "*crypto::*", "*dpapi::*", "*sekurlsa::*", "*kerberos::*",
↳ "*lsadump::*", "*privilege::*", "*process::*", "*vault::*", "*crypto::*", "*misc::*", "*event::*",
↳ ", "*IIS::AppHost*", "*net::*", "*sid::*", "*standard::*", "*vault::*"]
```

2.298 LP_Mitre Discovery Using Query Registry Detected

- **Trigger Condition:** Discovery uses the attack technique Query Registry.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Query Registry
- **ATT&CK ID:** T1012
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label="Process" label=Create commandline="*reg query*" -user IN EXCLUDED_USERS | process eval("attack_class='Discovery'") | process eval("technique='Query Registry'") | rename commandline as command | chart count() by user, host, domain, log_ts, command, attack_class, technique order by count() desc limit 10
```

2.299 LP_Mitre Discovery Using System Network Configuration Discovery Detected

- **Trigger Condition:** Discovery uses the attack technique System Network Configuration Discovery.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** System Network Configuration Discovery
- **ATT&CK ID:** T1016
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label="Process" label=Create (commandline="*ipconfig.exe*" OR commandline="*route.exe*" OR commandline="*netsh advfirewall*" OR commandline="*arp.exe*" OR commandline="*nbtstat.exe*" OR commandline="*netsh.exe*interface show" OR commandline="*net*config") -user IN EXCLUDED_USERS | process eval("attack_class='Discovery'") | process eval("technique='System Network Configuration Discovery'") | rename commandline as command | chart count() by user, host, domain, log_ts, command, attack_class, technique order by count() desc limit 10
```

2.300 LP_Mitre Persistence via Winlogon Helper DLL Detected

- **Trigger Condition:** Modifications in Winlogon registry keys are detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Winlogon Helper DLL
- **ATT&CK ID:** T1547, T1547.004
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4657 object=Winlogon event_category=Registry path=
↳ "*Windows NT\CurrentVersion*" new_value=*-user IN EXCLUDED_USERS
```

2.301 LP_MMC Spawning Windows Shell Detected

- **Trigger Condition:** Windows command line executable starting from MMC is detected.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Distributed Component Object Model
- **ATT&CK ID:** T1021.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label= "Process" label=Create parent_process="*\mmc.exe" ("process" IN ["*\cmd.exe",
↳ "*\powershell.exe", "*\pwsh.exe", "*\wscript.exe", "*\cscript.exe", "*\sh.exe", "*\bash.
↳ exe", "*\reg.exe", "*\regsvr32.exe"] OR "process"="*\BITSADMIN*") -user IN
↳ EXCLUDED_USERS
```

2.302 LP_Most Exploitable Vulnerabilities Detected

- **Trigger Condition:** The most exploitable vulnerabilities from 2015 are detected in a network. For this alert to work, MOST_EXPLOITABLE_CVE must be updated with the list of exploitable vulnerabilities.

- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning, Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1046, T1518, T1518.001
- **Minimum Log Source Requirement:** Vulnerability Management
- **Query:**

```
norm_id=VulnerabilityManagement cve_id IN MOST_EXPLOITABLE_CVE
```

2.303 LP_Mshta JavaScript Execution Detected

- **Trigger Condition:** The *mshta.exe* command is detected.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Signed Binary Proxy Execution, Mshta
- **ATT&CK ID:** T1218, T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image="*\mshta.exe" command="*javascript*" -  
↪ user IN EXCLUDED_USERS
```

2.304 LP_MSHTA Spawning Windows Shell Detected

- **Trigger Condition:** Windows command line executable started from MSHTA is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Mshta
- **ATT&CK ID:** T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create parent_process="*\mshta.exe" "process" IN ["*\cmd.exe",
↪ "powershell.exe", "wscript.exe", "cscript.exe", "sh.exe", "bash.exe", "reg.
↪ exe", "regsvr32.exe", "bitsadmin.exe"]
```

2.305 LP_MSHTA Suspicious Execution Detected

- **Trigger Condition:** *mshta.exe* suspicious execution patterns sometimes involving file polyglotism is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Deobfuscate/Decode Files or Information
- **ATT&CK ID:** T1140
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
event_id=1 image="*\mshta.exe" command IN ["*vbscript*", "*.jpg*", "*.png*", "*.lnk*",
↪ "*.xls*", "*.doc*", "*.zip*"] -user IN EXCLUDED_USERS
```

2.306 LP_MSTSC Shadowing Detected

- **Trigger Condition:** Hijacking of Remote Desktop Protocol (RDP) session using Microsoft Terminal Services Client (MSTSC) shadowing is detected.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Service Session Hijacking, RDP Hijacking
- **ATT&CK ID:** T1563, T1563.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command="*noconsentprompt*" command="*shadow:*" -
↪ user IN EXCLUDED_USERS
```

2.307 LP_Multiple Failed Login Followed by Successful Login Followed by Logoff

- **Trigger Condition:** Multiple failed login attempts are followed by successful login, and then by log off from the same user are detected.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access, Credential Access
- **ATT&CK Tag:** Valid Accounts, Brute Force
- **ATT&CK ID:** T1078, T1110
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
[incident_name="Multiple Failed User Login Followed by Successful Login" incident_
↪ user=*] as FirstAlert followed by [norm_id=WinServer* label=User label=Logoff user=* -
↪ user IN EXCLUDED_USERS] as Logoff on FirstAlert.incident_user=Logoff.user | rename
↪ Logoff.user as User, FirstAlert.incident_address as SourceAddress
```

2.308 LP_Named Pipe added to Null Session Detected

- **Trigger Condition:** A new value set for the NullSessionPipe registry key is detected.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services
- **ATT&CK ID:** T1021
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 "process"="*\reg.exe" target_object=
↪ "\lanmanserver\NullSessionPipes"
```

2.309 LP_Narrators Feedback-Hub Persistence Detected

- **Trigger Condition:** Attempt made to abuse Windows 10 Narrator's Feedback-Hub.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Registry Run Keys/Startup Folder
- **ATT&CK ID:** T1547, T1547.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
(event_id=12 event_type="DeleteValue" target_object=
↳ "*\AppXypsaf9f1qserqevf0s76dx4k9a5206\Shell\open\command\DelegateExecute")?
↳ OR (event_id=13 target_object=
↳ "*\AppXypsaf9f1qserqevf0s76dx4k9a5206\Shell\open\command\(\Default)")
```

2.310 LP_Net exe Execution Detected

- **Trigger Condition:** The execution of Net.exe, which can be suspicious or benign, is detected.
- **ATT&CK Category:** Lateral Movement, Discovery, Defense Evasion
- **ATT&CK Tag:** Obfuscated Files or Information, System Network Connections Discovery, Remote Services, Network Share Discovery
- **ATT&CK ID:** T1027, T1049, T1021, T1135
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image IN ["*\net.exe", "*\net1.exe"] command IN [
↳ "** group*", "** localgroup*", "** user*", "** view*", "** share", "** accounts*", "** use*", "**
↳ stop *"] -user IN EXCLUDED_USERS
```

2.311 LP_NetNTLM Downgrade Attack Detected

- **Trigger Condition:** Post exploitation using NetNTLM downgrade attacks. Adversaries may use a downgrade attack to force the use of a weaker version of the protocol, allowing them to intercept and crack the password hashes used for authentication.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools, Modify Registry
- **ATT&CK ID:** T1562, T1562.001, T1112
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id="WindowsSysmon" (event_id=13 target_object IN [
  ↳ "*SYSTEM\\*ControlSet*\\Control\\Lsa\\Lmcompatibilitylevel",
  ↳ "*SYSTEM\\*ControlSet*\\Control\\Lsa\\NtLmMinClientSec",
  ↳ "*SYSTEM\\*ControlSet*\\Control\\Lsa\\RestrictSendingNTLMTraffic"]) OR (norm_
  ↳ id=WinServer event_id=4657 object_name=
  ↳ "\\REGISTRY\\MACHINE\\SYSTEM\\*ControlSet*\\Control\\Lsa" object_value IN [
  ↳ "LmCompatibilityLevel", "NtLmMinClientSec", "RestrictSendingNTLMTraffic"])
```

2.312 LP_Netsh Port Forwarding Detected

- **Trigger Condition:** The *netsh* command used in the configuration of port forwarding is detected. Port forwarding is a pivoting technique that redirects traffic from one port to another.
- **ATT&CK Category:** Lateral Movement, Command and Control
- **ATT&CK Tag:** Proxy, Exploitation of Remote Services
- **ATT&CK ID:** T1090, T1210
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" "process"="*\\netsh.exe" command in ["*interface?
  ↳ portproxy add v4tov4 *", "*i p a v*"] -user IN EXCLUDED_USERS
```

2.313 LP_Network Share Connection Removed

- **Trigger Condition:** The removal of a share connection is detected. Adversaries removes share connections that are no longer useful to clean traces of their operation.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Network Share Connection Removal
- **ATT&CK ID:** T1070.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" "process" in ["*\net.exe", " *\net1.exe"] command =
↪ "*share*" command="*delete*"
```

2.314 LP_Network Share Discovery

- **Trigger Condition:** The net utility used to query a system for available shared drives using net view or net share command is detected. Adversaries look for folders and drive shared on remote systems to identify sources of information to gather as a precursor for collecting and identifying potential systems of interest for Lateral Movement.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Share Discovery
- **ATT&CK ID:** T1135
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process" IN ["*\net.exe", " *\net1.exe"] command="*net*
↪ " (command="*view*" command="*\\*") OR (command="*share*")) OR (command IN [
↪ "*get-smbshare *", "*Find-DomainShare*", "*Invoke-ShareFinder*",
↪ "*shareenumeration *") OR (command="*dir*" command="*\\*" command IN ["*c$",
↪ "*admin$*", "*IPC$*"])
```

2.315 LP_Network Sniffing Detected

- **Trigger Condition:** When the execution of network sniffing tools is detected. Adversaries may use network sniffing to intercept sensitive information, such as passwords or confidential data, as it is transmitted over the network. They may also use sniffing to gain visibility into network traffic and identify vulnerabilities or weaknesses.
- **ATT&CK Category:** Credential Access, Discovery
- **ATT&CK Tag:** Network Sniffing
- **ATT&CK ID:** T1040
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
'label="Process" label=create "process" IN ["*tshark.exe", "*windump.exe", "*logman.exe",
↳, "*tcpdump.exe", "*wprui.exe", "*wpr.exe"] -user IN EXCLUDED_USERS'
```

2.316 LP_New Firewall Port Opening Detected

- **Trigger Condition:** An opening of a new port in a firewall is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Non-Standard Port
- **ATT&CK ID:** T1571
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4657 object=FirewallRules event_category=Registry object_
↳ name="*ControlSet*FirewallPolicy\FirewallRules" new_value=* -user IN EXCLUDED_
↳ USERS | norm on new_value <:all>Action=<action:word><:all>Active=<active:word>
↳ <:all>Dir=<direction:word><:all>Protocol=<proto:int><:all>Port=<port:int><:all>
↳ Name=<rule:string><:\|'> | process eval("protocol = if(proto == 6) {return 'TCP'} else
↳ {return 'UDP'}")
```

2.317 LP_New RUN Key Pointing to Suspicious Folder Detected

- **Trigger Condition:** A new suspicious RUN key element pointing to an executable in a folder is detected.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Registry Run Keys/Startup Folder
- **ATT&CK ID:** T1547, T1547.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
event_id=13 target_object IN ["*\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Run\\*",
↪ "*\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\RunOnce\\*"] detail IN [
↪ "*C:\\Windows\\Temp\\*", "*\\AppData\\*", "%AppData%\\*", "*C:\\$Recycle.bin\\*",
↪ "*C:\\Temp\\*", "*C:\\Users\\Public\\*", "%Public%\\*", "*C:\\Users\\Default\\*",
↪ "*C:\\Users\\Desktop\\*", "wscript*", "cscript*"] -detail IN [
↪ "*\\AppData\\Local\\Microsoft\\OneDrive\\*"] -user IN EXCLUDED_USERS
```

2.318 LP_New Service Creation

- **Trigger Condition:** The creation of a new service is detected. Windows Services can allow the creation and management of long-running processes. It can start automatically and keep running for a long time after the user logs off. Adversaries might leverage this functionality to maintain persistence and escalate their privilege.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Create or Modify System Process, Windows Service
- **ATT&CK ID:** T1543, T1543.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" "process" IN ["*sc.exe", "*powershell.exe", "*cmd.exe"][2]
↪ command IN [ "*Get-WmiObject*Win32_Service*create*", "*create*binPath=*", "*New-
↪ Service*-BinaryPathName*", "*powershell*", "*mshta*", "*wscript*", "*cscript*",
↪ "*svchost*", "*dllhost*", "*cmd *", "*cmd.exe /c*", "*cmd.exe /k*", "*cmd.exe /r*",
↪ "*rundll32*", "*C:\\Users\\Public*", "*\\Downloads\\*", "*\\Desktop\\*", (continues on next page)
↪ "*\\Microsoft\\Windows\\Start Menu\\Programs\\Startup\\*", "*C:\\Windows\\TEMP\\*",
↪ "*\\AppData\\Local\\Temp\\*"] -user IN EXCLUDED_USERS
```

(continued from previous page)

2.319 LP_Non Interactive PowerShell Execution

- **Trigger Condition:** Non-interactive Command and Scripting interpreter, PowerShell activity by looking at *powershell.exe* with no *explorer.exe* as a parent is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("Process" IN ["*\powershell.exe", ".*\pwsh.exe"] OR (file
↪ IN ["PowerShell.EXE", "pwsh.dll"])) -(parent_process IN ["*C:\Windows\explorer.exe",
↪ "*C:\Windows\System32\CompatTelRunner.exe", "*C:\Windows\SysWOW64\explorer.
↪ exe", "C:\$WINDOWS.~BT\Sources\SetupHost.exe"]) -(parent_process="C:\Users\*"?
↪ parent_process="*\AppData\Local\Programs\Microsoft VS Code\Code.exe" parent_
↪ command="* --ms-enable-electron-run-as-node *")
```

2.320 LP_NoPowerShell Tool Activity Detected

- **Trigger Condition:** Execution of NoCommand and Scripting interpreter and PowerShell tool.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Shared Modules
- **ATT&CK ID:** T1129
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 -file in ["*cscript.exe.log", "*wscript.exe.log",
↪ "*wmic.exe.log", "*mshta.exe.log", "*svchost.exe.log", "*regsvr32.exe.log", "*rundll32.
↪ exe.log"] file="*.exe.log"
```

2.321 LP_NotPetya Ransomware Activity Detected

- **Trigger Condition:** NotPetya ransomware activity in which the extracted passwords are passed back to the main module via named pipe is detected. The file system journal of drive C is deleted, and window event logs are cleared using wevtutil.
- **ATT&CK Category:** Defense Evasion, Credential Access
- **ATT&CK Tag:** LSASS Memory, Rundll32, Clear Windows Event Logs
- **ATT&CK ID:** T1003.001, T1218.011, T1070.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (command IN ["*wevtutil cl Application & fsutil usn2
↪ deletejournal /D C:*", "*dllhost.dat %WINDIR%\ransoms*"] OR ("process"="*\rundll32.
↪ exe" command IN ["*.dat,#1", "*.dat #1", "*.zip.dll\*,#1"]) OR "*\perfc.dat*")
```

2.322 LP_Office365 Multiple Failed Login from Different Host by Single User

- **Trigger Condition:** A user attempts multiple failed logins from distinct hosts with a count greater than one.
- **ATT&CK Category:** Credential Access, Persistence, Defense Evasion, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Brute Force, Valid Accounts
- **ATT&CK ID:** T1110, T1078
- **Minimum Log Source Requirement:** Office365
- **Query:**

```
norm_id="Office365" source_address=* label=User label=Login label=Fail | chart distinct_
↪ count(source_address) as DC by user | search DC>1
```

2.323 LP_Office365 Multiple Failed Login from Same Host

- **Trigger Condition:** Multiple failed logins from the same host with a count greater than five.
- **ATT&CK Category:** Credential Access, Persistence, Defense Evasion, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Brute Force, Valid Accounts
- **ATT&CK ID:** T1110, T1078
- **Minimum Log Source Requirement:** Office365
- **Query:**

```
norm_id="Office365" source_address=* label=User label=Login label=Fail | chart count()
↪ as "Cnt" by user, source_address | search Cnt > 5
```

2.324 LP_Office365 Multiple Successful Login from Different Country by Single User

- **Trigger Condition:** A user attempts multiple failed logins from different countries with a count greater than one.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Office365
- **Query:**

```
norm_id="Office365" label=User label=login label=Successful source_address=*
↪ process geoup(source_address) as country | chart distinct_count(country) as DC by user
↪ search DC > 1
```

2.325 LP_Office365 Multiple Successful Login From Different Host by Single User

- **Trigger Condition:** A user attempts multiple successful logins from a distinct host with a count greater than one.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Office365
- **Query:**

```
norm_id="Office365" label=User label=login label=Successful source_address=* | chart?
↪ distinct_count(source_address) as DC by user | search DC > 1
```

2.326 LP_Office365 Password Resets

- **Trigger Condition:** A user's password is reset.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Account Manipulation
- **ATT&CK ID:** T1098
- **Minimum Log Source Requirement:** Office365
- **Query:**

```
norm_id="Office365" label=Password label=Reset user=*
```

2.327 LP_OpenWith Execution of Specified Binary Detected

- **Trigger Condition:** The execution of `OpenWith.exe` with command line argument `"-c"` or `"/c"` is detected.
- **ATT&CK Category:** -

- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create "process"="*\OpenWith.exe" command IN ["*/c*", "*-c*"] -
↪ user IN EXCLUDED_USERS
```

2.328 LP_Password Change on DSRM Account Detected

- **Trigger Condition:** Password change in Directory Service Restore Mode (DSRM) account is detected.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Account Manipulation
- **ATT&CK ID:** T1098
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4794 -user IN EXCLUDED_USERS
```

2.329 LP_Password Dumper Remote Thread in LSASS

- **Trigger Condition:** Password dumper activity by monitoring remote thread creation event ID 8 in combination with the lsass.exe process as *TargetImage* is detected. The process in the field *Process* is a malicious program and a single execution can lead to hundreds of events.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory
- **ATT&CK ID:** T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Remote label=Thread label=Create image="*\lsass.exe" start_module=""
```

2.330 LP_Password Spraying Attack Detected

- **Trigger Condition:** Multiple login fail attempts on a host by various users are detected. Adversaries can use a list of commonly used passwords against different versions to attempt to obtain valid account credentials.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Password Spraying
- **ATT&CK ID:** T1110.003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4625 | chart distinct_count(user) as UserCount, distinct_
↪ list(user) as Users by host | search UserCount > 5
```

2.331 LP_Persistence and Execution at Scale via GPO Scheduled Task

- **Trigger Condition:** Attempt to access the SYSVOL share, explicitly targeting the *ScheduleTasks.xml* file with writeData permissions. SYSVOL is a critical directory on Windows domain controllers that stores domain-wide data, including Group Policy objects.
- **ATT&CK Category:** Persistence, Execution, Privilege Escalation
- **ATT&CK Tag:** Scheduled Task/Job, Scheduled Task
- **ATT&CK ID:** T1053, T1053.005
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 share_name="\\*\SYSVOL" relative_target=
↪ "\\*ScheduleTasks.xml" access="*WriteData"
```

2.332 LP_Possible Access to ADMIN Share

- **Trigger Condition:** Access to \$ADMIN share is detected, which may help to detect lateral movement attempts. Since Windows Admin Share activity is so common, it provides adversaries with a powerful, discreet way to move laterally within an environment.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services
- **ATT&CK ID:** T1021
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5140 share_name="Admin$" -user="*$" -user IN EXCLUDED_USERS
```

2.333 LP_Possible Account Misuse-Privilege Escalation

- **Trigger Condition:** Non-admin users are assigned privileged access. The event maps to event ID of 4648 and 4672 in Windows.
- **ATT&CK Category:** Privilege Escalation, Persistence, Defense Evasion
- **ATT&CK Tag:** Account Manipulation, Abuse Elevation Control Mechanism, Bypass User Account Control
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
((label=Privilege label=Assign) or (label=Login label=Explicit label=Credential) user=* - user in ADMINS) OR (label=User label=Add label=Group user=* group=*admin*)
```

2.334 LP_Possible Applocker Bypass Detected

- **Trigger Condition:** Execution of potentially suspicious executables capable of bypassing AppLocker whitelisting. Adversaries often leverage executables such as *msdt.exe* and *msbuild.exe* to circumvent application whitelisting and execute malicious payloads.

- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution, Mshta, InstallUtil, Regsvcs/Regasm, Trusted Developer Utilities, MSBuild
- **ATT&CK ID:** T1218, T1218.004, T1218.009, T1127, T1218.005, T1127.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*\msdt.exe*", "*\installutil.exe*", "*\regsvcs.
↪exe*", "*\regasm.exe*", "*\msbuild.exe*", "*\ieexec.exe*"]
```

2.335 LP_File Download via Bitsadmin Detected

- **Trigger Condition:** Use of *bitsadmin* to download a file.
- **ATT&CK Category:** Defense Evasion, Persistence
- **ATT&CK Tag:** BITS Jobs
- **ATT&CK ID:** T1197
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
'label="Process" label=Create ("process"="*\bitsadmin.exe" (command IN ["*/create *", "*/
↪addfile *"] command="*http*")OR (7104command="*/transfer *")) OR (command="*copy
↪bitsadmin.exe*") -user IN EXCLUDED_USERS'
```

2.336 LP_Possible Botnet Connection-DNS Server Modified

- **Trigger Condition:** An unauthorized default Application Layer Protocol and DNS server modification are detected in Unix or Windows Server.
- **ATT&CK Category:** Impact, Command and Control, Defense Evasion
- **ATT&CK Tag:** Network Denial of Service, Proxy, Exploitation for Defense Evasion
- **ATT&CK ID:** T1498, T1090, T1211
- **Minimum Log Source Requirement:** Windows

- **Query:**

```
((norm_id=Unix action="RUN" (file="etc/resolv.conf" or file="*\etc\host")) or (norm_
↪ id=WinServer* (label=File (label=Write or label=Modify) path=
↪ "C:\Windows\System32\Drivers\etc" object="hosts") or (label=DNS label=Update
↪ (label=Successful or label=Request OR label=Fail)) (host=* or source_address=*)) -user
↪ IN EXCLUDED_USERS
```

2.337 LP_Possible CLR DLL Loaded Via Office Applications

- **Trigger Condition:** CLR DLL loaded by an Office Product like WinWord, PowerPoint Excel or Outlook is detected. Adversaries can use this technique to execute malicious scripts.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Attachment
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process" IN ["*\winword.exe", " *\powerpnt.exe",
↪ " *\excel.exe", " *\outlook.exe", " *\onenote.exe", " *\onenoteim.exe"] image IN ["*\clr.
↪ dll*"]
```

2.338 LP_Credential Dumping Tools Named Pipes Detected

- **Trigger Condition:** Well-known credential dumping tool execution via specifically named pipes like lsadump, cachedump, or wceservicepipe is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=17 pipe IN ["*\lsadump*", "*\cachedump*",
↪ "*\wceservicepipe*"]
```

2.339 LP_Possible Data Breach

- **Trigger Condition:** Unauthorized transfer of sensitive data is detected using mail applications, cloud applications, or other sources. For the alert to work, you must update the lists RESIGNED_EMPLOYEES, KNOWN_DOMAINS, and CLOUD_APPLICATIONS.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Web Service, Exfiltration to Cloud Storage
- **ATT&CK ID:** T1567, T1567.002
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
(label=Mail object="*attachment*" sender in RESIGNED_EMPLOYEES -receiver in
↪ KNOWN_DOMAINS) or (label=Object label=Access (label=Write or label=Modify)
↪ event_category="*Removable*" user in RESIGNED_EMPLOYEES) or (label=Access
↪ label=Object (label=Write or label=Modify) path IN CLOUD_APPLICATIONS user in
↪ RESIGNED_EMPLOYEES) or (label=Data label=Transfer label=Sensitive source_
↪ address=* destination_address=*)
```

2.340 LP_Possible Data Breach-Off Hour Transfer

- **Trigger Condition:** Unauthorized transfer of sensitive data during off-hours is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
(norm_id=*Firewall or norm_id=*IDS*) label=Connection source_address=* destination_
↪ address=* destination_port=* sent_datasize=* ((day_of_week(log_ts) IN ["Monday",
↪ "Tuesday", "Wednesday", "Thursday", "Friday"]) and (hour(log_ts)<9 or hour(log_ts)>
↪ 17)) or (day_of_week(log_ts) IN ["Saturday", "Sunday"]) | chart sum(sent_datasize)/1024/
↪ 1024 as TotalSentMB by user | search TotalSentMB>20
```

(continues on next page)

(continued from previous page)

2.341 LP_Possible DDOS Attack

- **Trigger Condition:** A considerable number of inbound traffic within a short period is detected.
- **ATT&CK Category:** Initial Access, Impact
- **ATT&CK Tag:** Exploit Public-Facing Application, Network Denial of Service
- **ATT&CK ID:** T1190, T1498
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
label=Deny ((protocol=icmp or application="icmp" or service=icmp) or (protocol=http or
↪ protocol=https) or (protocol=udp or 'dns reply' or 'SYN') source_address=* destination_
↪ address=* | chart count(source_address) as ddos_source by destination_address | search
↪ ddos_source>2000
```

2.342 LP_Possible Detection of SafetyKatz

- **Trigger Condition:** SafetyKatz behavior where a temp file *debug.bin* is created in temp folder to dump credentials using *lsass*.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, LSASS Memory
- **ATT&CK ID:** T1003, T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 path="*\Temp" file="debug.bin" -user IN
↪ EXCLUDED_USERS
```

2.343 LP_Possible DNS Rebinding Detected

- **Trigger Condition:** Different DNS answers by one domain with IPs from internal and external networks are detected. Typically, DNS-answer contains TTL greater than 100. Application Layer Protocol and DNS-record are saved in the host cache during TTL.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
event_id=22 query="*" status_code="0" query_result IN ["(::ffff:)?10.*", "(:ffff:)?192.168.*",
→ "(:ffff:)?172.16.*", "(:ffff:)?172.17.*", "(:ffff:)?172.18.*", "(:ffff:)?172.19.*", "(:ffff:)?172.20.*",
→ "(:ffff:)?172.21.*", "(:ffff:)?172.22.*", "(:ffff:)?172.23.*", "(:ffff:)?172.24.*", "(:ffff:)?172.25.*",
→ "(:ffff:)?172.26.*", "(:ffff:)?172.27.*", "(:ffff:)?172.28.*", "(:ffff:)?172.29.*", "(:ffff:)?172.30.*",
→ "(:ffff:)?172.31.*", "(:ffff:)?127.*"] -user IN EXCLUDED_USERS | chart
→ count(QueryName) as val by host | search val > 3
```

2.344 LP_Possible Empire Monkey Detected

- **Trigger Condition:** Execution of a specific command line sequence using the *cutil.exe* or *regsvr32.exe* tool.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** PowerShell, Regsvr32
- **ATT&CK ID:** T1059.001, T1218.010
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (command="*/i:%APPDATA%\logs.txt scrobj.dll" ("process
→ "*/i:\cutil.exe" OR description="Microsoft(C) Registerserver"))
```

2.345 LP_Possible Impacket Lateral Movement Detected

- **Trigger Condition:** Instances of lateral movement using the Impacket framework, specifically when utilizing the wmiexec, dcomexec, atexec and smbexec tools are detected.
- **ATT&CK Category:** Lateral Movement, Execution
- **ATT&CK Tag:** Windows Management Instrumentation, Inter-Process Communication, Distributed Component Object Model, Remote Services, Component Object Model, Component Object Model
- **ATT&CK ID:** T1047, T1559, T1021.003, T1021, T1559.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create command="*cmd.exe*" command="*/c*" command="*&1
↳ "*" (parent_process IN ["*\\wmiprvse.exe", "*\\mmc.exe", "*\\explorer.exe", "*\\services.
↳ exe"] command="*/Q*" command="*\\\\127.0.0.1\\*" ) OR (parent_command IN [
↳ "*svchost.exe -k netsvcs*", "*taskeng.exe*"] command="*Windows\\Temp\\*" ) host.exe -
↳ k netsvcs", "taskeng.exe*"] command IN ["cmd.exe /C *Windows\\Temp\\*&1" ])) -user IN
↳ EXCLUDED_USERS'
```

2.346 LP_Possible Impacket SecretDump Remote Activity

- **Trigger Condition:** Logpoint detects share_nameAD credential dumping using impacket secretdump HKTL.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 share_name="*\\ADMIN$" relative_target=
↳ "SYSTEM32\\*.tmp" -user IN EXCLUDED_USERS
```

2.347 LP_Possible Inbound Spamming Detected

- **Trigger Condition:** Logpoint detects possible inbound spam.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Mail Server
- **Query:**

```
(sender=* receiver=* -sender in KNOWN_DOMAINS) | chart distinct_count(receiver) as 2
↳ spam_receiver by sender | search spam_receiver>100
```

2.348 LP_Possible Insider Threat

- **Trigger Condition:** Logpoint detects alerts like privilege escalation, unauthorized access, and data breach for the same user.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Logpoint
- **Query:**

```
event_type="Possible Insider Threat" incident_user=* -incident_user in EXCLUDED_
↳ USERS | rename incident_user as user | chart distinct_count(incident_name) as 2
↳ AlertCount by user | search AlertCount>2
```

2.349 LP_Malicious Payload Download via Office Binaries

- **Trigger Condition:** An arbitrary file downloaded using Microsoft Office binaries is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer

- **ATT&CK ID:** T1105
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process" IN ["*\powerpnt.exe", ".*\winword.exe", ".*\excel.
↪exe"] OR file IN ["powerpnt.exe", "winword.exe", "excel.exe"]) command=".*http*" -
↪user IN EXCLUDED_USERS
```

2.350 LP_Reconnaissance using Windows Binaries Detected

- **Trigger Condition:** Possible reconnaissance activities using Windows binaries. Adversaries use this technique to discover information such as OS, user, network, subnets, file shares, and domain trust, which will be used for further actions.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** System Network Configuration Discovery, System Owner/User Discovery, Permission Groups Discovery, Domain Groups, System Information Discovery, Account Discovery, Domain Account, Network Share Discovery, Domain Trust Discovery
- **ATT&CK ID:** T1016, T1033, T1069, T1069.002, T1082, T1087, T1087.002, T1135, T1482
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN ["*\whoami.exe", ".*\nltest.exe", ".*\net1.exe",
↪".*\ipconfig.exe", ".*\systeminfo.exe", ".*\net.exe", ".*\route.exe", ".*\quser.exe",
↪".*\qwinsta.exe", ".*\netstat.exe", ".*\nbtstat.exe"] | chart distinct_count(command) as cnt,
↪distinct_list(command) as command by user,host | search cnt > 4
```

2.351 LP_PowerShell Script Execution from Suspicious Location

- **Trigger Condition:** Suspicious command line that invokes PowerShell from a suspicious location.
- **ATT&CK Category:** Execution

- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows, PowerShell
- **Query:**

```
label="Create" label="Process" command IN ["*powershell*", "*pwsh*"] command="*-c *
↪ " command IN ["*\AppData*", "*\ProgramData*", "*\Users\Public*", "*\PerfLogs*",
↪ "*\Windows\Temp*", "*\Windows\Tracing*"]
```

2.352 LP_Possible Malware Detected

- **Trigger Condition:** A file or software is detected as worm, virus, trojan, or malware.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Antivirus
- **Query:**

```
(label=Malware or label=Threat or label=Virus or label=Quarantine or label=Risk)
↪ (malware=* OR risk=* OR virus=*) (file=* or application=* or url=*)
```

2.353 LP_Possible Modification of Boot Configuration

- **Trigger Condition:** Use of the bcdedit command to delete or modify Boot Configuration Data. Boot Configuration Data (BCD) files provide a store that describes boot applications and application settings. Boot configuration data edit (bcdedit) allows manipulation of BCD. This tactic is used by malware or attackers to prevent system recovery. Legitimate usage can trigger this alert. We recommend including legitimate users in the EXCLUDED_USERS list.
- **ATT&CK Category:** Impact, Defense Evasion, Persistence
- **ATT&CK Tag:** Inhibit System Recovery, Pre-OS Boot, Bootkit
- **ATT&CK ID:** T1490, T1542, T1542.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

- **Query:**

```
label="Process" label="Create" ((("process"="*\bcdedit.exe" command IN ["*deletevalue*",
↪ ", "*delete*", "*import*", "*set*"]) OR ((command="*bootstatuspolicy*" command=
↪ "*ignoreallfailures*") OR (command="*recoveryenabled*" command="*no*"))))
```

2.354 LP_Possible Outbound Spamming Detected

- **Trigger Condition:** Mail received or sent to domains not included in the KNOWN_DOMAINS list is detected. The KNOWN_DOMAINS lists need to be updated with the domains known to communicate to and from the organization.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Mail Server
- **Query:**

```
(sender=* receiver=* -receiver in KNOWN_DOMAINS sender in KNOWN_DOMAINS) 
↪ chart distinct_count(receiver) as spam_receiver by sender | search spam_receiver>100
```

2.355 LP_Possible Pass the Hash Activity Detected

- **Trigger Condition:** When the attack technique passes the hash, which is used to move laterally inside the network. Pass the hash is a method of authenticating to a system using a password hash rather than the actual password. Adversaries may use this technique to gain unauthorized access to a system, bypassing normal authentication controls. Pass the hash attacks can be challenging to detect and prevent, as they do not involve using a clear-text password.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Use Alternate Authentication Material, Pass the Hash
- **ATT&CK ID:** T1550, T1550.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4624 ((caller_id="S-1-0-0" logon_type="3" logon_process=
↪ "NtLmSsp" key_length="0") OR (logon_type="9" logon_process="seclogo")) -user=
↪ "ANONYMOUS LOGON" -user IN EXCLUDED_USERS
```

2.356 LP_Possible Privilege Escalation via Weak Service Permissions

- **Trigger Condition:** The sc.exe utility spawning by a user with medium integrity level to change the service ImagePath or FailureCommand is detected.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Access Token Manipulation
- **ATT&CK ID:** T1134
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create "process"="*\\sc.exe" integrity_level="Medium" command
↪ IN ["*config*binPath*", "*failure*command*"] -user IN EXCLUDED_USERS
```

2.357 LP_Possible Process Hollowing Image Loading

- **Trigger Condition:** Loading of samlib.dll or WinSCard.dll from untypical process is detected. For example, through process hollowing by Mimikatz.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Hijack Execution Flow, DLL Side-Loading, Process Injection, Process Hollowing
- **ATT&CK ID:** T1574, T1574.002, T1055, T1055.012
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process" IN ["*\\notepad.exe"] image IN [
↪ "*\\samlib.dll", "*\\WinSCard.dll"] -user IN EXCLUDED_USERS
```

2.358 LP_Possible SPN Enumeration Detected

- **Trigger Condition:** *Service Principal Name Enumeration* used for Steal or Forge Kerberos Tickets and Kerberoasting is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Steal or Forge Kerberos Tickets, Kerberoasting
- **ATT&CK ID:** T1558, T1558.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create command="*-q*" "process"="*\setspn.exe" -user IN[?]
↪ EXCLUDED_USERS
```

2.359 LP_Possible SquiblyTwo Detected

- **Trigger Condition:** WMI SquiblyTwo Attack with possible renamed WMI seeking for imphash is detected.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Windows Management Instrumentation, Visual Basic, JavaScript, XSL Script Processing
- **ATT&CK ID:** T1047, T1059.005, T1059.007, T1220
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 file="wmic.exe" hash_imphash IN [
↪ "1B1A3F43BF37B5BFE60751F2EE2F326E", "37777A96245A3C74EB217308F3546F4C",
↪ "9D87C9D67CE724033C0B40CC4CA1B206"] command="*format:*" command="*http*"
```

2.360 LP_Possible Taskmgr run as LOCAL_SYSTEM Detected

- **Trigger Condition:** Creation of a *taskmgr.exe* process in the context of LOCAL_SYSTEM is detected. *Taskmgr.exe* is the executable file for Windows Task Manager.

- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\taskmgr.exe" user in ["*AUTHORI*",
↪ "*AUTORI*"]
```

2.361 LP_Powershell AMSI Bypass via dotNET Reflection

- **Trigger Condition:** Request to *amsilnitFailed* used to disable AMSI Scanning is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
'label="Process" label=Create command IN ["*System.Management.Automation.AmsiUtils*"] [?]
↪ command IN ["*amsilnitFailed*"] -user IN EXCLUDED_USERS'
```

2.362 LP_PowerShell Base64 Encoded Shellcode Detected

- **Trigger Condition:** Potential Base64 encoded shellcode for PowerShell memory injection is detected.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Process Injection
- **ATT&CK ID:** T1055
- **Minimum Log Source Requirement:** Windows, PowerShell

- **Query:**

```
norm_id=WinServer event_id=4104 script_block="*AAAAYInIM*" script_block IN [
↪ "*OiCAAAAYInIM*", "*OiJAAAAYInIM*"]
```

2.363 LP_PowerShell Network Connections Detected

- **Trigger Condition:** Logpoint detects a Command and Scripting Interpreter and PowerShell process that opens network connections. We recommend you check suspicious target ports and systems, and adjust them according to your environment. For example, extend filters with the company's IP range.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 image="*\powershell.exe" initiated="true" -
↪ destination_address IN HOMENET -user="NT AUTHORITY\SYSTEM" -user IN ?
↪ EXCLUDED_USERS
```

2.364 LP_PowerShell Profile Modification

- **Trigger Condition:** Modification of a PowerShell profile using the Write-Output or Add-Content command.
- **ATT&CK Category:** Persistence, Privilege Escalation, Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, Event Triggered Execution, PowerShell Profile, Powershell
- **ATT&CK ID:** T1546, T1546.013, T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id=WinServer event_id=4103 command in ["*Write-Output*", "*Add-Content*"] ?
↪ payload= "*powershell_profile*"
```

2.365 LP_PowerShell Rundll32 Remote Thread Creation Detected

- **Trigger Condition:** Creation of a remote thread from a Powershell process in a rundll32 process.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** PowerShell, Rundll32
- **ATT&CK ID:** T1059.001, T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Remote" label="Thread" label="Create" "process" IN ["*\powershell.exe", "pwsh.
↪exe"] image="*\rundll32.exe" -user IN EXCLUDED_USERS
```

2.366 LP_PowerShell Version Downgrade Detected

- **Trigger Condition:** Execution of legacy PowerShell version 2.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell, Downgrade Attack
- **ATT&CK ID:** T1059, T1059.001, T1562.010
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
(norm_id=WinServer event_id=400 event_source="Powershell" host_version="*2*" -
↪engine_version="*2*") OR (label="Process" label="Create" "process"="*\powershell.
↪exe" (command IN ["*-
```

2.367 LP_Process Dump via Comsvcs DLL Detected

- **Trigger Condition:** Process memory dump via comsvcs.dll and rundll32 is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping

- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 (image="*\rundll32.exe" OR file="RUNDLL32.EXE
↪") command IN ["*comsvcs*MiniDump*full*", "*comsvcs*MiniDumpW*full*"] -user IN
↪EXCLUDED_USERS
```

2.368 LP_Process Dump via Rundll32 and Comsvcs Detected

- **Trigger Condition:** Process memory dump performed via ordinal function 24 in *comsvcs.dll* is detected.
- **ATT&CK Category:** Defense Evasion, Credential Access
- **ATT&CK Tag:** Masquerading, OS Credential Dumping, LSASS Memory
- **ATT&CK ID:** T1036, T1003, T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 command IN ["*comsvcs.dll, #24*", "*comsvcs.dll,
↪MiniDump*"] -user IN EXCLUDED_USERS
```

2.369 LP_Process Hollowing Detected

- **Trigger Condition:** Adversaries attempts to inject malicious code into suspended and hollowed processes to evade process-based defenses.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Process Injection, Process Hollowing
- **ATT&CK ID:** T1055, T1055.012
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 (image="*smss.exe" parent_command!="*smss.
↪exe") or (image="*csrss.exe" (parent_command!="*smss.exe" and parent_command!=
↪"*svchost.exe")) or (image="*wininit.exe" parent_command!="*smss.exe") or (image=
↪"*winlogon.exe" parent_command!="*smss.exe") or (image="*lsass.exe" parent_
↪command!="*wininit.exe") or (image="*LogonUI.exe" (parent_command!="*winlogon.
↪exe" and parent_command!="*wininit.exe")) or (image="*services.exe" parent_
↪command!="*wininit.exe") or (image="*spoolsv.exe" parent_command!="*services.exe
↪") or (image="*taskhost.exe" (parent_command!="*services.exe" and parent_command!
↪="*svchost.exe")) or (image="*taskhostw.exe" (parent_command!="*services.exe" and
↪parent_command!="*svchost.exe")) or (image="*userinit.exe" (parent_command!=
↪"*dwm.exe" and parent_command!="*winlogon.exe")) -user IN EXCLUDED_USERS
```

2.370 LP_Process Injection Detected

- **Trigger Condition:** Adversaries injects code into processes to evade process-based defenses and possibly elevate privileges using commands like `Invoke-DllInjection`.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Process Injection
- **ATT&CK ID:** T1055
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 (command="*Invoke-DllInjection*" or command=
↪"*C:\windows\syste native\*") -user IN EXCLUDED_USERS
```

2.371 LP_Protected Storage Service Access Detected

- **Trigger Condition:** An access to a `protected_storage` service over the network is detected. The potential abuse of DPAPI to extract domain backup keys from Domain Controllers.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services
- **ATT&CK ID:** T1021
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 share_name="*IPC*" relative_target="protected_
↪storage" -user IN EXCLUDED_USERS
```

2.372 LP_PsExec Tool Execution Detected

- **Trigger Condition:** PsExec service installation and execution event (Service and Sysmon) is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** System Services, Service Execution
- **ATT&CK ID:** T1569, T1569.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
((norm_id=WinServer service="PSEXESVC" event_id IN [7045, 7036]) OR (norm_
↪id=WindowsSysmon event_id=1 "process"="*\PSEXESVC.exe" user="*SYSTEM*")) -
↪user IN EXCLUDED_USERS
```

2.373 LP_Psr Capture Screenshots Detected

- **Trigger Condition:** The psr utility adversaries use to take screen captures of the desktop to gather information throughout an operation is detected. The psr.exe utility is a legitimate Windows application that captures desktop screenshots.
- **ATT&CK Category:** Collection
- **ATT&CK Tag:** Screen Capture
- **ATT&CK ID:** T1113
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\Psr.exe" command="*/start*" -user IN
↪EXCLUDED_USERS
```

2.374 LP_Pulse Secure Arbitrary File Reading Detected

- **Trigger Condition:** The exploitation of arbitrary file reading vulnerability (CVE-2019-11510) in Pulse Secure is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** External Remote Services
- **ATT&CK ID:** T1113
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
norm_id=* url IN ['*dana*guacamole*', '*lmdb*data.mdb*', '*data*mtmp/system*']
```

2.375 LP_Query Registry Network

- **Trigger Condition:** Adversaries uses *reg.exe* component for network connection and interact with the Windows Registry to gather information about the system, configuration, and installed software.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Query Registry
- **ATT&CK ID:** T1012
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 image="*reg.exe" command="*reg query*" -user[?]
↪ IN EXCLUDED_USERS
```

2.376 LP_Rare Scheduled Task Creations Detected

- **Trigger Condition:** Rare scheduled task creations are detected. A software gets installed on multiple systems. The aggregation and count function selects tasks with rare names.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Scheduled Task/Job, Scheduled Task

- **ATT&CK ID:** T1053, T1053.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id="106" | chart count() as val by task | search val < 5
```

2.377 LP_RDP Login from Localhost Detected

- **Trigger Condition:** RDP login with a localhost source address that may be a tunneled login is detected.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services, Remote Desktop Protocol
- **ATT&CK ID:** T1021, T1021.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4624 logon_type="10" source_address IN ["::1", "127.0.0.1  
↪"] -user IN EXCLUDED_USERS
```

2.378 LP_RDP Over Reverse SSH Tunnel Detected

- **Trigger Condition:** svchost hosting RDP termsvcs communicating with the loopback address and on TCP port 3389 is detected.
- **ATT&CK Category:** Lateral Movement, Command and Control
- **ATT&CK Tag:** Remote Services, Remote Desktop Protocol, Protocol Tunneling
- **ATT&CK ID:** T1021, T1021.001, T1572
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 "process"="*\svchost.exe" is_initiated="true" [?  
↪] source_port="3389" destination_address IN ["127.*", "::1"] -user IN EXCLUDED_USERS
```

2.379 LP_RDP Registry Modification

- **Trigger Condition:** Potential malicious modification of the property value of fDenyTS Connections and UserAuthentication to enable remote desktop connections is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object IN [
  ↳ "*\CurrentControlSet\Control\Terminal Server\WinStations\RDP-Tcp\UserAuthentication
  ↳ ", "*\CurrentControlSet\Control\Terminal Server\DenyTSConnections"] details=
  ↳ "DWORD (0x00000000)" -user IN EXCLUDED_USERS
```

2.380 LP_RDP Sensitive Settings Changed

- **Trigger Condition:** Changes registry keys related to RDP terminal service are detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object IN [
  ↳ "*\services\TermService\Parameters\ServiceDll*", "*\Control\Terminal
  ↳ Server\SingleSessionPerUser*", "*\Control\Terminal Server\DenyTSConnections*" ] -
  ↳ user IN EXCLUDED_USERS
```

2.381 LP_Reconnaissance Activity with Net Command

- **Trigger Condition:** A set of commands often used in recon stages by different attack groups to discover the victim's information, systems, or network are detected.
- **ATT&CK Category:** Discovery, Reconnaissance
- **ATT&CK Tag:** Account Discovery, System Information Discovery, Gather Victim Host Information, Gather Victim Identity Information
- **ATT&CK ID:** T1087, T1082, T1589, T1592
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 command IN ["tasklist", "net time", "systeminfo",
↪ "whoami", "nbtstat", "net start", "*\net1 start", "qprocess", "nslookup", "hostname.exe",
↪ "\net1 user /domain", "\net1 group /domain", "\net1 group *domain admins* /",
↪ domain", "\net1 group *Exchange Trusted Subsystem* /domain", "\net1 accounts /",
↪ domain", "\net1 user net localgroup administrators", "netstat -an"]
-user IN EXCLUDED_USERS | chart count() as val by command | search val > 4
```

2.382 LP_RedSocks Backdoor Connection

- **Trigger Condition:** A backdoor event is detected. Adversaries develops malware and malware components as backdoors, which are used during targeting.
- **ATT&CK Category:** Resource Development
- **ATT&CK Tag:** Develop Capabilities, Malware
- **ATT&CK ID:** T1587, T1587.001
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks description="*\backdoor*" | process geoip(destination_address) as
↪ country
```

2.383 LP_RedSocks Bad Neighborhood Detection

- **Trigger Condition:** A bad neighborhood is detected where adversaries use a connection proxy to direct network traffic between systems or act as an intermediary for network communications to a Command and Control server to avoid direct connections to their infrastructure.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks category="bad hood" | process geoip(destination_address) as country
```

2.384 LP_RedSocks Blacklist URL Detection

- **Trigger Condition:** Blacklist URLs are detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks category="URL blacklist" | process geoip(destination_address) as ?  
↪ country
```

2.385 LP_RedSocks FileSharing

- **Trigger Condition:** Filesharing using an alternate platform like 4Shared, FileHippo, Torrent, Picofile, or WeTransfer is detected.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration over Alternative Protocol

- **ATT&CK ID:** T1048
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks category="Filesharing" description in ["*4share*", "*torrent*",
↪ "*FileHippo*", "*picofile*", "*wettransfer*"] | process geoiip(destination_address) as?
↪ country
```

2.386 LP_RedSocks Ransomware Connection

- **Trigger Condition:** A ransomware event is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Disk Wipe, Disk Content Wipe, Data Encrypted for Impact, Data Destruction, Proxy
- **ATT&CK ID:** T1561, T1561.001, T1486, T1485, T1090
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks description="*ransomware*" | process geoiip(destination_address) as?
↪ country
```

2.387 LP_RedSocks Sinkhole Detection

- **Trigger Condition:** Sinkhole is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks category="Sinkhole" | process geoiip(destination_address) as country
```

2.388 LP_RedSocks Tor Connection

- **Trigger Condition:** A Tor connection is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks category="tor" | process geoip(destination_address) as country
```

2.389 LP_RedSocks Trojan Connection

- **Trigger Condition:** A trojan event is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Redsocks
- **Query:**

```
norm_id=RedSocks description="*trojan*" | process geoip(destination_address) as country
```

2.390 LP_Register new Logon Process by Rubeus

- **Trigger Condition:** Potential use of Rubeus via registered new trusted logon process is detected. Adversaries abuses a valid Kerberos ticket-granting ticket (TGT) or sniff network traffic to obtain a ticket-granting service (TGS) ticket that may be vulnerable to Brute Force.
- **ATT&CK Category:** Lateral Movement, Privilege Escalation
- **ATT&CK Tag:** Steal or Forge Kerberos Tickets, Kerberoasting
- **ATT&CK ID:** T1558, T1558.003

- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4611 logon_process="User32LogonProcess" -user IN
↳ EXCLUDED_USERS
```

2.391 LP_Registry Persistence Mechanisms Detected

- **Trigger Condition:** Persistence registry keys at the current version folder for registry keys are detected. Adversaries establish persistence and/or elevate privileges by executing malicious content triggered by Image File Execution Options (IFEO) debuggers.
- **ATT&CK Category:** Privilege Escalation, Persistence
- **ATT&CK Tag:** Event Triggered Execution, Image File Execution Options Injection
- **ATT&CK ID:** T1546, T1546.012
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
event_id=13 target_object IN ["*\SOFTWARE\Microsoft\Windows
↳ NT\CurrentVersion\Image File Execution Options\*\GlobalFlag",
↳ "\SOFTWARE\Microsoft\Windows
↳ NT\CurrentVersion\SilentProcessExit\*\ReportingMode",
↳ "\SOFTWARE\Microsoft\Windows
↳ NT\CurrentVersion\SilentProcessExit\*\MonitorProcess"] event_type="SetValue" -user
↳ IN EXCLUDED_USERS
```

2.392 LP_Regsvcs-Regasm Detected

- **Trigger Condition:** Adversaries abuses trusted Windows command line utilities *regsvcs* and *regasm* for proxy execution of code.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution, Regsvcs/Regasm
- **ATT&CK ID:** T1218, T1218.009
- **Minimum Log Source Requirement:** Windows Sysmon

- **Query:**

```
norm_id=WindowsSysmon event_id=3 (image="*regsvcs.exe" or image="*regasm.exe")
```

2.393 LP_Remote PowerShell Session

- **Trigger Condition:** Remote PowerShell sessions on endpoints are detected. Powershell allows functionality to execute code on a remote system without using RDP.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(norm_id=WinServer event_id IN ["4103", "400"] execution_host="ServerRemoteHost" host_
↪ application="*wsmprovhost.exe*")OR (label="Process" label=Create ("process" =
↪ "*\wsmprovhost.exe" OR parent_process="*\wsmprovhost.exe"))
```

2.394 LP_Remote System Discovery

- **Trigger Condition:** The components like net.exe and ping.exe are used to list other systems by IP address, hostname, or other logical identifiers on a network used for Lateral Movement from the current system.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Remote System Discovery
- **ATT&CK ID:** T1018
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (image="*net.exe" or image="*ping.exe") (command="*view*
↪ " or command="*ping*") -user IN EXCLUDED_USERS
```

2.395 LP_Renamed Binary Detected

- **Trigger Condition:** The execution of a renamed binary is detected. Renamed binaries are executable files disguised in a different name or file extension to evade detection by security measures.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rename System Utilities
- **ATT&CK ID:** T1036.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create (application = "Sysinternals PsExec" OR description IN
["Windows PowerShell*", "pwsh*", "Execute processes remotely"]) OR file IN
["powershell.exe", "pwsh.dll", "powershell_ise.exe", "psexec.exe", "psexec.c", "psexesvc.
↪ exe", "cscript.exe", "wscript.exe",
"mshta.exe", "regsvr32.exe", "wmic.exe", "certutil.exe", "rundll32.exe", "cmstp.exe",
↪ "msiexec.exe", "reg.exe"]
- "process" IN ["*\powershell.exe", ".*\pwsh.exe", ".*\powershell_ise.exe", ".*\psexec.exe",
↪ ".*\psexec64.exe", ".*\PSEXESVC.exe", ".*\cscript.exe", ".*\wscript.exe", ".*\mshta.exe",
↪ ".*\regsvr32.exe", ".*\wmic.exe", ".*\certutil.exe", ".*\rundll32.exe", ".*\cmstp.exe",
↪ ".*\msiexec.exe", ".*\reg.exe"]) -user IN EXCLUDED_USERS
```

2.396 LP_Renamed PsExec Detected

- **Trigger Condition:** Execution of a renamed *PsExec* used by attackers or malware.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon message="Execute processes remotely" product=
↪ "Sysinternals PsExec" -image IN ["*\PsExec.exe", ".*\PsExec64.exe"]
```

2.397 LP_Rogue Access Point Detected

- **Trigger Condition:** Rouge access point is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Exploitation for Defense Evasion, Exploitation for Defense Evasion, Software Discovery, Security Software Discovery
- **ATT&CK ID:** T1211, T1211, T1518, T1518.001
- **Minimum Log Source Requirement:** Firewall, IDS/IPS (ArubaOS, Cisco Controller)
- **Query:**

```
label=Accesspoint label=Rogue -label=Clear access_point=*
```

2.398 LP_RSA SecurID Account Lockout

- **Trigger Condition:** User's account is locked after entering the wrong passcode multiple times in a row.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Brute Force
- **ATT&CK ID:** T1110
- **Minimum Log Source Requirement:** RSA Secure ID
- **Query:**

```
norm_id=RSA_SecurID type=Runtime action=AUTHN_LOCKOUT_EVENT
```

2.399 LP_RSA SecurID Account Lockout

- **Trigger Condition:** User's account is locked after entering the wrong passcode multiple times in a row.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Brute Force
- **ATT&CK ID:** T1110

- **Minimum Log Source Requirement:** RSA Secure ID
- **Query:**

```
norm_id=RSA_SecurID type=Runtime action=AUTHN_LOCKOUT_EVENT
```

2.400 LP_Rubeus Hack Tool Detected

- **Trigger Condition:** Command line parameters like asreproast, dump, impersonate user and harvest used by the Rubeus hack tool are detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command IN ["*asreproast *", "*dump /service:krbtgt *",
↪ "*dump /luid:0x*", "*kerberoast *", "*createnetonly /program:*", "*ptt /ticket:*", "* /
↪ impersonateuser:*", "*renew /ticket:*", "*asktgt /user:*", "*harvest /interval:*", "*s4u /
↪ user:*", "*s4u /ticket:*", "*hash /password:*", "*golden /aes256:*", "*silver /user:*"] (
↪ "process" = "*\Rubeus.exe" OR file="Rubeus.exe" OR description="Rubeus")
```

2.401 LP_Run PowerShell Script from ADS Detected

- **Trigger Condition:** PowerShell script execution from Alternate Data Stream (ADS) is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Hide Artifacts, NTFS File Attributes
- **ATT&CK ID:** T1564, T1564.004
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process IN ["*\powershell.exe", "*\pwsh.exe"]
↪ "process" IN ["*\powershell.exe", "*\pwsh.exe"] command="*Get-Content*"
↪ command="*-Stream*" -user IN EXCLUDED_USERS
```

2.402 LP_Rundll32 Internet Connection Detected

- **Trigger Condition:** A rundll32 that communicates with public IP addresses is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rundll32
- **ATT&CK ID:** T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 "process"="*\rundll32.exe" is_initiated="true" -
↪(((destination_address IN HOMENET) OR destination_address IN ["127.*", "20.*", "51.
↪103.*", "51.104.*", "51.105.*"] OR (command="*PcaSvc.dll,PcaPatchSdbTask*" OR
↪source_host="*.internal.cloudapp.net")) OR (parent_process=
↪"C:\Windows\System32\svchost.exe" destination_port="443")) -user IN EXCLUDED_
↪USERS
```

2.403 LP_Scheduled Task Creation Detected

- **Trigger Condition:** The creation of scheduled task is detected. Schtasks is a windows internal binary that allows us to schedule tasks.
- **ATT&CK Category:** Execution, Persistence, Privilege Escalation
- **ATT&CK Tag:** Scheduled Task/Job, Scheduled Task
- **ATT&CK ID:** T1053, T1053.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label="Process" label=Create "process"="*\schtasks.exe" command="* /create *" -user
↪IN EXCLUDED_USERS) OR (label="Registry" label="Key" label="Map" "target_object
↪"="*\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Schedule\TaskCache\Tree\*" -
↪target_object IN ["*\SOFTWARE\Microsoft\Windows
↪NT\CurrentVersion\Schedule\TaskCache\Tree\Microsoft\Windows\UpdateOrchestrator*
↪"] event_type=CreateKey) OR (norm_id=WinServer event_id=4698 (-command IN [
↪"*MpCmdRun.exe", "*msfeedssync.exe", "*usoclient.exe"] OR (-task=
↪"\CreateExplorerShellUnelevatedTask" command="*explorer.exe")))
```

2.404 LP_SCM Database Handle Failure Detected

- **Trigger Condition:** Non-system user fails to get a handle of the SCM database.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Endpoint Denial of Service
- **ATT&CK ID:** T1499
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4656 object_type="SC_MANAGER OBJECT" object_name=
↪ "servicesactive" event_type="Audit Failure" logon_id="0x3e4" -user IN EXCLUDED_
↪ USERS
```

2.405 LP_SCM Database Privileged Operation Detected

- **Trigger Condition:** Non-system user performs privileged operation on the SCM database.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Account Control
- **ATT&CK ID:** T1548, T1548.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4674 object_type="SC_MANAGER OBJECT" object_name=
↪ "servicesactive" privilege="SeTakeOwnershipPrivilege" logon_id="0x3e4" -user IN
↪ EXCLUDED_USERS
```

2.406 LP_Screensaver Activities Detected

- **Trigger Condition:** Screensaver registry key modified via *rundll32.exe* is detected.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Screensaver

- **ATT&CK ID:** T1546.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) (target_object=
↪ "*\Control Panel\Desktop\SCRNSAVE.exe") (parent_command!="*explorer.exe" or
↪ image!="*rundll32.exe" or command!="*shell32.dll, Control_RunDLL desk.cpl,
↪ ScreenSaver, *") -user IN EXCLUDED_USERS
```

2.407 LP_Secure Deletion with SDelete

- **Trigger Condition:** Logpoint detects renaming of a file during deletion using SDelete tool.
- **ATT&CK Category:** Defense Evasion, Impact
- **ATT&CK Tag:** Indicator Removal on Host, File Deletion, Obfuscated Files or Information, Indicator Removal from Tools, Data Destruction, Subvert Trust Controls, Code Signing
- **ATT&CK ID:** T1070, T1070.004, T1027, T1027.005, T1485, T1553, T1553.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN ["4656", "4663", "4658"] object_name IN ["*.AAA", "*.ZZZ
↪ "] -user IN EXCLUDED_USERS
```

2.408 LP_SecurityXploded Tool Detected

- **Trigger Condition:** Execution of the SecurityXploded tools. Adversaries abuse these tools for credential access or other malicious purposes.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Credentials from Password Stores
- **ATT&CK ID:** T1555
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (vendor="SecurityXploded" OR "process"=
↪ "*PasswordDump.exe" OR file="*PasswordDump.exe") -user IN EXCLUDED_USERS
```

2.409 LP_smbexec Service Installation Detected

- **Trigger Condition:** Usage of the `smbexec.py` tool to identify a specific service installation.
- **ATT&CK Category:** Lateral Movement, Execution
- **ATT&CK Tag:** SMB/Windows Admin Shares, Service Execution
- **ATT&CK ID:** T1021.002, T1569.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=7045 (provider="Service Control Manager" or event_
↪ source="Service Control Manager") (service="BTOBTO" OR path IN ["*.bat & del *", "*_
↪ _output 2^>^&1 >*"]) -user IN EXCLUDED_USERS
```

2.410 LP_SolarisLDAP Group Remove from LDAP Detected

- **Trigger Condition:** The removal of a group from LDAP is detected.
- **ATT&CK Category:** Credential Access, Persistence, Impact, Defense Evasion
- **ATT&CK Tag:** Account Manipulation, Account Access Removal
- **ATT&CK ID:** T1098, T1531
- **Minimum Log Source Requirement:** Solaris LDAP
- **Query:**

```
norm_id=SolarisLDAP label=Remove label=Member label=Management label=Group
```

2.411 LP_SolarisLDAP Password Spraying Attack Detected

- **Trigger Condition:** Multiple login or authentication fail attempts on a SOLARISLDAP by various users are detected. Adversaries can use a list of commonly used passwords against different accounts to attempt to obtain valid account credentials.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Solaris LDAP
- **Query:**

```
norm_id=SolarisLDAP label=User (label=Login OR label=Authentication) label=Fail | chart
↪ distinct_count(user) as UserCount, distinct_list(user) as Users | search UserCount > 5
```

2.412 LP_SolarisLDAP Possible Bruteforce Attack Detected

- **Trigger Condition:** Five failed Solaris LDAP user login or authentication attempts from a user are detected. Adversaries can perform brute force attacks to find the valid credentials of a user. The fail count number needs to be adjusted to the environment.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Brute Force
- **ATT&CK ID:** T1110
- **Minimum Log Source Requirement:** Solaris LDAP
- **Query:**

```
norm_id=SolarisLDAP label=User (label=Login OR label=Authentication) label=Fail | chart
↪ count() as cnt by user | search cnt > 5
```

2.413 LP_SolarisLDAP Successful Bruteforce Attack Detected

- **Trigger Condition:** Successful login event after multiple failed login counts is detected as defined in the query. Adversaries perform brute-force attacks to discover and validate credentials and gain access to the system and network. The fail count needs to be adjusted according to the environment.
- **ATT&CK Category:** Initial Access, Persistence, Privilege Escalation, Defense Evasion, Credential Access
- **ATT&CK Tag:** Valid Accounts, Account Manipulation, Brute Force, Forced Authentication
- **ATT&CK ID:** T1078, T1098, T1110, T1187
- **Minimum Log Source Requirement:** Solaris LDAP
- **Query:**

```
[norm_id=SolarisLDAP label=User (label=Login OR label=Authentication) label=Fail |
↪ chart count() as cnt by user | search cnt > 10 ] as s1 followed by [norm_id=SolarisLDAP
↪ label=User (label=Login OR label=Authentication) label=Successful] as s2 on s1.user =
↪ s2.user
```

2.414 LP_SolarisLDAP User Account Lockout Detected

- **Trigger Condition:** A locked user account is detected.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts, Abuse Elevation Control Mechanism, Bypass User Access Control
- **ATT&CK ID:** T1078, T1548
- **Minimum Log Source Requirement:** Solaris LDAP
- **Query:**

```
norm_id=SolarisLDAP label=User label=Account label=Lock
```

2.415 LP_Sophos XG Firewall - Inbound Attack Detected by IDP

- **Trigger Condition:** An inbound attack defined in IDP policy is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Network Denial of Service, Endpoint Denial of Service
- **ATT&CK ID:** T1498, T1499
- **Minimum Log Source Requirement:** Sophos XG Firewall
- **Query:**

```
norm_id=SophosXGFirewall label=Attack label=Detect label=IDP destination_address=* -
↪ source_address in HOMENET | process geoip(source_address) as country
```

2.416 LP_Sophos XG Firewall - Outbound Attack Detected by IDP

- **Trigger Condition:** An outbound attack defined in IDP policy is detected.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Network Denial of Service, Endpoint Denial of Service
- **ATT&CK ID:** T1498, T1499
- **Minimum Log Source Requirement:** Sophos XG Firewall
- **Query:**

```
norm_id=SophosXGFirewall label=Attack label=Detect label=IDP destination_address=* -
↪ destination_address in HOMENET | process geoip(destination_address) as country
```

2.417 LP_SophosUTM Policy Violation

- **Trigger Condition:** Different policy violation from a source is detected. For this alert to work, the following list must be updated;
 - EXTREMIST_CONTENT, for example, weapons.

- CONCERNED _CONTENT, for example, alcohol, tobacco, gambling, and so on.
- CRIMINAL _CONTENT, for example, hacking, drugs, and so on.
- VULNERABLE _CONTENT, for example, abuse, and so on.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation, Credential Access
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Access Control, Group Policy Modification, Exploitation for Credential Access, Exploitation for Privilege Escalation
- **ATT&CK ID:** T1548, T1484, T1212, T1068
- **Minimum Log Source Requirement:** Sophos UTM
- **Query:**

```
norm_id=SophosUTM category_name=* source_address=* | chart count(category_name
↪ IN EXTREMIST_CONTENT) as Extremist, count(category_name IN CONCERNED_
↪ CONTENT) as Concerning, count(category_name IN CRIMINAL_CONTENT) as Criminal,
↪ count(category_name IN VULNERABLE_CONTENT) as Vulnerable by source_address,
↪ user | chart sum(Extremist+Concerning+Criminal+Vulnerable) as Violation by Extremist,
↪ Concerning, Criminal, Vulnerable, source_address,
user order by Violation | search Violation>1
```

2.418 LP_SSHD Connection Denied

- **Trigger Condition:** Ten denied connections are detected from the same source.
- **ATT&CK Category:** Lateral Movement, Command and Control, Impact
- **ATT&CK Tag:** Remote Services, Commonly Used Port, Network Denial of Service, Endpoint Denial of Service
- **ATT&CK ID:** T1021, T1498, T1499
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
[10 norm_id=Unix label=Connection label=Deny having same source_address within 10
↪ seconds]
```

2.419 LP_Stealthy Scheduled Task Creation via VBA Macro Detected

- **Trigger Condition:** Office products such as Word, Excel, PowerPoint and Outlook.exe load taskschd.dll.
- **ATT&CK Category:** Execution, Persistence, Privilege Escalation
- **ATT&CK Tag:** Scheduled Task/Job, Scheduled Task
- **ATT&CK ID:** T1053, T1053.005
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 image="*\taskschd.dll" "process" IN ["*\winword.
↪exe", "\excel.exe", "\powerpnt.exe", "\outlook.exe"]
```

2.420 LP_Sticky Key Like Backdoor Usage Detected

- **Trigger Condition:** Usage and installation of a backdoor that used an option to register a malicious debugger for built-in tools accessible on the login screen. Adversaries may use a sticky key-like backdoor to gain unauthorized access to a system by pressing a specific combination of keys. This can allow them to execute malicious code or bypass security controls.
- **ATT&CK Category:** Privilege Escalation, Persistence
- **ATT&CK Tag:** Event Triggered Execution, Accessibility Features
- **ATT&CK ID:** T1546, T1546.008
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(
label=Registry label=Set label=Value event_type="SetValue"
target_object IN ["*\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Image File
↪Execution Options\sethc.exe\Debugger",
"\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Image File Execution
↪Options\utilman.exe\Debugger",
"\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Image File Execution Options\osk.
↪exe\Debugger",
```

(continues on next page)

(continued from previous page)

```

"*\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Image File Execution?
↳ Options\\Magnify.exe\\Debugger",
"*\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Image File Execution?
↳ Options\\Narrator.exe\\Debugger",
"*\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Image File Execution?
↳ Options\\DisplaySwitch.exe\\Debugger",
"*\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Image File Execution?
↳ Options\\atbroker.exe\\Debugger",
"*\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Image File Execution?
↳ Options\\HelpPane.exe\\Debugger"]
)
OR
(
label="Process" label=Create
command IN ["*\\CurrentVersion\\Image File Execution Options\\sethc.exe*",
"*\\CurrentVersion\\Image File Execution Options\\utilman.exe*",
"*\\CurrentVersion\\Image File Execution Options\\osk.exe*",
"*\\CurrentVersion\\Image File Execution Options\\magnify.exe*",
"*\\CurrentVersion\\Image File Execution Options\\narrator.exe*",
"*\\CurrentVersion\\Image File Execution Options\\displayswitch.exe*",
"*\\CurrentVersion\\Image File Execution Options\\atbroker.exe*",
"*\\CurrentVersion\\Image File Execution Options\\HelpPane.exe*"]
)
OR
(
label="Process" label=Create
"process" IN ["*\\cmd.exe", "*\\cscript.exe", "*\\mshta.exe", "*\\powershell.exe", "*\\pwsh.exe",
↳ "*\\regsvr32.exe", "*\\rundll32.exe", "*\\wscript.exe", "*\\wt.exe"]
command IN ["*sethc.exe*", "*utilman.exe*", "*osk.exe*", "*Magnify.exe*", "*Narrator.
↳ exe*", "*DisplaySwitch.exe*"]
)

```

2.421 LP_Stop Windows Service Detected

- **Trigger Condition:** Windows Service stops.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Service Stop
- **ATT&CK ID:** T1489
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image IN ["*\\sc.exe", "*\\net.exe", "*\\net1.exe"]
↪ command="*stop*" -user IN EXCLUDED_USERS
```

2.422 LP_Successful Lateral Movement to Administrator via Pass the Hash using Mimikatz Detected

- **Trigger Condition:** Lateral Movement is successful in compromising the admin account via Pass the Hash method.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Use Alternate Authentication Material, Pass the Hash
- **ATT&CK ID:** T1550, T1550.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
[norm_id=WinServer event_id=4624 logon_type=9 logon_process=seclogon
↪ package=Negotiate label=User label=Login label=Successful -user IN EXCLUDED_
↪ USERS] as s1
followed by [norm_id=WinServer event_id=4672 label=Privilege label=Assign] as s2 on s1.
↪ user=s2.user | rename s1.log_ts
as log_ts, s1.user as user, s1.domain as domain, s1.user_id as user_id, s1.host as host
```

2.423 LP_Successful Overpass the Hash Attempt

- **Trigger Condition:** Successful Overpass-the-Hash Attempt is detected. This attack involves exploiting both pass-the-hash and pass-the-ticket techniques. Adversaries use this technique when obtaining a cleartext password is impossible, but Kerberos authentication can be used to access the target system.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Pass the Hash
- **ATT&CK ID:** T1550.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4624 logon_type="9" logon_process="seclogo" package=
↪ "Negotiate" -user IN EXCLUDED_USERS
```

2.424 LP_Suspect Svchost Memory Access

- **Trigger Condition:** Suspicious access to svchost process memory such as that used by Invoke-Phantom, to kill the WinRM Windows event logging service. The svchost.exe process is a legitimate system that hosts multiple Windows services. Adversaries may use this process to execute malicious code or gain unauthorized system access.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=10 "process"="*\windows\system32\svchost.exe"
↪ access="0x1f3fff" call_trace="*unknown*" -user IN EXCLUDED_USERS
```

2.425 LP_Suspicious Access to Sensitive File Extensions

- **Trigger Condition:** Sensitive file extensions are detected.
- **ATT&CK Category:** Collection
- **ATT&CK Tag:** Data Staged
- **ATT&CK ID:** T1074
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 relative_target IN ["*.pst", "*.ost", "*.msg", "*.nst", "*.
↪ oab", "*.edb", "*.nsf",
"*.bak", "*.dmp", "*.kirbi", "*\groups.xml", "*.rdp"] -user IN EXCLUDED_USERS
```

2.426 LP_Suspicious Calculator Usage Detected

- **Trigger Condition:** The use of calc.exe with command line parameters or in a suspicious directory, which is likely caused by some PoC or detection evasion, is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 (command="*\calc.exe*" OR (event_id=1 image=
↪ " *\calc.exe" -image="*\Windows\Sys*")) -user IN EXCLUDED_USERS
```

2.427 LP_Suspicious Call by Ordinal Detected

- **Trigger Condition:** Suspicious execution of exported functions in DLLs through RunDLL32 via ordinal (16-bit integer).
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rundll32
- **ATT&CK ID:** T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\rundll32.exe" OR file="rundll32.exe")↗
↪ command IN ["*,#*", "*, #*", "*.dll #*", "*.ocx #*"] -command="*EDGEHTML.DLL*#141*
↪ " -(parent_process IN ["*\Msbuild\Current\Bin\*", " *\VC\Tools\MSVC\*", " *\Tracker.exe
↪ "] command IN ["*\FileTracker32.dll,#1*", ' *\FileTracker32.dll",#1*', " *\FileTracker64.dll,
↪ #1*", ' *\FileTracker64.dll",#1*])
```

2.428 LP_Suspicious Code Page Switch Detected

- **Trigger Condition:** Switching of code pages in a command line or batch scripts to a rare language. Adversaries may use a rare code page to evade detection or hide their activities.
- **ATT&CK Category:** Defense Evasion, Discovery
- **ATT&CK Tag:** Masquerading, System Language Discovery
- **ATT&CK ID:** T1036, T1614.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\chcp.com" command IN ["* 936", "* 1258"] -
↪ user IN EXCLUDED_USERS
```

2.429 LP_Suspicious Compression Tool Parameters

- **Trigger Condition:** Suspicious command line arguments of standard data compression tools such as 7z and Rar are detected. Adversaries can utilize these techniques to compress data to exfiltrate those data.
- **ATT&CK Category:** Collection, Exfiltration
- **ATT&CK Tag:** Automated Exfiltration, Archive Collected Data
- **ATT&CK ID:** T1020, T1560
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ( ( (file IN ["7z.exe", "WinRAR.exe"] OR description=
↪ "Command line RAR") OR "process" IN ["*\7z.exe", "*\rar.exe"]) command IN ["* -p*",
↪ "* -ta*", "* -tb*", "* -sdel*", "* -dw*", "* -hp*"] -(parent_process="*\Program Files*\
↪ OR parent_process="*\Program Files (x86)*") ) OR ("process"="*\rar.exe" command=
↪ "* a *")
```

2.430 LP_Suspicious Control Panel DLL Load Detected

- **Trigger Condition:** Suspicious execution of Rundll32 from *control.exe*. Adversaries may use this technique to proxy execute their malicious applications through signed binary without being noticed by the security controls.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rundll32
- **ATT&CK ID:** T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ( parent_process="*\System32\control.exe" ("process"=
↳ "\rundll32.exe" OR file="RUNDLL32.EXE") -command="*Shell32.dll*" )
```

2.431 LP_Suspicious Csc Source File Folder Detected

- **Trigger Condition:** Suspicious execution of *csc.exe* that uses a source in a suspicious folder like AppData. Adversaries often download their source code and compile it in the victim's computer using the functionality of *csc.exe*.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Compile After Delivery, Visual Basic, JavaScript, Mshta
- **ATT&CK ID:** T1027.004, T1059.005, T1059.007, T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\csc.exe" OR file="csc.exe")
(
(command IN ["*\Perflogs\*", ".*\Users\Public\*", ".*\AppData\Local\Temp\*",
↳ ".*\Temporary Internet", ".*\Windows\Temp\*"] )
OR
(parent_command IN ["*\cscript.exe", ".*\excel.exe", ".*\mshta.exe", ".*\onenote.exe",
↳ ".*\outlook.exe", ".*\powerpnt.exe", ".*\winword.exe", ".*\wscript.exe"] )
OR
(parent_command IN ["*\powershell.exe", ".*\pwsh.exe"] parent_command IN ["*-
↳ Encoded*", ".*FromBase64String*"])
```

(continues on next page)

(continued from previous page)

```

OR
(command="*\Users\*" command IN ["*\Favorites\*", ".*\Favourites\*", ".*\Contacts\*",
↪ ".*\Pictures\*"])
OR
(command IN ["*ProgramData\*", "%LocalAppData%\*", "%AppData%\*",
↪ ".*\AppData\Local\*", ".*\AppData\LocalLow\*", ".*\Roaming\*"])
)
(
- (parent_process IN ["C:\Program Files (x86)\*", "C:\Program Files\*"] OR parent_process=
↪ "C:\Windows\System32\sdiagnhost.exe" OR parent_process=
↪ "C:\Windows\System32\inetsrv\w3wp.exe")
)
(
- (parent_process IN ["C:\ProgramData\chocolatey\choco.exe",
↪ "C:\ProgramData\chocolatey\tools\shimgen.exe"] OR parent_command=
↪ ".*\ProgramData\Microsoft\Windows Defender Advanced Threat Protection*"
OR parent_command IN [
↪ ".*JwB7ACIAZgBhAGkAbABIAGQAlgA6AHQAcbB1AGUALAAiAG0AcwBnACIAOgAiAEEAbgBzAGkAYg
↪ ",
↪ ".*cAewAiAGYAYQBpAGwAZQBkACIAOgB0AHlAdQBACwAlgBtAHMAZwAiADoAlgBBAG4AcwBpAGIA
↪ ",
↪ ".*nAHsAlgBmAGEAaQBsAGUAZAAiADoAdABYAHUAZQAsACIAbQBzAGcAlgA6ACIAQQBuAHMAaQBE
↪ "])
)

```

2.432 LP_Suspicious Debugger Registration Detected

- **Trigger Condition:** Registration of a debugger for a program available in the logon screen (sticky key backdoor) is detected.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Accessibility Features
- **ATT&CK ID:** T1546, T1546.008
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```

label="process" label=create command IN [".*\CurrentVersion\Image File Execution
↪ Options\sethc.exe*", ".*\CurrentVersion\Image File Execution Options\utilman.exe*",
↪ ".*\CurrentVersion\Image File Execution Options\osk.exe*", ".*\CurrentVersion\Image
↪ File Execution Options\magnify.exe*", ".*\CurrentVersion\Image File Execution
↪ Options\narrator.exe*", ".*\CurrentVersion\Image File Execution Options\displayswitch.
↪ exe*", ".*\CurrentVersion\Image File Execution Options\atbroker.exe*"]

```

(continues on next page)

(continued from previous page)

2.433 LP_Suspicious Double Extension Detected

- **Trigger Condition:** Double extension of a file is detected. Adversaries use double extensions to mask the real file extension, evade detection by security software, or bypass whitelisting.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Spearphishing Attachment
- **ATT&CK ID:** T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process" IN [ "*.doc.exe", "*.docx.exe", "*.doc.lnk", "*.docx.lnk", "*.xls.lnk", "xlsx.lnk", "*.ppt.lnk", "*.pptx.lnk", "*.rtf.lnk", "*.pdf.lnk", "*.txt.lnk", "*.doc.js", "*.docx.js", "*.xls.js", "*.xlsx.js", "*.ppt.js", "*.pptx.js", "*.rtf.js", "*.pdf.js", "*.txt.js", "*.tmp.bat", "*.xls.exe", "*.bat.exe", "*.xlsx.exe", "*.ppt.exe", "*.pptx.exe", "*.rtf.exe", "*.pdf.exe", "*.bat.exe", "*.txt.exe", "*.exe", "*"_____.exe" ]) (command IN [ "*.doc.exe*", "*.docx.exe*", "*.doc.lnk*", "*.docx.lnk*", "*.xls.lnk*", "xlsx.lnk*", "*.ppt.lnk*", "*.pptx.lnk*", "*.rtf.lnk*", "*.pdf.lnk*", "*.txt.lnk*", "*.doc.js*", "*.docx.js*", "*.xls.js*", "*.xlsx.js*", "*.ppt.js*", "*.pptx.js*", "*.rtf.js*", "*.pdf.js*", "*.txt.js*", "*.tmp.bat*", "*.xls.exe*", "*.bat.exe*", "*.xlsx.exe*", "*.ppt.exe*", "*.pptx.exe*", "*.rtf.exe*", "*.pdf.exe*", "*.bat.exe*", "*.txt.exe*", "*.exe*", "*"_____.exe*" ])
```

2.434 LP_Suspicious Driver Load from Temp

- **Trigger Condition:** Driver loaded from a temporary directory.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Windows Service
- **ATT&CK ID:** T1543.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=6 file="*\Temp\*" -user IN EXCLUDED_USERS
```

2.435 LP_Suspicious Eventlog Clear or Configuration Using Wevtutil Detected

- **Trigger Condition:** Clearing or configuration of eventlogs using wevtutil, PowerShell and wmic. Adversaries use this technique to delete the logs and hide their traces.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Clear Windows Event Logs, Disable Windows Event Logging
- **ATT&CK ID:** T1070.001, T1562.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ( ("process" IN ["*\powershell.exe", "*\pwsh.exe"]
↪ command IN ["*Clear-EventLog*", "*Remove-EventLog*", "*Limit-EventLog*", "*Clear-
↪ WinEvent*"]) OR ("process"="*\wmic.exe" command="* ClearEventLog *")) OR (
↪ "process"="*\wevtutil.exe" command IN ["*clear-log*", "* cl *", "*set-log*", "* sl *",
↪ "*|fn: ") ) -(parent_process IN ["C:\Windows\SysWOW64\msiexec.exe",
↪ "C:\Windows\System32\msiexec.exe"] command="* sl *")
```

2.436 LP_Suspicious Execution from Outlook

- **Trigger Condition:** Usage of the EnableUnsafeClientMailRules registry value for script execution from Outlook.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Command and Scripting Interpreter, Indirect Command Execution
- **ATT&CK ID:** T1059, T1202
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ( command="*EnableUnsafeClientMailRules*" OR (parent_
↪ process="*\outlook.exe" (command="\\*\*.exe" OR "process"="\\*\*.exe"))) )
```

2.437 LP_Suspicious GUP Usage Detected

- **Trigger Condition:** Execution of the Notepad++ updater in a suspicious directory used in DLL side-loading attacks. Adversaries may abuse this weakness to bypass security controls by hiding their activities inside legitimate processes.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation
- **ATT&CK Tag:** DLL Side-Loading
- **ATT&CK ID:** T1574.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\GUP.exe" -(("process" IN ["*\Program
Files\Notepad++\updater\GUP.exe", ".*\Program Files (x86)\Notepad++\updater\GUP.
exe"]) OR ("process"="*\Users\*" "process" IN [
"*\AppData\Local\Notepad++\updater\GUP.exe",
"*\AppData\Roaming\Notepad++\updater\GUP.exe"])))
```

2.438 LP_Suspicious HWP Sub Processes Detected

- **Trigger Condition:** Suspicious Hangul Word Processor (Hanword) sub-processes indicating exploitation. Adversaries may inject malicious processes into Hanword for their malicious purposes.
- **ATT&CK Category:** Execution, Initial Access
- **ATT&CK Tag:** Windows Command Shell, Spearphishing Attachment
- **ATT&CK ID:** T1059.003, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\Hwp.exe" "process"="*\gbb.exe"
```

2.439 LP_Suspicious Kerberos RC4 Ticket Encryption

- **Trigger Condition:** Service ticket requests using the RC4 encryption type. Adversaries can exploit RC4's weaknesses to crack passwords much faster, potentially compromising accounts.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Kerberoasting
- **ATT&CK ID:** T1558.003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4769 ticket_option="0x40810000" Encryption_type="0x17" -
↪service="*$"
```

2.440 LP_Suspicious Named Pipes Detected

- **Trigger Condition:** Suspicious named pipes commonly used by threat actors are detected.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation, Lateral Movement
- **ATT&CK Tag:** Process Injection, Lateral Tool Transfer
- **ATT&CK ID:** T1055, T1570
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id IN ["17", "18"] pipe IN ["\isapi_http", "\isapi_dg",
↪"\isapi_dg2", "\sdlrpc", "\ahexec", "\winsession", "\lsassw",
↪"\46a676ab7f179e511e30dd2dc41bd388", "\9f81f59bc58452127884ce513865ed20",
↪"\e710f28d59aa529d6792ca6ff0ca1b34", "\rpchlp_3", "\NamePipe_MoreWindows",
↪"\pcheap_reuse", "\msagent_", "\gruntsvc", "\PSEXESVC*",
↪"\PowerShellISEPipeName_", "\csexec", "\paexec", "\remcom", "\lsadump",
↪"\cachedump", "\wceservicepipe", "\psexec", "\mojo.5688.8052.183894939787088877",
↪"\mojo.5688.8052.35780273329370473", "\mypipe-f", "\mypipe-h", "\ntsvcs_",
↪"\scerpc_", "\DserNamePipe", "\srvsvc_", "\status_", "\MSSE-", "\postex_", "\spoolss_
↪", "\winsock", "\win_svc", "\dce_86"]
```

2.441 LP_Suspicious Outbound Kerberos Connection

- **Trigger Condition:** Suspicious outbound network activity via kerberos is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Steal or Forge Kerberos Tickets, Kerberoasting
- **ATT&CK ID:** T1558, T1558.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
norm_id=Windows* (event_id=3 OR event_id=5156) destination_port="88" is_initiated=
↪ "true" - "process" IN ["C:\Windows\System32\lsass.exe", "C:\Program
↪ Files\Google\Chrome\Application\chrome.exe", "C:\Program Files\Mozilla
↪ Firefox\firefox.exe"] -user IN EXCLUDED_USERS
```

2.442 LP_Suspicious Outbound RDP Connections Detected

- **Trigger Condition:** Non-Standard tools connecting to TCP port 3389 indicating possible lateral movement.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Exploitation of Remote Services
- **ATT&CK ID:** T1210
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 destination_port="3389" initiated="true" - "process
↪ " IN ["*\mstsc.exe", ".*\RTSApp.exe", ".*\RTS2App.exe", ".*\RDCMan.exe", ".*\ws_
↪ TunnelService.exe", ".*\RSSensor.exe", ".*\RemoteDesktopManagerFree.exe",
↪ ".*\RemoteDesktopManager.exe", ".*\RemoteDesktopManager64.exe", ".*\mRemoteNG.
↪ exe", ".*\mRemote.exe", ".*\Terminals.exe", ".*\spiceworks-finder.exe", ".*\FSDiscovery.
↪ exe", ".*\FSAssessment.exe", ".*\MobaRTE.exe", ".*\chrome.exe", ".*\thor.exe",
↪ ".*\thor64.exe"] -user IN EXCLUDED_USERS
```

2.443 LP_Suspicious Parent of Csc Detected

- **Trigger Condition:** Suspicious parent of csc.exe is detected. It is an executable file part of the Microsoft .NET framework.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Compile After Delivery, Visual Basic, JavaScript, Mshta
- **ATT&CK ID:** T1027.004, T1059.005, T1059.007, T1218.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\csc.exe*" parent_process IN ["*\wscript.exe",
↪ ".*\cscript.exe", ".*\mshta.exe"] -user IN EXCLUDED_USERS
```

2.444 LP_Suspicious PowerShell Invocation Based on Parent Process

- **Trigger Condition:** Suspicious PowerShell invocations from interpreters or unusual programs like wscript or IIS worker process (w3wp.exe). Adversaries can add other suspicious parent processes to increase visibility.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create parent_process IN ["*\mshta.exe", ".*\wscript.exe",
↪ ".*\cscript.exe", ".*\rundll32.exe", ".*\regsvr32.exe", ".*\services.exe", ".*\winword.exe",
↪ ".*\wmiprvse.exe", ".*\powerpnt.exe", ".*\excel.exe", ".*\msaccess.exe", ".*\mshpub.exe",
↪ ".*\visio.exe", ".*\outlook.exe", ".*\amigo.exe", ".*\chrome.exe", ".*\firefox.exe",
↪ ".*\iexplore.exe", ".*\microsoftedgecp.exe", ".*\microsoftedge.exe", ".*\browser.exe",
↪ ".*\vivaldi.exe", ".*\safari.exe", ".*\sqlagent.exe", ".*\sqlserver.exe", ".*\sqlservr.exe",
↪ ".*\w3wp.exe", ".*\httpd.exe", ".*\nginx.exe", ".*\php-cgi.exe", ".*\jbossvc.exe",
↪ ".*\MicrosoftEdgeSH.exe", ".*\tomcat*"] "process"=".*\powershell.exe" -path=".*\Health[?]
↪ Service State\*"
```

2.445 LP_Suspicious PowerShell Parameter Substring Detected

- **Trigger Condition:** Suspicious PowerShell invocation with a parameter substring. PowerShell is a commandline shell and a scripting language for automating and managing tasks.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN ["*\powershell.exe", ".*\pwsh.exe"] command
↪ IN ["* -wi*h*", "* -nop*", "* -nonin*", "* -ec*", "* -en*", "* -executionp*", "* -e*"]
↪ bypass*", "* -sta *", ".*FromBase64String*"]
```

2.446 LP_Suspicious Process Start Locations Detected

- **Trigger Condition:** Executing suspicious processes from unusual locations like the Recycle bin or Fonts folder. Adversaries run malicious scripts or applications from unusual locations like temporary or recycle bin folders.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process" IN ["*:\RECYCLER\*",
↪ ".*:\SystemVolumeInformation\*", "C:\Windows\Tasks\*", "C:\Windows\debug\*",
↪ "C:\Windows\fonts\*", "C:\Windows\help\*", "C:\Windows\drivers\*",
↪ "C:\Windows\addins\*", "C:\Windows\cursors\*", "C:\Windows\system32\tasks\*",
↪ ".*\Windows\IME\*", "C:\Perflogs\*"] -user IN EXCLUDED_USERS
```

2.447 LP_Suspicious Program Location with Network Connections

- **Trigger Condition:** Programs with network connections executed in suspicious file system locations.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=3 "process" IN ["*\\$Recycle.bin", "*\\Users\\All Users\\*",
↪ ", "*\\Users\\Default\\*", "*\\Users\\Public\\*", "*\\Users\\Contacts\\*", "*\\Users\\Searches\\*",
↪ "C:\\Perflogs\\*", "*\\config\\systemprofile\\*", "*\\Windows\\Fonts\\*", "*\\Windows\\IME\\*",
↪ "*\\Windows\\addins\\*"] -user IN EXCLUDED_USERS
```

2.448 LP_Suspicious PsExec Execution Detected

- **Trigger Condition:** Execution of psexec or paexec with the renamed service name. This rule helps filter out the noise if psexec is used for legitimate purposes or if an attacker uses a different psexec client other than sysinternal one.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Lateral Tool Transfer
- **ATT&CK ID:** T1570
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 share_name="IPC$" relative_target IN ["*-stdin", "*-
↪ stdout", "*-stderr"] -relative_target="PSEXESVC*" -user IN EXCLUDED_USERS
```

2.449 LP_Suspicious RDP Redirect Using TSCON Detected

- **Trigger Condition:** Suspicious Remote Desktop Protocol (RDP) session redirect using `tscon.exe`. Adversaries who have appropriate privileges can use this technique to gain access to other users' existing RDP sessions.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services, Remote Desktop Protocol
- **ATT&CK ID:** T1021, T1021.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command="*tscon*" command="*rdp-tcp*"
```

2.450 LP_Suspicious Remote Thread Created

- **Trigger Condition:** Suspicious processes like `word.exe` or `outlook.exe` create remote threads on other processes. Adversaries use this technique to inject code and hide in different processes.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Process Injection
- **ATT&CK ID:** T1055
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=8 "process" IN ["*\\bash.exe", "*\\cvtres.exe",
↪ "*\\defrag.exe", "*\\dnx.exe", "*\\esentutl.exe", "*\\excel.exe", "*\\expand.exe",
↪ "*\\explorer.exe", "*\\find.exe", "*\\findstr.exe", "*\\forfiles.exe", "*\\git.exe", "*\\gpupdate.
↪ exe", "*\\hh.exe", "*\\iexplore.exe", "*\\installutil.exe", "*\\lync.exe", "*\\makecab.exe",
↪ "*\\mDNSResponder.exe", "*\\monitoringhost.exe", "*\\msbuild.exe", "*\\mshta.exe",
↪ "*\\msiexec.exe", "*\\mspaint.exe", "*\\outlook.exe", "*\\ping.exe", "*\\powerpnt.exe",
↪ "*\\powershell.exe", "*\\provtool.exe", "*\\python.exe", "*\\regsvr32.exe", "*\\robocopy.
↪ exe", "*\\runonce.exe", "*\\sapcimc.exe", "*\\schtasks.exe", "*\\smartscreen.exe",
↪ "*\\spoolsv.exe", "*\\tstheme.exe", "*\\userinit.exe", "*\\vssadmin.exe", "*\\vssvc.exe",
↪ "*\\w3wp.exe", "*\\winlogon.exe", "*\\winscp.exe", "*\\wmic.exe", "*\\word.exe",
↪ "*\\wscript.exe"] - "process" = "*Visual Studio*" -user IN EXCLUDED_USERS
```

2.451 LP_Suspicious RUN Key from Download Detected

- **Trigger Condition:** Suspicious RUN keys created by software located in the Download or temporary Outlook/Internet Explorer directories that may signal malicious activity.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Registry Run Keys/Startup Folder
- **ATT&CK ID:** T1547, T1547.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 "process" IN ["*\Downloads\*", ".*\Temporary
↪Internet Files\Content.Outlook\*", ".*\Local Settings\Temporary Internet Files\*"] target_
↪object=".*\SOFTWARE\Microsoft\Windows\CurrentVersion\Run\*" -user IN EXCLUDED_
↪USERS
```

2.452 LP_Suspicious Rundll32 Activity Detected

- **Trigger Condition:** Suspicious processes related to the RunDLL32 binary based on its command-line arguments. Adversaries may abuse RunDLL32 to proxy code executions and avoid triggering security tools that may not monitor the execution of the `rundll32.exe` process because of allowlists or false positives from normal operations.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rundll32
- **ATT&CK ID:** T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create ("process"=".*\rundll32.exe" OR file="rundll32.exe")
↪((command=".*javascript:.*" command=".*.RegisterXLL*")
OR (command=".*url.dll*" (command=".*OpenURL*" OR command=
↪".*FileProtocolHandler*"))
OR (command=".*zipfldr.dll*" command=".*RouteTheCall*"))
```

(continues on next page)

(continued from previous page)

```

OR (command="*shell32.dll*" (command="*Control_RunDLL*" OR command=
↳ "*ShellExec_RunDLL*"))
OR (command="*mshtml.dll*" command="*PrintHTML*")
OR (command="*advpack.dll*" (command="*LaunchINFSection*" OR command=
↳ "*RegisterOCX*"))
OR ((command="*ieframe.dll*" OR command="*shdocvw.dll*") command="*OpenURL*")
OR (command="*syssetup.dll*" command="*SetupInfObjectInstallAction*")
OR (command="*setupapi.dll*" command="*InstallHinfSection*")
OR (command="*pcwutl.dll*" command="*LaunchApplication*")
OR (command="*dfshim.dll*" (command="*ShOpenVerbApplication*" OR command=
↳ "*ShOpenVerbShortcut*"))
OR ((command="*scrobj.dll*" command="*GenerateTypeLib*") OR (command=
↳ "*shimgvw.dll*" command="*ImageView_Fullscreen*") command="*http*")
OR (command="*comsvcs.dll*" command="*MiniDump*") OR (command IN [
↳ "*C:\Perflogs*", "*C:\ProgramData\*", "*AppData\Local\Temp*", "*C:\Users\Public*"])
-((command="*shell32.dll,Control_RunDLL desk.cpl,screensaver,@screensaver*")
OR (parent_process="C:\Windows\System32\control.exe" command="*.cpl*")
(parent_command=* parent_command="*.cpl*" command="*Shell32.dll*" command=
↳ "*Control_RunDLL*")
OR (command="*rundll32*Shell32.dll,Control_RunDLL*C:\Windows\System32\*")) | chart
↳ count() by command

```

2.453 LP_Suspicious Scripting in a WMI Consumer

- **Trigger Condition:** Suspicious scripting in the WMI Event Consumers.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```

norm_id=WindowsSysmon event_id=20 destination IN ["*new-object .webclient).
↳ downloadstring(*", "*new-object .webclient).downloadfile(*", "*new-object net.
↳ webclient).downloadstring(*", "*new-object net.webclient).downloadfile(*", "* iex(*",
↳ "*WScript.shell*", "* -nop *", "* -nopprofile *", "* -decode *", "* -enc *" ] -user IN
↳ EXCLUDED_USERS

```

2.454 LP_Suspicious Service Path Modification Detected

- **Trigger Condition:** Modification of service path to *powershell/cmd* is detected.
- **ATT&CK Category:** Persistence, Privilege Escalation
- **ATT&CK Tag:** Windows Service
- **ATT&CK ID:** T1543.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\sc.exe" command="*config*" command=
↪ "*binpath*" command In ["*powershell*", "*cmd*", "*mshta*", "*wscript*", "*cscript*",
↪ "*rundll32*", "*svchost*", "*dllhost*", "*cmd.exe /c*", "*cmd.exe /k*", "*cmd.exe /r*",
↪ "*cmd /c*", "*cmd /k*", "*cmd /r*", "*C:\Users\Public*", "*\Downloads\*",
↪ "*\Desktop\*", "*\Microsoft\Windows\Start Menu\Programs\Startup\*",
↪ "*C:\Windows\TEMP\*", "\AppData\Local\Temp"]
```

2.455 LP_Suspicious Svchost Process Detected

- **Trigger Condition:** Creation of a suspicious svchost process. Adversary attempt to hide their processes in plain sight by calling them the same name as some standard Windows processes.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Masquerading, Match Legitimate Name or Location, Process Injection
- **ATT&CK ID:** T1036, T1036.005, T1055
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\svchost.exe" -parent_process IN [
↪ "*\MsMpEng.exe", "*\Mrt.exe", "*\rpcnet.exe", "C:\Windows\System32\svchost.exe"] (-
↪ parent_process="*\services.exe" -command="* -k *") parent_process=* -user IN?
↪ EXCLUDED_USERS
```

2.456 LP_Suspicious TSCON Start

- **Trigger Condition:** Execution of tscon.exe process as local system. If tscon.exe run as system, adversaries can gain access to the currently logged-in session without credentials.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Remote Access Software
- **ATT&CK ID:** T1219
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create user IN ["SYSTEM", "*AUTHOR*", "*AUTOR*"] "process" =
↳ "*\tscon.exe" -user IN EXCLUDED_USERS
```

2.457 LP_Potential Suspicious Malware Callback Communication

- **Trigger Condition:** Programs connecting to a typical malware back connect ports based on statistical analysis from two different sandbox system databases are detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Non-Standard Port
- **ATT&CK ID:** T1571
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
destination_port IN ["100", "198", "200", "243", "473", "666", "700", "743", "777", "1443",
↳ "1515", "1777", "1817", "1904", "1960", "2443", "2448", "3360", "3675", "3939", "4040",
↳ "4433", "4438", "4443", "4444", "4455", "5445", "5552", "5649", "6625", "7210",
↳ "7777", "8143", "8843", "9631", "9943", "10101", "12102", "12103", "12322", "13145",
↳ "13394", "13504", "13505", "13506", "13507", "14102", "14103", "14154", "49180",
↳ "65520", "65535"] -image="*\Program Files*" -destination_address IN HOMENET -user
↳ IN EXCLUDED_USERS
```

2.458 LP_Suspicious CSharp or FSharp Interactive Console Execution

- **Trigger Condition:** Execution of CSharp or FSharp interactive console by scripting utilities like WScript or PowerShell. The alert warns you of attackers using the .NET framework for offensive purposes.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Trusted Developer Utilities Proxy Execution
- **ATT&CK ID:** T1127
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN ["*\csi.exe", "*\fsi.exe"] parent_process IN [
↪ ".*\cmd.exe", ".*\powershell.exe", ".*\wscript.exe", ".*\cscript.exe"] -user IN EXCLUDED_
↪ USERS
```

2.459 LP_Suspicious Userinit Child Process

- **Trigger Condition:** Suspicious process spawned by Userinit (User Initialization). Adversaries can leverage it to execute malicious payloads upon initialization to evade detection or maintain persistence in the system.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Process Injection
- **ATT&CK ID:** T1055
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label="Create" (parent_process=".*\userinit.exe" -(command=
↪ ".*\netlogon\*" OR ("process"=".*\explorer.exe" OR file="explorer.exe")) -user IN
↪ EXCLUDED_USERS
```

2.460 LP_Suspicious Windows ANONYMOUS LOGON Local Account Creation

- **Trigger Condition:** Creation of suspicious accounts similar to ANONYMOUS LOGON, like using additional spaces. This rule catches the exclusion of Logon Type 3 from ANONYMOUS LOGON accounts.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Create Account
- **ATT&CK ID:** T1136
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4720 user="*ANONYMOUS*LOGON*" -user IN EXCLUDED_USERS
```

2.461 LP_Suspicious WMI Execution Detected

- **Trigger Condition:** When WMI executing suspicious commands, including but not limited to AV product enumeration and remote process creation, are detected. WMIC.exe is a built-in Microsoft program that allows command-line access to the Windows Management Instrumentation. Adversaries can use this technique to create remote or local processes, get details about antivirus and firewalls, delete shadow copies and modify defender configurations.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Windows Management Instrumentation
- **ATT&CK ID:** T1047
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command="*process*" command="*call*" command="*create*" command IN ["*rundll32*", "*bitsadmin*", "*regsvr32*", "*cmd.exe /c*", "*cmd.exe /k*", "*cmd.exe /r*", "*cmd /c*", "*cmd /k*", "*cmd /r*", "*powershell*", "*pwsh*", "*certutil*", "*cscript*", "*wscript*", "*mshta*", "*\Users\Public\*", "*\Windows\Temp\*", "*\AppData\Local\*", "*%temp%*", "*%tmp%*"]
```

2.462 LP_SysKey Registry Keys Access

- **Trigger Condition:** Handle requests and access operations to specific registry keys to calculate the SysKey. Adversaries use a tool like Mimikatz or a script like Invoke-PowerDump to get the SysKey, decrypt Security Account Manager (SAM) database entries from the registry or hive, and get NTLM and LM hashes of local account passwords.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Query Registry
- **ATT&CK ID:** T1012
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN [4656, 4663] object_type="key" object_name IN ["*|sa\JD
↪", "*|sa\GBG", "*|sa\Skew1", "*|sa\Data"] -user IN EXCLUDED_USERS
```

2.463 LP_Sysmon Configuration Modification Detected

- **Trigger Condition:** Modification in Sysmon configuration.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Indicator Blocking
- **ATT&CK ID:** T1562, T1562.006
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label=Sysmon label=Config label=Change
```

2.464 LP_Sysmon Driver Unload Detected

- **Trigger Condition:** Unloading of Sysmon driver is detected. After error events are logged, logs will not be collected and parsed by Sysmon.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools

- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=255 id="DriverCommunication" -user IN EXCLUDED_
  ↳ USERS
```

2.465 LP_Sysmon Error Event Detected

- **Trigger Condition:** Sysmon error event is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=255
```

2.466 LP_System File Execution Location Anomaly Detected

- **Trigger Condition:** Windows program executable started in a suspicious folder.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process" IN ["*\\svchost.exe", "*\\rundll32.exe", "*\\services.
  ↳ exe", "*\\powershell.exe", "*\\powershell_ise.exe", "*\\pwsh.exe", "*\\regsvr32.exe",
  ↳ "*\\spoolsv.exe", "*\\lsass.exe", "*\\smss.exe", "*\\csrss.exe", "*\\conhost.exe", "*\\wininit.
  ↳ exe", "*\\sm.exe", "*\\winlogon.exe", "*\\explorer.exe", "*\\taskhost.exe", "*\\Taskmgr.exe",
  ↳ "*\\sihost.exe", "*\\RuntimeBroker.exe", "*\\smartscreen.exe", "*\\dllhost.exe",
  ↳ "*\\audiodg.exe", "*\\wlanext.exe", "*\\dashost.exe", "*\\schtasks.exe", "*\\cscript.exe",
  ↳ "*\\wscript.exe", "*\\wsl.exe", "*\\bitsadmin.exe", "*\\atbroker.exe", (*continues on next page)
  ↳ "*\\certutil.exe", "*\\certreq.exe", "*\\cmstp.exe", "*\\consent.exe", "*\\defrag.exe",
```

```
2.465. LP_Sysmon Error Event Detected 220
  ↳ "*\\dism.exe", "*\\dllhst3g.exe", "*\\eventvwr.exe", "*\\msiexec.exe", "*\\runonce.exe",
  ↳ "*\\winver.exe", "*\\logonui.exe", "*\\userinit.exe", "*\\dwm.exe", "*\\Lsalso.exe",
  ↳ "*\\ntoskrnl.exe", "*\\wsmprovhost.exe", "*\\dfrgui.exe"] - ("process" IN [
  ↳ "C:\\Windows\\System32\\*", "C:\\Windows\\SysWOW64\\*", "C:\\Windows\\WinSxS\\*",
  ↳ "*\\C:\\Program Files\\*", "C:\\Windows\\*", "C:\\Program Files\\*", "C:\\Program Files\\*",
```

(continued from previous page)

2.467 LP_System Service Discovery

- **Trigger Condition:** When an adversary attempts to get information about registered services is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** System Service Discovery
- **ATT&CK ID:** T1007
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN ["*\net.exe", "*\tasklist.exe", "*\sc.exe",
↪ "*\wmic.exe"] command IN ["*\net.exe* start*", "*\tasklist.exe* /SVC", "*\sc.exe* query*",
↪ "*\wmic.exe* service where*"]
```

2.468 LP_Tap Driver Installation Detected

- **Trigger Condition:** Installation of TAP software. It indicates possible preparation for data exfiltration using tunnelling techniques.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Alternative Protocol
- **ATT&CK ID:** T1048
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
((norm_id=WindowsSysmon event_id=6) OR (norm_id=WinServer (event_id=7045 OR↪
↪ event_id=4697))) (path="*\tap0901*" OR file="*\tap0901*") -user IN EXCLUDED_USERS
```

2.469 LP_Tasks Folder Evasion Detected

- **Trigger Condition:** Usage of the Windows tasks folder for evasion purposes. Adversaries can take advantage of this and load or influence any script hosts or any .NET application in tasks to load and execute a custom assembly into cscript, wscript, regsvr32, mshta, and eventvwr.
- **ATT&CK Category:** Persistence, Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Hijack Execution Flow, DLL Side-Loading
- **ATT&CK ID:** T1574, T1574.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WinServer event_id=4688 command IN ["*echo *", "*copy *", "*type *", "*file*",
↪ create new*"] command IN ["* C:\Windows\System32\Tasks\*", "* C:\Windows\SysWow64\Tasks\*"]
```

2.470 LP_Terminal Service Process Spawn Detected

- **Trigger Condition:** Process spawned by the terminal service server process. It can be used as an indicator for the exploitation of CVE-2019-0708.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Exploitation of Remote Services
- **ATT&CK ID:** T1210
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Process" label=Create parent_command="*\svchost.exe*termsvcs" - "process" IN [
↪ "\rdpclip.exe", "\Windows\System32\csrss.exe", "\Windows\System32\wininit.exe",
↪ "\Windows\System32\winlogon.exe"]
```

2.471 LP_Threat Intel Allowed Connections from Suspicious Sources

- **Trigger Condition:** A connection from suspicious sources are detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
norm_id=* label=Allow label=Connection -source_address in HOMENET destination_
↪ address in HOMENET | process ti(source_address) | rename et_ip_address as
↪ SourceAddress, cs_ip_address as SourceAddress, et_category as Category,
cs_category as Category, rf_ip_address as SourceAddress, rf_category as Category, et_
↪ score as Score, cs_score as Score, rf_score as Score, destination_port as Port | fields
↪ Category, SourceAddress, Score, Port
```

2.472 LP_Threat Intel Connections with Suspicious Domains

- **Trigger Condition:** A connection is established with a suspicious domain.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Firewall, IDS/IPS
- **Query:**

```
label=Connection (url=* OR domain=*) | process domain(url) as domain | process
↪ ti(domain) | rename et_category as Category, cs_category as Category, rf_category as
↪ Category, et_score as Score, cs_score as Score, rf_score as Score, rf_domain as Domain,
↪ et_domain as Domain, cs_domain as Domain
```

2.473 LP_Time-Stomping of Users Directory Files Detected

- **Trigger Condition:** Time-stomping of user directory file is detected. Sysmon can only detect a change of CreationTime and not LastWriteTime and LastAccessTime. Therefore, we recommend that whitelist legitimate noisy processes like browsers, slack, or teams to reduce false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indicator Removal on Host, Timestomp
- **ATT&CK ID:** T1070, T1070.006
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=2 path="C:\Users*" -source_image IN ["*iexplore.exe",
↳ "*cortana*", "*\StartMenuExperienceHost.exe", "C:\Windows\system32\cleanmgr.exe",
↳ "C:\Windows\Explorer.EXE", "*\LocalBridge.exe", "*\svchost.exe",
"*\RuntimeBroker.exe", "*\msedge.exe"]-path=
↳ "*\AppData\Roaming\Microsoft\Windows\Recent\CustomDestinations" -user IN ?
↳ EXCLUDED_USERS
```

2.474 LP_Transferring Files with Credential Data via Network Shares

- **Trigger Condition:** Transfer of sensitive files with credential data using a network share.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** LSASS Memory, Security Account Manager, NTDS
- **ATT&CK ID:** T1003.001, T1003.002, T1003.003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 relative_target IN ["*\mimidrv*", "*\lsass*",
↳ "*\windows\minidump\*", "*\hiberfil*", "*\sqlldmp*", "*\sam*", "*\ntds.dit*",
↳ "*\security*"] -user IN EXCLUDED_USERS
```

2.475 LP_TrendMicroDeepSecurity Virus Quarantined

- **Trigger Condition:** A virus-infected file is quarantined.
- **ATT&CK Category:** Defense Evasion, Discovery
- **ATT&CK Tag:** Obfuscated Files or Information, Indicator Removal from Tools, Network Service Scanning
- **ATT&CK ID:** T1027, T1027.005, T1046
- **Minimum Log Source Requirement:** Trend Micro Deep Security
- **Query:**

```
norm_id=TrendMicroDeepSecurity label=Virus OR label=Malware label=File
↪ label=Quarantine
```

2.476 LP_UAC Bypass via Event Viewer Detected

- **Trigger Condition:** Usage of eventvwr.exe to bypass UAC.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Access Control
- **ATT&CK ID:** T1548, T1548.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label="Process" label=Create parent_process="*\eventvwr.exe" - "process"="*\mmc.exe
↪") OR (norm_id = WindowsSysmon event_id=13 target_object=
↪ "HKCU*\mscfile\shell\open\command*")
```

2.477 LP_Unix Possible Bruteforce Attack

- **Trigger Condition:** An account is not present but is used repeatedly to login. This may be a brute force attack by a bot, malware, or threat agent.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Brute Force

- **ATT&CK ID:** T1110
- **Minimum Log Source Requirement:** Unix
- **Query:**

```
norm_id=Unix ((label=Account label=Absent) OR (label=User label=Authentication
↪label=Fail)) user=* | chart count() as cnt by user | search cnt>10
```

2.478 LP_Unix User Deleted

- **Trigger Condition:** Deletion of a user account.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Account Access Removal
- **ATT&CK ID:** T1531
- **Minimum Log Source Requirement:** Unix
- **Query:**

```
norm_id=Unix label=User label=Account label=Management label=Delete label=Remove
↪user=*
```

2.479 LP_Unsigned Driver Loading Detected

- **Trigger Condition:** Loading of an unsigned driver.
- **ATT&CK Category:** Privilege Escalation, Persistence
- **ATT&CK Tag:** Create or Modify System Process
- **ATT&CK ID:** T1543
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=6 is_signed=false image=*
```

2.480 LP_Possible Ursnif Registry Activity

- **Trigger Condition:** A new registry key under *AppDataLowSoftwareMicrosoft* is detected, which was used by Ursnif malware.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object=  
↪ "*\\Software\\AppDataLow\\Software\\Microsoft\\*" -user IN EXCLUDED_USERS
```

2.481 LP_VBA DLL Loaded by Office

- **Trigger Condition:** Loading of DLL related to VBA macros by Office products. To reduce false positives, we recommend you filter the use of the legitimate macro.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Attachment
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 source_image IN ["*\\winword.exe*", "*\\powerpnt.  
↪ exe*", "*\\excel.exe*", "*\\outlook.exe*"] image IN ["*\\VBE7.DLL*", "*\\VBEUI.DLL*",  
↪ "*\\VBE7INTL.DLL*"] -user IN EXCLUDED_USERS
```

2.482 LP_VM - High Risk Vulnerability on High Impact Assets

- **Trigger Condition:** High-risk vulnerability is detected in high impact assets.
- **ATT&CK Category:** Discovery

- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
(col_type=qualys* or col_type=Nessus or norm_id=VulnerabilityManagement) (severity=4
↪ or severity=5) source_address IN HIGH_IMPACT_ASSETS
```

2.483 LP_VM - High Risk Vulnerability on Low Impact Assets

- **Trigger Condition:** High-risk vulnerability is detected in low impact assets.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
(col_type=qualys* or col_type=Nessus or norm_id=VulnerabilityManagement) (severity=4
↪ OR severity=5) source_address IN LOW_IMPACT_ASSETS
```

2.484 LP_VM - High Risk Vulnerability on Medium Impact Assets

- **Trigger Condition:** High-risk vulnerability is detected in medium impact assets.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
(col_type=qualys* or col_type=Nessus or norm_id=VulnerabilityManagement) (severity=4 or severity=5) source_address IN MEDIUM_IMPACT_ASSETS
```

2.485 LP_VM - Medium Risk Vulnerability on High Impact Assets

- **Trigger Condition:** Medium-risk vulnerability is detected in high impact assets.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
(col_type=qualys* or col_type=Nessus or norm_id=VulnerabilityManagement) (severity=2 or severity=3) source_address IN HIGH_IMPACT_ASSETS
```

2.486 LP_VM - Medium Risk Vulnerability on Low Impact Assets

- **Trigger Condition:** Medium-risk vulnerability is detected in low impact assets.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
(col_type=qualys* or col_type=Nessus or norm_id=VulnerabilityManagement) (severity=2 or OR severity=3) source_address IN LOW_IMPACT_ASSETS
```

2.487 LP_VM - Medium Risk Vulnerability on Medium Impact Assets

- **Trigger Condition:** Medium-risk vulnerability is detected in medium impact assets.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Network Service Scanning
- **ATT&CK ID:** T1046
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
(col_type=qualys* or col_type=Nessus or norm_id=VulnerabilityManagement) (severity=2 or severity=3) source_address IN MEDIUM_IMPACT_ASSETS
```

2.488 LP_WannaCry MS17-010 Vulnerable Sources

- **Trigger Condition:** MS17-010 vulnerability is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Qualys, Vulnerability Management
- **Query:**

```
col_type=qualys* qualys_id IN [91345, 91357, 91359, 91360, 70077, 91360, 91345]
```

2.489 LP_WannaCry Sources in Connections to Sinkhole Domain

- **Trigger Condition:** A source tries to connect to the WannaCry sinkhole domain.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Proxy
- **ATT&CK ID:** T1090

- **Minimum Log Source Requirement:** Firewall, IDS/IPS, Webserver
- **Query:**

```
norm_id=* url IN WANNACRY_DOMAIN or domain IN WANNACRY_DOMAIN
```

2.490 LP_WCE wceaux dll Access Detected

- **Trigger Condition:** *wceaux.dll* access during Windows Credential Editor (WCE) pass-the-hash remote command execution on the source host.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping
- **ATT&CK ID:** T1003
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN ["4656", "4658", "4660", "4663"] object_name=
↳ "*"wceaux.dll" -user IN EXCLUDED_USERS
```

2.491 LP_Wdigest Registry Modification

- **Trigger Condition:** Modification of the wdigest registry value. Adversaries can enable wdigest authentication and retrieve users' plain text credentials.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Value label=Set target_object="*WDigest\UseLogonCredential"
```

2.492 LP_Weak Encryption Enabled for User

- **Trigger Condition:** Weak encryption enabled for a user profile, which is later used for hash or password cracking.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WinServer event_id=4738 user_account_control IN ["*DES*", "*Preauth*",
↪ "*Encrypted*"] user_account_control="*Enabled*" -user IN EXCLUDED_USERS
```

2.493 LP_Potential Webshell Activity Detected

- **Trigger Condition:** Specific command line parameters associated with reconnaissance activities via web shells are detected.
- **ATT&CK Category:** Discovery, Persistence
- **ATT&CK Tag:** Remote System Discovery, System Owner/User Discovery, Account Discovery, Web Shell
- **ATT&CK ID:** T1018, T1033, T1087, T1505.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" ((parent_process IN ["*\\w3wp.exe", "*\\php-cgi.exe",
↪ "*\\nginx.exe", "*\\httpd.exe", "*\\caddy.exe", "*\\ws_tomcat-service.exe"] OR (parent_
↪ process IN ["*\\java.exe", "*\\javaw.exe"] (parent_process IN ["*-tomcat-*", "*\\tomcat*"]
↪ OR command IN ["*catalina.jar*", "*CATALINA_HOME*"]))) (((file IN ["net.exe", "net1.
↪ exe"] command IN ["* user *", "* use *", "* group *"]) OR (file = "ping.exe" command
↪ = "* -n *") OR command IN ["*&cd&echo*", "*cd /d *"] OR (file = "wmic.exe"
↪ command = "*/node:*") OR ("process" IN ["*\\whoami.exe", "*\\systeminfo.exe",
↪ "*\\quser.exe", "*\\ipconfig.exe", "*\\pathping.exe", "*\\tracert.exe", "*\\netstat.exe",
↪ "*\\schtasks.exe", "*\\vssadmin.exe", "*\\wevtutil.exe", "*\\tasklist.exe"] OR file IN [
↪ "whoami.exe", "sysinfo.exe", "quser.exe", "ipconfig.exe", "pathping.exe", "tracert.exe
↪ ", "netstat.exe", "schtasks.exe", "VSSADMIN.EXE", "wevtutil.exe", "tasklist.exe"]) OR
↪ command IN ["* Test-NetConnection *", "*dir \\*"])))
```

2.494 LP_Windows Audit Logs Cleared

- **Trigger Condition:** The Windows Security audit log is cleared.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Clear Windows Event Logs
- **ATT&CK ID:** T1070.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label=Audit label=Log label=Clear -user IN EXCLUDED_USERS
```

2.495 LP_Windows Data Copied to Removable Device

- **Trigger Condition:** A file is copied to removable storage. For this alert to work, you must update the list CRITICAL_HOSTS, which includes hosts where admin monitors file copy across removable storage.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Physical Medium, Exfiltration over USB
- **ATT&CK ID:** T1052, T1052.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer* event_id=4663 event_category="Removable Storage" access=
↪ "WriteData*" or access="*AppendData*" host IN CRITICAL_HOSTS -user IN
↪ EXCLUDED_USERS
```

2.496 LP_Windows Defender Antivirus Disable via Registry Modification

- **Trigger Condition:** Windows Defender Antivirus registry values added or modified to set it to a disabled state are detected. Windows Defender Antivirus is a native anti-malware component of Microsoft Windows. Adversaries generally attempt to turn off anti-virus components of any system to inhibit detection.

- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Disable or Modify Tools
- **ATT&CK ID:** T1562.001
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="create" "process"="*\reg.exe" command=
↪ "*HKLM\Software\Policies\Microsoft\Windows Defender*" command="*add*1*"
↪ command IN ["*DisableAntiSpyware*", "*DisableAntiVirus*", "*MpEnablePus*",
↪ "*DisableBehaviorMonitoring*", "*DisableIOAVProtection*",
↪ "*DisableOnAccessProtection*", "*DisableRealtimeMonitoring*",
↪ "*DisableScanOnRealtimeEnable*", "*DisableEnhancedNotifications*",
↪ "*DisableBlockAtFirstSeen*"]
```

2.497 LP_Shadow Copy Deletion Using OS Utilities Detected

- **Trigger Condition:** Deletion of volume shadow copies using operating systems utilities. Adversaries can utilize Windows internal binaries such as Powershell, wmic, vssadmin, diskshadow, wbadmin and vssadmin to delete shadow copy from the system so that the data recovery and reverting system to saved state is impossible after dropping malware.
- **ATT&CK Category:** Impact, Defense Evasion
- **ATT&CK Tag:** Inhibit System Recovery, Indicator Removal
- **ATT&CK ID:** T1490, T1070
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create
(
("process" IN ["*\powershell.exe", "*\pwsh.exe", "*\wmic.exe", "*\vssadmin.exe",
↪ "*\diskshadow.exe"]
OR
file IN ["PowerShell.EXE", "pwsh.dll", "wmic.exe", "VSSADMIN.EXE", "diskshadow.exe" ])
command="*shadow*" command="*delete*"
)
```

(continues on next page)

(continued from previous page)

```

OR
(
("process" = "*\wbadmin.exe" OR file="WBADMIN.EXE")
command="*delete*" command="*catalog*" command="*quiet*"
)
OR
(
"process" = "*\vssadmin.exe" OR file="VSSADMIN.EXE"
((command="*resize*" command="*shadowstorage*")
OR
command IN ["*unbound*", "*/MaxSize=*"])
)
OR
(
command IN ["*Get-WmiObject*", "*gwmi*", "*Get-CimInstance*", "*gcim*"]
command="*'Win32_Shadowcopy*"
command IN ["*.Delete()*", "*Remove-WmiObject*", "*rwm*", "*Remove-CimInstance*",
↪ "*rcim*"]
)

```

2.498 LP_Windows Defender Exclusion Set Detected

- **Trigger Condition:** Events where a Windows Defender antivirus exclusion was added. Adversaries can abuse the file exclusion feature in Windows Defender to evade detection of their malicious binaries by excluding the file type or file from being scanned.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```

(norm_id=WinServer event_source="Microsoft-Windows-Windows Defender" event_
↪ id=5007 new_value="*\Microsoft\Windows Defender\Exclusions\*") OR (norm_
↪ id=WindowsSysmon event_id=13 target_object="*\Microsoft\Windows
↪ Defender\Exclusions*" event_type=setvalue)

```

2.499 LP_Windows Excessive Amount of Files Copied to Removable Device

- **Trigger Condition:** One hundred or more files the user copied to the removable storage device are detected. Threat actors generally attempt to exfiltrate as much data as possible through removable storage devices from the victim organizations. Setting the threshold value according to the organization's behavior or risk appetite is recommended. It is recommended to enable this alert only if the organizational policy explicitly disallows this behavior.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Physical Medium, Exfiltration over USB
- **ATT&CK ID:** T1052, T1052.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer* event_id=4663 event_category="Removable Storage" access=
↪ "WriteData*" or access="*AppendData*" -user IN EXCLUDED_USERS | chart distinct_
↪ count(object) as DataCopied by user | search DataCopied>100
```

2.500 LP_Windows Failed Login Attempt Using Service Account

- **Trigger Condition:** A user fails to log in using a service account. Generally, failed logon events with logon type 5 indicate the password change without updating the service; however, a possibility of malicious users at work exists. Conversely, the existence of malicious users is less likely to happen as creating a new service or editing an existing service by default requires membership in Administrators or Server Operators. Also, malicious users will already have the authority to perpetuate their desired goal.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts
- **ATT&CK ID:** T1078
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer* label=User label=Login label=Fail target_user=*ORuser=?/logon_
↪ type = 5 -user IN EXCLUDED_USERS | rename target_user as user, target_domain as?
↪ domain
```

2.501 LP_Windows Failed Login Followed by Lockout Event

- **Trigger Condition:** A failed login attempt followed by account lockout is detected.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts, Exploitation for Credential Access, Exploitation for Privilege Escalation, Exploitation for Defense Evasion, Brute Force
- **ATT&CK ID:** T1078, T1212, T1068, T1211 ,T1110
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
[norm_id=WinServer label=User label=Login label=Fail -user IN EXCLUDED_USERS] as s1?
↪ followed by [norm_id=WinServer label=User label=Account label=Lock user=*] as s2 on?
↪ s1.user=s2.user | rename s1.user as User, s1.source_address as SourceAddress, s2.
↪ workstation as ComputerName, s2.caller_domain as Domain, s1.log_ts as?
↪ LastFailedLogin_ts, s2.log_ts as LockedOut_ts
```

2.502 LP_Windows Local User Management

- **Trigger Condition:** A user is created on a non-domain controller. For the alert to work, you must update the list DOMAIN with domain controllers.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Create Account, Local Account
- **ATT&CK ID:** T1136, T1136.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer* label=User label=Create -target_user=*-user= -target_domain IN
DOMAIN -domain IN DOMAIN -user IN EXCLUDED_USERS
```

2.503 LP_WMI DLL Loaded by Office

- **Trigger Condition:** Loading of DLLs related to WMI by Office products signaling VBA macros executing WMI Commands.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** User Execution, Malicious File
- **ATT&CK ID:** T1204, T1204.002
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 source_image IN ["*\\winword.exe", "*\\powerpnt.
exe", "*\\excel.exe", "*\\outlook.exe"] image IN ["*\\wmiutils.dll", "*\\wbemcomn.dll",
"*\\wbemprox.dll", "*\\wbemdisp.dll", "*\\wbemsvc.dll"] -user IN EXCLUDED_USERS
```

2.504 LP_Windows Processes Suspicious Parent Directory Detected

- **Trigger Condition:** Suspicious parent processes of Windows processes are detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Rename System Utilities, Match Legitimate Name or Location
- **ATT&CK ID:** T1036.003, T1036.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process" IN ["*\\svchost.exe", "*\\taskhost.exe", "*\\lsm.exe",
"*\\lsass.exe", "*\\services.exe", "*\\lsiso.exe", "*\\csrss.exe", "*\\wininit.exe",
"*\\winlogon.exe"] -((parent_process IN ["*\\SavService.exe", "*\\ngen.exe"] parent_
process IN ["*\\System32\\*", "*\\SysWOW64\\*"]) OR (parent_process IN ["*\\Windows
Defender\\*", "*\\Microsoft Security Client\\*"] parent_process="*\\MsMpEng.exe*") OR
(parent_process="-"))
```

2.505 LP_Windows Registry Persistence COM Key Linking Detected

- **Trigger Condition:** COM object hijacking via TreatAs subkey is detected. It is rare, but there are some cases where system utilities use linking keys for backward compatibility.
- **ATT&CK Category:** Privilege Escalation, Persistence
- **ATT&CK Tag:** Event Triggered Execution, Component Object Model Hijacking
- **ATT&CK ID:** T1546, T1546.015
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=12 target_object="HKU\*_Classes\CLSID\*\TreatAs" -
↪ user IN EXCLUDED_USERS
```

2.506 LP_Windows Shell Spawning Suspicious Program

- **Trigger Condition:** A suspicious child process of Windows Shell and scripting processes such as Wscript, Rundll32, Regsvr32, powershell and Mshta is detected.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** PowerShell, Visual Basic, System Binary Proxy Execution
- **ATT&CK ID:** T1059.001, T1059.005, T1218
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process IN ["*\mshta.exe", "powershell.exe",
↪ "rundll32.exe", "cscript.exe", "wscript.exe", "wmiprvse.exe", "pwsh.exe",
↪ "regsvr32.exe"] "process" IN ["schtasks.exe", "nslookup.exe", "certutil.exe",
↪ "bitsadmin.exe", "mshta.exe"] -(path="ccmcache\*" OR (parent_process=
↪ "mshta.exe" "process"="mshta.exe" parent_command="C:\MEM_Configmgr_*"
↪ parent_command="*\splash.hta*" parent_command="*{1E460BD7-F1C3-4B2E-88BF-
↪ 4E770A288AF5}*" command="C:\MEM_Configmgr_*" command=
↪ "SMSSETUP\BIN\*" command="*\autorun.hta*" command="*{1E460BD7-F1C3-
↪ 4B2E-88BF-4E770A288AF5}*" OR command="*\nessus_*" OR (parent_command=
↪ "Program Files\Amazon\WorkSpacesConfig\Scripts\setup-scheduledtask.ps1*" parent_
↪ command="*\Program Files\Amazon\WorkSpacesConfig\Scripts\set-selfhealing.ps1*"
↪ parent_command="*\Program Files\Amazon\WorkSpacesConfig\Scripts\check-
↪ workspacehealth.ps1*))
```

(continues on next page)

(continued from previous page)

2.507 LP_Windows User Account Created via Command Line

- **Trigger Condition:** Creation of a user account via CLI like PowerShell or net utility.
- **ATT&CK Category:** Execution, Persistence
- **ATT&CK Tag:** Create Account, PowerShell, Windows Command Shell
- **ATT&CK ID:** T1136, T1059.001, T1059.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" ("command"="*New-LocalUser*" OR "command"=  
↪ "*net* user *add*" OR "command"="*wmic UserAccount create*" OR "command"=  
↪ "*wmic useraccount create*")
```

2.508 LP_Windows User Account Change to End with Dollar Sign

- **Trigger Condition:** A user account is changed to end with the dollar sign (\$).
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Account Manipulation
- **ATT&CK ID:** T1098
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer* label=User label=Account label=Change label=Name new_user="*$ -  
↪ user IN EXCLUDED_USERS | rename caller_user as user, caller_domain as domain
```

2.509 LP_Windows Webshell Creation Detected

- **Trigger Condition:** Creation of WebShell file on a static web site. The alert has been directly translated from sigma rule.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Server Software Component, Web Shell
- **ATT&CK ID:** T1505, T1505.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 ((path="*\inetpub\wwwroot*" file IN [ "*.asp", "*.ashx", "*.ph" ]) OR (path IN [ ".*\www\*", ".*\htdocs\*", ".*\html\*" ] file="*.ph") OR (file="*.jsp" path="*\cgi-bin\*" path="*.pl*"))
-path IN [ ".*\AppData\Local\Temp*", ".*\Windows\Temp*"]
```

2.510 LP_Winlogon Helper DLL

- **Trigger Condition:** Modification of registry entries related to winlogon.exe to load and execute possible malicious DLLs and/or executables is detected.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Boot or Logon Autostart Execution, Winlogon Helper DLL
- **ATT&CK ID:** T1547, T1547.004
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) (target_object="*\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Winlogon\user_nameinit*" or
target_object="*\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Winlogon\Shell\*" or target_object="*\SOFTWARE\Microsoft\Windows
NT\CurrentVersion\Winlogon\Notify\*")
-user IN EXCLUDED_USERS
```

2.511 LP_WMI Backdoor Exchange Transport Agent

- **Trigger Condition:** WMI backdoor in Exchange Server Software Component and Transport Agents via WMI event filters is detected.
- **ATT&CK Category:** Privilege Escalation, Persistence
- **ATT&CK Tag:** Event Triggered Execution, Windows Management Instrumentation Event Subscription
- **ATT&CK ID:** T1546, T1546.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 parent_image="*\EdgeTransport.exe" -user IN[?]
↪ EXCLUDED_USERS
```

2.512 LP_WMI Modules Loaded by Suspicious Process

- **Trigger Condition:** Loading of WMI modules by suspicious processes like a binary from ProgramData. Legitimate system processes and third-party utilities extensively use WMI. We recommend you whitelist to reduce false positive flooding. Also, do not monitor C:Windows* as extensive whitelisting is required, which may hamper query's performance.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Windows Management Instrumentation
- **ATT&CK ID:** T1047
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Image label=Load image IN ["*wmicnt.dll", "*WmiApRpl.dll", "*wmi prov.dll",
↪ "*wmiutils.dll", "*wbemcomn.dll", "*wbemprox.dll", "*WMINet_Utls.dll", "*wbemsvc.dll",
↪ "*fastprox.dll"] -"process" IN ["C:\Program Files\*", "C:\Program Files (x86)\*",
↪ "*\WmiPrvSE.exe", "*\WmiApSrv.exe", "*\svchost.exe", "*\DeviceCensus.exe",
↪ "*\CompatTelRunner.exe", "*\sdiagnhost.exe", "*\SIHClient.exe", "*\ngentask.exe",
↪ "*\windows\system32\taskhostw.exe", "*\windows\system32\MoUsoCoreWorker.exe",
↪ "*\windows\system32\wbem\WMIADAP.exe", "C:\Windows\Sysmon64.exe",
↪ "C:\Windows\Sysmon.exe", "C:\Windows\System32\wbem\unsecapp.exe", "*\logman.
↪ exe", "*\systeminfo.exe", "*\nvcontainer.exe", "C:\Windows\System32\wbem\WMIC.
↪ exe", "*\explorer.exe", "*\opera_autoupdate.exe", "*\MsMpEng.exe", "*\thor64.exe",
↪ "*\thor.exe", "*\WaAppAgent.exe", "*\WindowsAzureGuestAgent",
↪ "*\Microsoft\Teams\Update.exe", "*\Microsoft\Teams\current\Teams.exe",
```

2.511. ↪ "*\Windows\System32\ServerManager.exe", "*\Windows\System32\wds.exe", 242
↪ "*\Windows\System32\dsrs.exe", "*\Windows\System32\SecurityHealthService.exe",
↪ "*\Windows\System32\dxdiag.exe", "*\Windows\System32\dispdiag.exe",
↪ "*\Windows\System32\gpreresult.exe", "*\Windows\System32\tasklist.exe"]

(continued from previous page)

2.513 LP_WMI Persistence - Script Event Consumer Detected

- **Trigger Condition:** Windows Management Instrumentation (WMI) script event consumers are detected. Attackers leverage WMI ActiveScriptEventConsumers remotely to move laterally in the network.
- **ATT&CK Category:** Privilege Escalation, Persistence
- **ATT&CK Tag:** Event Triggered Execution, Windows Management Instrumentation Event Subscription
- **ATT&CK ID:** T1546, T1546.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*:\WINDOWS\system32\wbem\scrcons.exe"  
↪parent_process="*:\Windows\System32\svchost.exe" -user IN EXCLUDED_USERS
```

2.514 LP_WMI Persistence - Script Event Consumer File Write

- **Trigger Condition:** File writes of WMI script event consumer are detected.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** Event Triggered Execution, Windows Management Instrumentation Event Subscription
- **ATT&CK ID:** T1546, T1546.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 source_image=  
↪"C:\WINDOWS\system32\wbem\scrcons.exe" -user IN EXCLUDED_USERS
```

2.515 LP_Wsreset UAC Bypass Detected

- **Trigger Condition:** A method that uses the `Wsreset.exe` tool to reset the Windows Store bypassing UAC is detected.
- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** Abuse Elevation Control Mechanism, Bypass User Access Control
- **ATT&CK ID:** T1548, T1548.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\\WSreset.exe"(-"process"="*\\conhost.
↪exe" OR integrity_level IN [High,System])
```

2.516 LP_XSL Script Processing Detected

- **Trigger Condition:** Application control bypass attempt via execution of embedded scripts inside Extensible Stylesheet Language (XSL) files is detected. The alert detects another variation of this technique, dubbed *Squiblytwo*, that utilizes WMI to invoke JScript or VBScript within an XSL file. Legitimate invocations of `msxsl` employ the `-o` command-line argument should be whitelisted to reduce false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** XSL Script Processing
- **ATT&CK ID:** T1220
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (((("process"="*\\wmic.exe" command IN ["* format*:*", "* /
↪format*:*", "*-format*:*"] ) -command in ["*Format:List", "*Format:htable",
↪"*Format:hform", "*Format:table", "*Format:mof", "*Format:value", "*Format:rawxml",
↪"*Format:xml", "*Format:csv"] ) OR ("process"="*\\msxsl.exe" -command="* -o *")) -
↪user IN EXCLUDED_USERS
```

2.517 LP_ZOHO Dctask64 Process Injection Detected

- **Trigger Condition:** Process injection using ZOHO's dctask64.exe is detected.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Process Injection
- **ATT&CK ID:** T1055
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\dctask64.exe" -command="*DesktopCentral_
↪Agent\agent*" -user IN EXCLUDED_USERS
```

2.518 LP_APT 34 Initial Access Using Spearphishing Link Detected

- **Trigger Condition:** Entry vectors try to gain their initial foothold within a network using Spearphishing link with IOCs' attacks related to APT34. For the alert to work, it uses lists; IRANIAN_SPEARPHISHING_DOMAINS and IRANIAN_SPEARPHISHING_IP.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Spearphishing Link
- **ATT&CK ID:** T1566
- **Minimum Log Source Requirement:** EmailServer
- **Query:**

```
norm_id=* label=Detect label=Malicious label=URL (source_address in IRANIAN_
↪SPEARPHISHING_IP OR domain in IRANIAN_SPEARPHISHING_DOMAINS) -user IN
↪EXCLUDED_USERS
```

2.519 LP_Suspicious File Deletion Detected

- **Trigger Condition:** Adversaries remove trail files for an intrusion to keep their footprint low or remove them at the end as part of the post-intrusion cleanup process. For the alert to work, you must configure ACLs on paths and extensions you want to monitor for deletion operations.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** File Deletion
- **ATT&CK ID:** T1070.004
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label=Object label=Access access="*delete*" (relative_target="*.exe
↪ " OR relative_target="*.bat" OR relative_target="*.ps1" OR relative_target="*.cmd") -
↪ user IN EXCLUDED_USERS | rename relative_target as file
```

2.520 LP_Security Software Discovery Process Detected

- **Trigger Condition:** Adversaries attempts to get a listing of security software, configurations, defensive tools, and sensors that are installed on the system.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** Security Software Discovery
- **ATT&CK ID:** T1518
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label="Process" label=Create (command="*findstr.exe*virus" OR
↪ command="*findstr.exe*cylance" OR command="*findstr.exe*defender" OR
↪ command="*findstr.exe*cb" ) -user IN EXCLUDED_US
```

2.521 LP_System Network Configuration Discovery

- **Trigger Condition:** Discovery of network configuration via system utilities like ipconfig, route, or netsh is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** System Network Configuration Discovery
- **ATT&CK ID:** T1016
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label="Process" label=Create (command="*ipconfig.exe*" OR
↪ command="*route.exe*" OR command="*netsh advfirewall*" OR command="*arp.exe*"
↪ " OR command="*nbtstat.exe*" OR command="*netsh.exe*interface show" OR
↪ command="*net*config" ) -user IN EXCLUDED_USERS | rename commandline as
↪ command
```

2.522 LP_System Network Connections Discovery

- **Trigger Condition:** Discovery of network connections via system utilities like netstat or net is detected.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** System Network Connections Discovery
- **ATT&CK ID:** T1049
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process" IN ["*net.exe", "*netstat.exe"] command IN [
↪ "*net* use*", "*net* sessions*", "*net* file*", "*netstat*"]) OR command="*Get-
↪ NetTCPConnection*" -user IN EXCLUDED_USERS
```

2.523 LP_Exfiltration over Cloud Application Detected

- **Trigger Condition:** Adversaries performs data exfiltration with a different protocol from the main Command and Control protocol or channel.
- **ATT&CK Category:** Exfiltration
- **ATT&CK Tag:** Exfiltration Over Alternative Protocol
- **ATT&CK ID:** T1048
- **Minimum Log Source Requirement:** ProxyServer
- **Query:**

```
norm_id=*Proxy* source_address=* destination_address=* destination_address IN ?
↪ CLOUD_APPLICATION_IP -user IN EXCLUDED_USERS
```

2.524 LP_Remote File Copy Detected

- **Trigger Condition:** Files are copied from one system to another to stage adversary tools or other files throughout an operation.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote File Copy
- **ATT&CK ID:** T1105
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label=Object label=Access access=* (relative_target="*.exe" OR ?
↪ relative_target="*.bat") -user IN EXCLUDED_USERS | rename relative_target as file
```

2.525 LP_Privilege Escalation - Bypassing User Account Control Detected

- **Trigger Condition:** Adversaries uses techniques to elevate a user's privileges manipulating UAC to administer if the target process is unprotected.
- **ATT&CK Category:** Privilege Escalation

- **ATT&CK Tag:** Bypass User Account Control
- **ATT&CK ID:** T1548
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
(norm_id=WindowsSysmon OR ((command=* OR commandline=*) norm_id=WinServer))
↪ label="Process" label=Create (command="*eventvwr.exe*" OR commandline=
↪ "*eventvwr.exe*" OR command="*wscript.exe*" OR commandline="*wscript.exe*" OR
↪ token_elevation_type="TokenElevationTypeLimited*")
-user IN EXCLUDED_USERS | rename commandline as command
```

2.526 LP_Process Execution from Suspicious Location

- **Trigger Condition:** Execution of a process from suspicious location.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Masquerading
- **ATT&CK ID:** T1036
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create "process" IN ["C:\ProgramData\*.exe", "*\AppData\Local\*.
↪ exe", "*\AppData\Roaming\*.exe", "C:\Users\Public\*"] - "process" IN ["*\Teams.exe",
↪ "*\Teams\Update.exe", "*\Temp\*\dismhost.exe", "*Microsoft\OneDrive\*\FileCoAuth.
↪ exe", "C:\ProgramData\Microsoft\*\MpCmdRun.exe",
↪ "*\Local\Temp\*\BackgroundDownload.exe", "*Microsoft\Windows Defender\*\NisSrv.
↪ exe", "C:\ProgramData\Microsoft\*\MsMpEng.exe"]
```

2.527 LP_Active Directory Enumeration via ADFind

- **Trigger Condition:** Enumeration of Active Directory using the Adfind tool. AdFind is a CLI-based utility that can be used for gathering information from Active Directory like organizational units, users, computers, and groups. Adversaries can use this utility to gather information related to the Active Directory.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell

- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label=Create "process"="*.exe" command IN ["*-f *objectcategory*",
↪ "*-sc trustdmp*", "*|lockoutduration*", "*|lockoutthreshold",
↪ "*|lockoutobservationwindow*", "*|maxpwdage*", "*|minpwdage*", "*|minpwdlength*",
↪ "*|pwdhistorylength*", "*|pwdproperties*", "*-sc admincountdmp*", "*-sc?",
↪ exchaddresses*"]
```

2.528 LP_Possible Command Prompt Process Hollowing

- **Trigger Condition:** Possible process hollowing of the command prompt is detected using applications like net.exe, nltest.exe or ipfconfig. Adversaries injects malicious code into suspended and hollowed processes to evade process-based defenses.
- **ATT&CK Category:** Defense Evasion, Privilege Escalation
- **ATT&CK Tag:** Process Injection, Process Hollowing
- **ATT&CK ID:** T1055, T1055.012
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WindowsSysmon event_id=1 parent_image="*|cmd.exe" image IN ["*|net.exe",
↪ "*|net1.exe", "*|nltest.exe", "*|ipconfig.exe"] -parent_command IN ["*/c *", "*/k *"]
```

2.529 LP_Suspicious Taskkill Activity

- **Trigger Condition:** Multiple processes terminated in a short time via taskkill command that may signal malicious activity like ransomware.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** Service Stop
- **ATT&CK ID:** T1489
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label="Process" label=Create "process"="*\taskkill.exe" (command= "*f*" command=
↪ "*im*") OR command="*IM*" -parent_process IN ["*\AppData\Local\Temp*",
↪ "*\Windows\Temp*"] -parent_process="*.tmp"
```

2.530 LP_Ryuk Wake-On-LAN Activity

- **Trigger Condition:** Ryuks Wake-On-LAN activity is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4688 "process"="*.exe" command="* 8 LAN *"
```

2.531 LP_EXE or DLL Dropped in Perflogs Folder

- **Trigger Condition:** The EXE or DLL file is dropped in Windows's Perflog directory.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 file IN ["*.dll", "*.exe"] path="C:\Perflogs*"
```

2.532 LP_Credential Access via LaZagne

- **Trigger Condition:** Credential accessed via the popular open-source LaZagne tool.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, LSASS Memory

- **ATT&CK ID:** T1003,T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
norm_id=WindowsSysmon event_id=10 call_trace="*C:\Windows\SYSTEM32\ntdll.  
↪dll+*|C:\Windows\System32\KERNELBASE.dll+*_ctypes.pyd+*python27.dll+*"
```

2.533 LP_RDP Connection Initiated from Domain Controller

- **Trigger Condition:** Initiation of RDP connection from a domain controller.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Remote Services, Remote Desktop Protocol
- **ATT&CK ID:** T1021, T1021.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_source="Microsoft-Windows-TerminalServices-  
↪RemoteConnectionManager" event_id=1149 | rename eventxml.param3 as source_  
↪address | search source_address IN WINDOWS_DC
```

2.534 LP_Active Directory Module Load in PowerShell

- **Trigger Condition:** Active Directory module is loaded via PowerShell.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id=WinServer event_id=4103 command IN ["*Import-Module*", '*ipmo*'] payload=  
↪"*ActiveDirectory*"
```

2.535 LP_Possible Active Directory Enumeration via AD Module

- **Trigger Condition:** Command related to retrieving the last logon date of a computer in an Active Directory (AD).
- **ATT&CK Category:** Execution, Discovery
- **ATT&CK Tag:** Remote System Discovery, Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1018, T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id=WinServer event_id=4103 command="Get-ADComputer" payload=
  ↳ "*DNSHostName*LastLogonDate*"
```

2.536 LP_Microsoft Defender Disabling Attempt via PowerShell

- **Trigger Condition:** Attempt to disable Microsoft Defender via PowerShell.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools, Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1562, T1562.001, T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id=WinServer event_id=4104 script_block IN ["*Set-MpPreference -
  ↳ DisableRealtimeMonitoring 1*", "*Set-MpPreference -DisableBehaviorMonitoring 1*",
  ↳ "*Set-MpPreference -DisableScriptScanning 1*", "*Set-MpPreference -
  ↳ DisableBlockAtFirstSeen 1*", "*Set-MpPreference -DisableRealtimeMonitoring $true*",
  ↳ "*Set-MpPreference -DisableBehaviorMonitoring $true*", "*Set-MpPreference -
  ↳ DisableScriptScanning $true*", "*Set-MpPreference -DisableIOAVProtection $true*",
  ↳ "*Set-MpPreference -DisableRealtimeMonitoring $true*", "*Set-MpPreference -
  ↳ DisableBlockAtFirstSeen $true*", "*Set-MpPreference -drtm $true*", "*Set-
  ↳ MpPreference -dbm $true*", "*Set-MpPreference -dscrptsc $true*", "*Set-
  ↳ MpPreference -dbaf $true*", "*Set-MpPreference -drtm 1*", "*Set-MpPreference -dbm
  ↳ 1*", "*Set-MpPreference -dscrptsc 1*", "*Set-MpPreference -dbaf (continues on next page)"]
```

(continued from previous page)

2.537 LP_Possible Kerberoasting via Rubeus

- **Trigger Condition:** Kerberoasting attack via popular open-source tool Rubeus.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** Steal or Forge Kerberos Tickets, Kerberoasting
- **ATT&CK ID:** T1558, T1558.003
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=7 - "process"="C:\Windows\System32\*" image IN [
↪ "*\clr.dll", "*\kerberos.dll", "*\cryptdll.dll", "*\dsparse.dll"] | chart distinct_
↪ count(image) as dc, distinct_list(image) as images | search dc=4
```

2.538 LP_Suspicious Scheduled Task Creation

- **Trigger Condition:** Creation of a suspicious scheduled task in a Windows endpoint. Adversaries may abuse the Windows Task Scheduler to perform task scheduling for the initial or recurring execution of malicious code to achieve persistence, lateral movement, execution, detection evasion, and privilege escalation. Also, it is prevalent among ransomware to use public directories for scheduled task creation.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Scheduled Task
- **ATT&CK ID:** T1053.005
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label=Schedule label=Task label=Create command IN ["*C:\Users\*",
↪ "*C:\Windows\Temp\*", "*C:\ProgramData\*"] -command=
↪ "C:\ProgramData\Microsoft\Windows Defender\Platform\*
```

2.539 LP_RDP Connection Initiated from Suspicious Country

- **Trigger Condition:** Initiation of RDP connection from a domain controller is detected.
- **ATT&CK Category:** Defense Evasion, Persistence, Privilege Escalation, Initial Access
- **ATT&CK Tag:** Valid Accounts, Domain Accounts
- **ATT&CK ID:** T1078, T1078.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_source="Microsoft-Windows-TerminalServices-
↳ RemoteConnectionManager" event_id=1149 -eventxml.param3 IN HOMENET | rename
↳ eventxml.param3 as source_address
| process geoip(source_address) as country | search country IN SUSPICIOUS_COUNTRY
```

2.540 LP_Scheduled Task Deletion

- **Trigger Condition:** Deletion of a scheduled task using `schtasks` utility with `delete` command is detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Scheduled Task
- **ATT&CK ID:** T1053.005
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label="process" label="create" "process"="*\schtasks.exe" command="*delete*") OR
↳ (norm_id=WinServer event_id=4699 -task="*\Microsoft\Windows\RemovalTools\MRT_
↳ ERROR_HB")
```

2.541 LP_Exchange Remote Code Execution CVE-2020-0688 Attempt

- **Trigger Condition:** A remote code execution attempt via CVE-2020-0688 in Microsoft Exchange is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** External Remote Services
- **ATT&CK ID:** T1133
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* (url="*/ecp/default.aspx*__VIEWSTATEGENERATOR*VIEWSTATE=*" OR
↪resource="*__VIEWSTATEGENERATOR*VIEWSTATE=*" )
```

2.542 LP_BlueKeep Vulnerability CVE-2019-0708 Exploitation

- **Trigger Condition:** The exploitation of BlueKeep, a remote desktop services remote code execution vulnerability, also known as CVE-2019-0708 is detected.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Exploitation of Remote Services
- **ATT&CK ID:** T1210
- **Minimum Log Source Requirement:** IDS/IPS
- **Query:**

```
(norm_id=Snort OR norm_id=SuricataIDS) message="*Windows RDP MS_T120*"
```

2.543 LP_ZoHo ManageEngine Pre-Auth File Upload CVE-2019-8394 Exploitation Attempt

- **Trigger Condition:** A pre-auth file upload vulnerability CVE-2019-8394 in ZoHo ManageEngine ServiceDesk Plus is detected.

- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=POST (url='*/common/FileAttachment.jsp?  
↪module=CustomLogin*' OR resource='*/common/FileAttachment.jsp?  
↪module=CustomLogin*')
```

2.544 LP_ZoHo ManageEngine Desktop Central CVE-2020-10189 Exploitation Attempt

- **Trigger Condition:** A remote code execution attempt via CVE-2019-11580 in ZoHo ManageEngine Desktop Central is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=POST (url='*/mdm/client/v1/mdmLogUploader*webapps*_  
↪chart*' OR resource='*/mdm/client/v1/mdmLogUploader*webapps*_chart*')
```

2.545 LP_Fortinet Pre-Auth File Read CVE-2018-13379 Exploitation Attempt

- **Trigger Condition:** The exploitation of pre-auth file read vulnerability (2018-13379) in Fortinet FortiOS is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** External Remote Services
- **ATT&CK ID:** T1133

- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* (url='*lang=../../dev/cmdb/sslvpn_websession*' OR resource='*lang=../../dev/cmdb/sslvpn_websession*')
```

2.546 LP_Adobe ColdFusion Remote Code Execution CVE-2018-15961 Attempt

- **Trigger Condition:** The exploitation of arbitrary file upload vulnerability (CVE-2018-15961) to upload JSP webshell for remote code execution in Adobe ColdFusion is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=POST (url='*/cf_scripts/*/upload.cfm*' OR resource='*/cf_scripts/*/upload.cfm*')
```

2.547 LP_Default Hard disk Usage Status

- **Trigger Condition:** The hard disk uses storage greater than or equal to 80%.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Logpoint
- **Query:**

```
label=Harddisk label=Usage label=Metrics use>=80
```

2.548 LP_Default License Grace State

- **Trigger Condition:** Logpoint's license has expired and is operating in grace state.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Logpoint
- **Query:**

```
norm_id=Logpoint label=Audit label=License label=Grace
```

2.549 LP_Default License Invalid

- **Trigger Condition:** 's license is no longer valid.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:**
- **Query:**

```
norm_id=LogPoint label=Audit label=License label=Invalid
```

2.550 LP_Microsoft Build Engine Loading Credential Libraries

- **Trigger Condition:** Loading of credential libraries such as *vaultcli.dll* and *SAMLib.dll* by MS Build engine is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, Security Account Manager
- **ATT&CK ID:** T1003, T1003.002
- **Minimum Log Source Requirement:** Windows Sysmon

- **Query:**

```
norm_id=WindowsSysmon event_id=7 "process"='*\msbuild.exe' image IN ['*\vaultcli.dll',
↪ '\SAMLlib.DLL']
```

2.551 LP_Potential Phishing Attack Detected

- **Trigger Condition:** Phishing attack is detected
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Phishing, Spearphishing Attachment
- **ATT&CK ID:** T1566, T1566.001
- **Minimum Log Source Requirement:** MailServer
- **Query:**

```
label=Detect label=Malicious label=File file=* sender=* receiver=* hash=*
```

2.552 LP_Safe DLL Search Mode Disabled

- **Trigger Condition:** Safe DLL search mode is disabled.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable or Modify Tools
- **ATT&CK ID:** T1562, T1562.001
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WindowSysmon event_id=13 target_object=
↪ '*\CurrentControlSet\Control\Session Manager\SafeDllSearchMode' detail="DWORD?
↪ (0x00000000)"
```

2.553 LP_Potential Intrusion Detected

- **Trigger Condition:** An intrusion by IDS or IPS devices is detected.
- **ATT&CK Category:** Command and Control, Defense Evasion
- **ATT&CK Tag:** Proxy, Exploitation for Defense Evasion
- **ATT&CK ID:** T1090, T1211
- **Minimum Log Source Requirement:** -
- **Query:**

```
label=Intrusion label=Detect source_address=* destination_address=*
```

2.554 LP_Windows Crash Dump Disabled

- **Trigger Condition:** Windows's crash dump registry setting is disabled.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object=  
↪ "HKLM\System\CurrentControlSet\Control\CrashControl\CrashDumpEnabled" detail=  
↪ "DWORD (0x00000000)"
```

2.555 LP_Suspicious Shells Spawn by SQL Server

- **Trigger Condition:** Suspicious shell process spawned by the SQL Server process which may indicate exploitation of a vulnerability.
- **ATT&CK Category:** Initial Access, Execution
- **ATT&CK Tag:** Exploit Public-Facing Application, PowerShell
- **ATT&CK ID:** T1190, T1059.001

- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4688 parent_process="*\sqlservr.exe" "process" IN [
↪ ".*\cmd.exe", ".*\powershell.exe", ".*\bash.exe", ".*\sh.exe", ".*\bitsadmin.exe"] -(parent_
↪ process IN ["C:\Program Files\Microsoft SQL Server\*", ".*DATEV_
↪ DBENGINE\MSSQL\Binn\sqlservr.exe"] "process"="C:\Windows\System32\cmd.exe"?)
↪ command="'C:\Windows\system32\cmd.exe" *)
```

2.556 LP_Suspicious Microsoft SQL Server PowerShell Module Use Detected

- **Trigger Condition:** A PowerShell code through the `sqlps.exe` utility, which is included in the standard set of utilities supplied with the MSSQL Server is detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **ATT&CK ID:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Create label="Process"("process"=".*\sqlps.exe" OR parent_process=".*\sqlps.exe
↪ " OR file=".*\sqlps.exe" ) -(parent_process=".*\sqlagent.exe")
```

2.557 LP_UltraVNC Execution via Command Line

- **Trigger Condition:** Execution of UltraVNC via the command line. Gamaredon is known to use this technique to gain remote access.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Remote Access Software
- **ATT&CK ID:** T1219
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
norm_id=WinServer event_id=4688 command="*-autoreconnect*" command="*-
↪connect*" command="*-id:*
```

2.558 LP_Office Security Settings Changed

- **Trigger Condition:** Modification of Microsoft Office security settings in the registry.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Modify Registry
- **ATT&CK ID:** T1112
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object In ["*\Security\Trusted?
↪Documents\TrustRecords*", " *\Security\AccessVBOM*", " *\Security\VBWarnings*"]
```

2.559 LP_Microsoft Defender AMSI Trigger

- **Trigger Condition:** Triggering of Microsoft Defender with AMSI as the detection source. AMSI is agnostic of antimalware vendors and is designed to allow for the most common malware scanning and protection techniques.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=1116 source_name=AMSI event_source="Microsoft-
↪Windows-Windows Defender"
```

2.560 LP_Actinium IoC Domains Detected

- **Trigger Condition:** When any Actinium IoC domain match is found. IoC Reference: Hashes are latest up to Feb 2022.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** IDS, IPS, Firewall
- **Query:**

```
domain IN ACTINIUM_DOMAINS
```

2.561 LP_Suspicious VMToolsd Child Process

- **Trigger Condition:** Creation of a suspicious child process of the VMware Tools process that may indicate persistence set up by attackers.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4688 parent_process="*\vmtoolsd.exe" image IN ["*\cmd.exe",
↪ "\powershell.exe", "\wscript.exe", "\cscript.exe", "\rundll32.exe", "\regsvr32.exe"]
↪ -command IN ["*\VMware\VMware Tools\poweron-vm-default.bat*",
↪ "\VMware\VMware Tools\poweroff-vm-default.bat*", "\VMware\VMware Tools\resume-vm-default.bat*",
↪ "\VMware\VMware Tools\suspend-vm-default.bat"]
```

2.562 LP_Impacket PsExec Execution

- **Trigger Condition:** Execution of Impacket's PsExec utility. Impacket is a collection of Python classes that work with network protocols. It is focused on providing low-level programmatic access to the packets and is commonly used in PoCs.

- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** Lateral Tool Transfer
- **ATT&CK ID:** T1570
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5145 share_name="IPC$" relative_target IN ["*RemCom_
↪stdint*", "*RemCom_stdoutt*", "*RemCom_stderrt*"]
```

2.563 LP_Oracle WebLogic CVE-2021-2109 Exploitation

- **Trigger Condition:** Possible exploitation of the Oracle WebLogic server vulnerability CVE-2021-2109 is detected. This vulnerability allows a high privileged attacker with network access via HTTP to compromise Oracle WebLogic Server.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** Exploit Public-Facing Application
- **ATT&CK ID:** T1190
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=GET url="*com.bea.console.handles.JndiBindingHandle*"
↪url="*ldap://*" url="*AdminServer"
```

2.564 LP_PowerShell ADRecon Execution

- **Trigger Condition:** Execution of the ADRecon PowerShell script for AD reconnaissance. The script is reported to be actively used by FIN7. For the alert to work, the Script block logging must be enabled.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows

- **Query:**

```
norm_id=WinServer event_id=4104 script_block IN ["*Function Get-ADRExcelComOb*",
↪ "*ADRecon-Report.xlsx*", "*Get-ADRGPO*", "*Get-ADRDdomainController*"]
```

2.565 LP_PowerView PowerShell Commandlets

- **Trigger Condition:** Execution of PowerShell commandlets of the popular PowerView module of the PowerSploit framework is detected. For the alert to work, the script block logging must be enabled.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter, PowerShell
- **ATT&CK ID:** T1059, T1059.001
- **Minimum Log Source Requirement:** Windows, PowerShell
- **Query:**

```
norm_id=WinServer event_id=4104 script_block IN ["Export-PowerViewCSV", "Get-
↪ IPAddress", "Resolve-IPAddress", "Convert-NameToSid", "ConvertTo-SID", "Convert-
↪ ADName", "ConvertFrom-UACValue", "Add-RemoteConnection", "Remove-
↪ RemoteConnection", "Invoke-UserImpersonation", "Invoke-RevertToSelf", "Request-
↪ SPNTicket", "Get-DomainSPNTicket", "Invoke-Kerberoast", "Get-PathAcl", "Get-
↪ DNSZone", "Get-DomainDNSZone", "Get-DNSRecord", "Get-DomainDNSRecord",
↪ "Get-NetDomain", "Get-Domain", "Get-NetDomainController", "Get-DomainController
↪ ", "Get-NetForest", "Get-Forest", "Get-NetForestDomain", "Get-ForestDomain", "Get-
↪ NetForestCatalog", "Get-ForestGlobalCatalog", "Find-DomainObjectPropertyOutlier",
↪ "Get-NetUser", "Get-DomainUser", "New-DomainUser", "Set-DomainUserPassword",
↪ "Get-UserEvent", "Get-DomainUserEvent", "Get-NetComputer", "Get-
↪ DomainComputer", "Get-ADObject", "Get-DomainObject", "Set-ADObject", "Set-
↪ DomainObject", "Get-ObjectAcl", "Get-DomainObjectAcl", "Add-ObjectAcl", "Add-
↪ DomainObjectAcl", "Invoke-ACLScanner", "Find-InterestingDomainAcl", "Get-NetOU",
↪ "Get-DomainOU", "Get-NetSite", "Get-DomainSite", "Get-NetSubnet", "Get-
↪ DomainSubnet", "Get-DomainSID", "Get-NetGroup", "Get-DomainGroup", "New-
↪ DomainGroup", "Find-ManagedSecurityGroups", "Get-DomainManagedSecurityGroup
↪ ", "Get-NetGroupMember", "Get-DomainGroupMember", "Add-DomainGroupMember
↪ ", "Get-NetFileServer", "Get-DomainFileServer", "Get-DFSshare", "Get-
↪ DomainDFSshare", "Get-NetGPO", "Get-DomainGPO", "Get-NetGPOGroup", "Get-
↪ DomainGPOLocalGroup", "Find-GPOLocation", "Get-
↪ DomainGPOUserLocalGroupMapping", "Find-GPOComputerAdmin", "Get-
↪ DomainGPOComputerLocalGroupMapping", "Get-DomainPolicy", "Get-NetLocalGroup
↪ ", "Get-NetLocalGroupMember", "Get-NetShare", "Get-NetLoggedon", "Get-
↪ NetSession", "Get-LoggedOnLocal", "Get-RegLoggedOn", "Get-NetRDPSession",
↪ "Invoke-CheckLocalAdminAccess", "Test-AdminAccess", "Get-SiteName", "Get-
↪ NetComputerSiteName", "Get-Proxy", "Get-WMIRegProxy", "Get-LastLoggedOn",
↪ "Get-WMIRegLastLoggedOn", "Get-CachedRDPConnection", "Get-
↪ WMIRegCachedRDPConnection", "Get-RegistryMountedDrive", "Get-
↪ WMIRegMountedDrive", "Get-NetProcess", "Get-WMIProcess", "Find-InterestingFile",
↪ "Invoke-UserHunter", "Find-DomainUserLocation", "Invoke-ProcessHunter", "Find-
↪ DomainProcess", "Invoke-EventHunter", "Find-DomainUserEvent", "Invoke-ShareFinder
```

(continues on next page)

- **Trigger Condition:** Execution of PowerShell commandlets of the popular PowerView module of the PowerSploit framework is detected. For the alert to work, the script block logging must be enabled.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** T1059 - Command and Scripting Interpreter, T1059.001 - PowerShell
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=4104 script_block IN ["Export-ViewCSV", "Get-
IPAddress", "Resolve-IPAddress", "Convert-NameToSid", "Convert-To-SID", "Convert-
ADName", "ConvertFrom-UACValue", "Add-RemoteConnection", "Remove-
RemoteConnection", "Invoke-UserImpersonation", "Invoke-RevertToSelf", "Request-
SPNTicket", "Get-DomainSPNTicket", "Invoke-Kerberoast", "Get-PathAcl", "Get-
DNSZone", "Get-DomainDNSZone", "Get-DNSRecord", "Get-DomainDNSRecord",
"Get-NetDomain", "Get-Domain", "Get-NetDomainController", "Get-DomainController",
"Get-NetForest", "Get-Forest", "Get-NetForestDomain", "Get-ForestDomain", "Get-
NetForestCatalog", "Get-ForestGlobalCatalog", "Find-DomainObjectPropertyOutlier",
"Get-NetUser", "Get-DomainUser", "New-DomainUser", "Set-DomainUserPassword",
"Get-UserEvent", "Get-DomainUserEvent", "Get-NetComputer", "Get-
DomainComputer", "Get-ADObject", "Get-DomainObject", "Set-ADObject", "Set-
DomainObject", "Get-ObjectAcl", "Get-DomainObjectAcl", "Add-ObjectAcl", "Add-
DomainObjectAcl", "Invoke-ACLScanner", "Find-InterestingDomainAcl", "Get-NetOU",
"Get-DomainOU", "Get-NetSite", "Get-DomainSite", "Get-NetSubnet", "Get-
DomainSubnet", "Get-DomainSID", "Get-NetGroup", "Get-DomainGroup", "New-
DomainGroup", "Find-ManagedSecurityGroups", "Get-DomainManagedSecurityGroup",
"Get-NetGroupMember", "Get-DomainGroupMember", "Add-DomainGroupMember",
"Get-NetFileServer", "Get-DomainFileServer", "Get-DFSshare", "Get-
DomainDFSshare", "Get-NetGPO", "Get-DomainGPO", "Get-NetGPOGroup", "Get-
DomainGPOLocalGroup", "Find-GPOLocation", "Get-
DomainGPOUserLocalGroupMapping", "Find-GPOComputerAdmin", "Get-
DomainGPOComputerLocalGroupMapping", "Get-DomainPolicy", "Get-NetLocalGroup",
"Get-NetLocalGroupMember", "Get-NetShare", "Get-NetLoggedon", "Get-
NetSession", "Get-LoggedOnLocal", "Get-RegLoggedOn", "Get-NetRDPSession",
"Invoke-CheckLocalAdminAccess", "Test-AdminAccess", "Get-SiteName", "Get-
NetComputerSiteName", "Get-Proxy", "Get-WMIRegProxy", "Get-LastLoggedOn",
"Get-WMIRegLastLoggedOn", "Get-CachedRDPConnection", "Get-
WMIRegCachedRDPConnection", "Get-RegistryMountedDrive", "Get-
WMIRegMountedDrive", "Get-NetProcess", "Get-WMIProcess", (continues on next page)
```

2.566. LP PowerView PowerShell Commandlets 267

(continued from previous page)

2.567 LP_Stealthy VSTO Persistence

- **Trigger Condition:** Modification of office products Addins and VSTO inclusion registry keys. By modifying the registry keys adversaries can execute their payload through a malicious addins. Registry Auditing is required.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** Add-ins, Office Application Startup
- **ATT&CK ID:** T1137.006, T1137
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Set target_object IN ["*\\Software\\Microsoft\\Office\\Outlook\\Addins\\*",
↳ "*\\Software\\Microsoft\\Office\\Word\\Addins\\*",
↳ "*\\Software\\Microsoft\\Office\\Excel\\Addins\\*",
↳ "*\\Software\\Microsoft\\Office\\Powerpoint\\Addins\\*",
↳ "*\\Software\\Microsoft\\VSTO\\Security\\Inclusion\\*" ] - "process" IN ["*\\msiexec.exe",
↳ "*\\regsvr32.exe", "*\\winword.exe", "*\\integrator.exe", "*\\OfficeClickToRun.exe",
↳ "*\\teams.exe", "C:\\Program Files\\AVG\\Antivirus\\RegSvr.exe"]
```

2.568 LP_Suspicious VMToolsd Child Process

- **Trigger Condition:** Creation of suspicious child process VMware Tools process, which may indicate persistence set up by attackers.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** Command and Scripting Interpreter
- **ATT&CK ID:** T1059
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WinServer event_id=4688 parent_process="*\\vmtoolsd.exe" image IN ["*\\cmd.exe",
↳ "*\\powershell.exe", "*\\wscript.exe", "*\\cscript.exe", "*\\rundll32.exe", "*\\regsvr32.exe",
↳ "*\\VMware\\VMware Tools\\poweron-vm-default.bat*",
↳ "*\\VMware\\VMware Tools\\poweroff-vm-default.bat*", "*\\VMware\\VMware Tools\\resume-vm-default.bat*",
↳ "*\\VMware\\VMware Tools\\suspend-vm-default.bat*"]
```

(continues on next page)

(continued from previous page)

2.569 LP_Suspicious WMPRVSE Child Process

- **Trigger Condition:** Uncommon or suspicious child process of the legitimate Windows Management Instrumentation Provider Service is detected. *WmiPrvse.exe* is a process in the Windows operating system that can host one or more WMI providers. Adversaries may leverage WMI to execute commands and perform various tasks, such as evading detection or bypassing a target system's security controls.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Windows Management Instrumentation, Malicious File, Regsvr32
- **ATT&CK ID:** T1047, T1204.002, T1218.010
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (parent_process = "\\wmpvse.exe" ("process" IN [
  ↳ "\\certutil.exe", "\\cscript.exe", "\\mshta.exe", "\\msiexec.exe", "\\regsvr32.exe",
  ↳ "\\rundll32.exe", "\\verclsid.exe", "\\wscript.exe"]) OR ("process" = "\\cmd.exe"
  ↳ command IN ["\\cscript*", "\\mshta*", "\\powershell*", "\\pwsh*", "\\regsvr32*", "\\rundll32*",
  ↳ "\\wscript*"])) - "process" IN ["\\conhost.exe", "\\WMIC.exe", "\\WerFault.exe",
  ↳ "\\wmpvse.exe"])
```

2.570 LP_TerraMaster TOS CVE-2020-28188 Exploitation

- **Trigger Condition:** The exploitation of the TerraMaster TOS vulnerability CVE-2020-28188 is detected. CVE-2020-28188 is a remote command execution (RCE) vulnerability in TerraMaster TOS <= v4.2.06 that allows remote unauthenticated attackers to inject OS commands.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** T1190 - Exploit Public-Facing Application
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=GET url="*/include/makecvs.php*" url="*?Event=*" url IN [
↪ "*curl*", "*wget*", "*.py*", "*.sh*", "*chmod*", "*_GET*"]
```

2.571 LP_VMware VSphere CVE-2021-21972 Exploitation

- **Trigger Condition:** The exploitation of VSphere Remote Code Execution vulnerability CVE-2021-21972 is detected.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** T1190 - Exploit Public-Facing Application
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=POST url="*/ui/vropspluginui/rest/services/uploadova*"
```

2.572 LP_VMware View Planner CVE-2021-21978 Exploitation

- **Trigger Condition:** The exploitation of the VMware View Planner vulnerability CVE-2021-21978 is detected. CVE-2021-21978 is a flaw due to proper input validation and lack of authorization leading to arbitrary file upload in Log Upload web applications.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** T1190 - Exploit Public-Facing Application
- **Minimum Log Source Requirement:** Firewall, Proxy Server
- **Query:**

```
norm_id=* request_method=POST url="*/logupload*" url="*/logMetaData*" url="*/wsgi_
↪ log_upload.py*"
```

2.573 LP_Zoho ManageEngine ADSelfService Plus CVE-2021-40539 Exploitation

- **Trigger Condition:** The REST API authentication bypass vulnerability (CVE-2021-40539) in Zoho ManageEngine ADSelfService Plus (v6113 and prior) is detected. For the detection to work, Administrators must fetch logs from the `\ManageEngine\ADSelfService Plus\logs` path.
- **ATT&CK Category:** Initial Access, Persistence
- **ATT&CK Tag:** Exploit Public-Facing Application, Web Shell
- **ATT&CK ID:** T1190, T1505.003
- **Minimum Log Source Requirement:** Web Server
- **Query:**

```
url=* url IN ["*/help/admin-guide/Reports/ReportGenerate.jsp*", "*/RestAPI/LogonCustomization*", "*/RestAPI/Connection*"]
```

2.574 LP_Possible Access to ADMIN Share

- **Trigger Condition:** Access to \$ADMIN share that may help detect lateral movement attempts. Since Windows Admin Share activity is so common, it provides adversaries with a powerful, discreet way to move laterally within an environment. Legitimate administrative activities may generate false positives and will require whitelisting.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** SMB/Windows Admin Shares
- **ATT&CK ID:** T1021.002
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=5140 share_name="Admin$" -user IN EXCLUDED_USERS
```

2.575 LP_PsExec Tool Execution Detected

- **Trigger Condition:** PsExec service installation and execution events (service and Sysmon) are detected.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** System Services, Service Execution
- **ATT&CK ID:** T1569, T1569.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(norm_id=WinServer service="PSEXESVC" (event_id=7045 event_source="Service
→ Control Manager" file="PSEXESVC.exe") OR (event_id=7036)) OR (norm_
→ id=WindowsSysmon ((event_id=11 file="PSEXESVC.exe") OR (event_id IN [17, 18] pipe=
→ "PSEXESVC*"))))
```

2.576 LP_Screensaver Activities Detected

- **Trigger Condition:** Adversaries's modification of registry key containing the path to binary used as screensaver executable is detected to establish persistence.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1546 - Event Triggered Execution, T1546.002 - Screensaver
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon (event_id=12 or event_id=13 or event_id=14) (target_object=
→ "*\Control Panel\Desktop\SCRNSAVE.exe") (parent_command!="*explorer.exe" or
→ image!="*rundll32.exe" or command!="*shell32.dll, Control_RunDLL desk.cpl,
→ ScreenSaver, *") -user IN EXCLUDED_USERS
```

2.577 LP_Suspect Svchost Activity Detected

- **Trigger Condition:** Scvhost activity is detected. It is abnormal for svchost.exe to spawn without any CLI arguments and is normally observed when a malicious process spawns the process and injects code into the process memory space.

- **ATT&CK Category:** Privilege Escalation, Defense Evasion
- **ATT&CK Tag:** T1055 - Process Injection
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 image="*\svchost.exe" parent_image=* -parent_
↪ image IN ["*\rpcnet.exe", "*\rpcnetp.exe", "*\svchost.exe", "*\Mrt.exe", "*\MsMpEng.
↪ exe"] command=* command="*\svchost.exe" -user IN EXCLUDED_USERS
```

2.578 LP_Time-Stomping of Users Directory Files Detected

- **Trigger Condition:** Time-stomping of user directory file is detected. Sysmon can only detect a change of CreationTime and not LastWriteTime and LastAccessTime. Whitelisting legitimate noisy processes like browsers, Slack, or Teams are required to reduce false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1070 - Indicator Removal on Host, T1070.006 - Timestomp
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=2 path="C:\Users*" -source_image IN ["*iexplore.exe
↪ ", "*cortana*", "StartMenuExperienceHost.exe", "C:\Windows\system32\cleanmgr.exe
↪ ", "C:\Windows\Explorer.EXE", "LocalBridge.exe", "svchost.exe", "RuntimeBroker.
↪ exe", "msedge.exe", "SearchApp.exe", "C:\Windows\system32\ServerManager.exe
↪ ", "ServiceHub.RoslynCodeAnalysisService32.exe"] -path=
↪ "AppData\Roaming\Microsoft\Windows\Recent\CustomDestinations" -user IN
↪ EXCLUDED_USERS
```

2.579 LP_Windows Defender Exclusion Set Detected

- **Trigger Condition:** Added Windows Defender exclusion in the registry where an entity bypasses antivirus scanning from Windows Defender.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1562 - Impair Defenses, T1562.001 - Disable or Modify Tools

- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_source="Microsoft-Windows-Windows Defender" event_
↪ id=5007 new_value="HKLM\SOFTWARE\Microsoft\Windows Defender\Exclusions\*
```

2.580 LP_Suspicious Netsh DLL Persistence Detected

- **Trigger Condition:** Detects persistence via Netsh Helper.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** Netsh Helper DLL
- **ATT&CK ID:** T1546.007
- **Minimum Log Source Requirement:** Window Sysmon, Windows
- **Query:**

```
(label=Registry label=Set label=Value target_object="*\SOFTWARE\Microsoft\Netsh\*")
↪ OR (label="process" label=create "process"="*\netsh.exe" command="*add*"
↪ command="*helper*")
```

2.581 LP_Usage of Procdump Detected

- **Trigger Condition:** Suspicious use of the SysInternals ProcDump utility tool is detected.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** OS Credential Dumping, LSASS Memory
- **ATT&CK ID:** T1003, T1003.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" "process" IN ["*\procdump.exe", "*\procdump64.exe"]
↪ command IN ["*-ma*", "*/ma*"]
```

2.582 LP_Conhost Spawning Suspicious Processes

- **Trigger Condition:** *conhost.exe* spawns other processes.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indirect Command Execution
- **ATT&CK ID:** T1202
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label="Process" label="Create" "parent_process"="*\conhost.exe" "process"=*
```

2.583 LP_Proxy Execution via Explorer

- **Trigger Condition:** Use of explorer for proxy execution of arbitrary commands. Explorer is a Microsoft Windows GUI shell used for task-based file management system. Adversaries can use explorer for proxy execution of arbitrary commands or processes, evading defense mechanisms. However, simple explorer launch from command line can trigger false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indirect Command Execution
- **ATT&CK ID:** T1202
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="Create" "parent_process"="*\cmd.exe" "process"="*\explorer.exe"
↪ "command"="*explorer*"
```

2.584 LP_Wlrmldr Lolbin Use as Launcher

- **Trigger Condition:** *wlrmldr.exe* is used to proxy launch other executables.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indirect Command Execution

- **ATT&CK ID:** T1202
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label="process" "process"="*\wlrmdr.exe" - "parent_process"="*\winlogon.exe"
↪ command IN ['*-s *', '*-f *', '*-t *', '*-m *', '*-a *', '*-u *']
```

2.585 LP_Suspicious Process Execution via Pester Detected

- **Trigger Condition:** Execution of code via *Pester.bat*. The Pester is a Powershell module for testing purposes. Adversaries can use *Pester.bat* to execute other processes. Still, sometimes, legitimate use of a Pester for writing tests for Powershell scripts and modules could trigger false positives.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" (("process"="*\powershell.exe" command="*Pester*
↪ " command="*Get-Help*") OR ("process"="C:\Windows\System32\cmd.exe"
↪ command="*pester*" command="*,*" command IN ["*help*", "*?*"])))
```

2.586 LP_Root Certificate Installation Detected

- **Trigger Condition:** Adversaries may install a root certificate on a compromised system to avoid warnings when connecting to adversary-controlled web servers. This alert can detect the installation of a root certificate.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Install Root Certificate
- **ATT&CK ID:** T1553.004

- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="Create" label="Process" event_source="Microsoft-Windows-Sysmon"
↪ command="*root*" ("process"="C:\Windows\System32\certutil.exe" command=
↪ "*-addstore*") OR ("process"="*\CertMgr.exe" command="*/add*") | norm on
↪ command <certificate:'\S+.cer'>
```

2.587 LP_Suspicious process spawned by FTP

- **Trigger Condition:** Manipulation of *ftp.exe* to spawn a new process for file transfer. The alert detects renamed *ftp.exe*, *ftp.exe* script execution, and child processes run by *ftp.exe*.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** Command and Scripting Interpreter, Indirect Command Execution
- **ATT&CK ID:** T1059, T1202
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="create" label="process" ((command="*-s:*" ("process"="*\ftp.exe" OR file=
↪ "*ftp.exe*")) OR (file="*ftp.exe*" - "process"="*\ftp.exe") OR parent_process=
↪ "*\ftp.exe")
```

2.588 LP_Chromeloder Cross-Process Injection to Load Extension

- **Trigger Condition:** Chromeloder uses process injection using PowerShell and loads the malicious extension in Chrome.
- **ATT&CK Category:** Execution, Persistence, Privilege Escalation
- **ATT&CK Tag:** Process Injection, PowerShell, Browser Extensions
- **ATT&CK ID:** T1055, T1059.001, T1176
- **Minimum Log Source Requirement:** -

- **Query:**

```
label="Process" label=Create parent_process="*powershell" parent_command = "*-exe* byp*"
↪ -win* hid* -e* JAB* command IN ["*--load-extension=*", "*Appdata\\local\\chrome*"]
↪ "process" = "*chrome"
```

2.589 LP_Proxy Execution via Explorer

- **Trigger Condition:** When Explorer is used to proxy execution. Explorer is a Microsoft Windows GUI shell used for task-based file management systems. Adversaries uses Explorer to proxy the execution of other commands or processes, evading defense mechanisms.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indirect Command Execution
- **ATT&CK ID:** T1202
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=Create "process"="*\\explorer.exe" "command"="*explorer*"
```

2.590 LP_Suspicious Root Certificate installation Detected

- **Trigger Condition:** Installation of a root certificate. Adversaries may install a root certificate on a compromised system to avoid warnings when connecting to adversary-controlled web servers. Still, sometimes, the Help Desk or IT may need to manually add a corporate Root CA. So, they need to test if the GPO push doesn't trigger a false positive.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Install Root Certificate
- **ATT&CK ID:** T1553.004
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="create" label="process" (command="*root*" (("process"="*\certutil.exe" command=
↪ "*-addstore*") OR ("process"="*\CertMgr.exe" command="*/add*"))))
```

2.591 LP_Windows Logon Reminder Usage as Launcher

- **Trigger Condition:** Manipulation of *Wlrmldr* to proxy launch other executables. *Wlrmldr* (Windows Logon Reminder) is a Microsoft Windows Binary used by Microsoft to display messages when logging in. Adversaries generally use *Wlrmldr* to pass parameters to *ShellExecute*.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indirect Command Execution
- **ATT&CK ID:** T1202
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\wlrmldr.exe" -"parent_process"="*\winlogon.exe" [?]
↪ command IN ['*-s *', '*-f *', '*-t *', '*-m *', '*-a *', '*-u *']
```

2.592 LP_Suspicious File Transfer Using Replace

- **Trigger Condition:** *Replace* is used to transfer (copy or download files) files. *Replace.exe* is a Microsoft Windows executable that allows replacing existing or adding new files in a directory if used with the */a* option. Adversaries uses the *replace* process to silently download or copy files in the target system.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\replace.exe" command IN ["*/a*", "*-a*"]
```

2.593 LP_Proxy Execution via Program Compatibility Wizard

- **Trigger Condition:** Pcwrn process is used to initiate a proxy execution. Pcwrn is a Microsoft Windows Operating System file used to invoke Program Compatibility Troubleshooter/Wizard. Adversaries uses pcwrn to proxy the execution of other commands, processes, or executables in order to evade defense mechanisms. However, the specific focus needs to be on outlier events, for example unique counts, instead of commonly seen artifacts to prevent false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label=create label="process" parent_process="*\pcwrn.exe"
```

2.594 LP_Suspicious Driver Installation via PnPUtl

- **Trigger Condition:** Pnputil process is used to install or add drivers. PnPUtl is a Microsoft Windows process that lets an administrator perform actions on driver packages. Adversaries uses pnputil to install or add malicious drivers. Anyone who uses pnputil.exe who is not a system administrator should be investigated, even when they have system change permissions.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1547 - Boot or Logon Autostart Execution, T1547.006 - Kernel Modules and Extensions
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\pnputil.exe" command IN ["*-i*", "*/install*", "*-a*", "*/add-driver*", "*.inf*"]
```

2.595 LP_Application Whitelisting Bypass via PresentationHost

- **Trigger Condition:** Presentationhost process is used to execute browser applications. Presesntationhost is a Microsoft Windows application that enables the hosting of WPF applications in compatible browsers (including Microsoft Internet Explorer 6 and later). Adversaries uses presentationhost.exe to evade application whitelisting and execute malicious XAML Browser Application (XBAP) files.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\presentationhost.exe" command="*.xbap"
```

2.596 LP_Suspicious File Extraction via Expand Detected

- **Trigger Condition:** Expand process is used for file transfer (copy or download files). Expand is a Microsoft Windows binary file provided by Microsoft that can extract one or more compressed files and retrieve them from distribution disks. Adversaries uses expand to silently download or copy files into the target system or location.
- **ATT&CK Category:** Defense Evasion, Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer, T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\expand.exe" command IN ["*.cab*", "*/F:*", "*/F:*  
↪", "*/C:\ProgramData\*", "*/C:\Public\*", "*/AppData\Local\Temp\*",  
↪ "*/AppData\Roaming\Temp\*"]
```

2.597 LP_Suspicious Use of Extrac32 Detected

- **Trigger Condition:** Suspicious file overwrite using `extrac32.exe` is detected.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer
- **ATT&CK ID:** T1105
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Create" label="Process" "process"="*\extrac32.exe" command="*\extrac32*"
↪command IN ["*/C*", "*/Y*", "*/\\*"]
```

2.598 LP_Shell spawn via HTML Help Detected

- **Trigger Condition:** *Hh* (HTML Help) spawns shell processes. *Hh.exe* is a Microsoft Windows executable program that allows developers to compile .chm file(s) with expanding tables of contents, shortcuts, keyword search, and pop-up topics. Adversaries uses *Hh* as a target for overwriting and executing their malicious commands, spawning other processes.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** T1047 - Windows Management Instrumentation, T1218.001 - Compiled HTML File
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create parent_process="*\hh.exe" "process" IN ["*\cmd.exe",
↪ "*/powershell.exe", "*/wscript.exe", "*/cscript.exe", "*/regsvr32.exe", "*/wmic.exe",
↪ "*/rundll32.exe"]
```

2.599 LP_DLL Injection with Tracker Detected

- **Trigger Condition:** DLL injection with the tracker process is detected. *Tracker.exe* is a legitimate internal Windows binary file required to incrementally generate resources like building on a 64-bit OS using 32-bit MSBuild. Adversaries can use it

to bypass application whitelisting solutions by proxy execution of an arbitrary DLL into another process.

- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1055.001 - Dynamic-link Library Injection
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="create" label="process" (("process"="*\tracker.exe" OR description="Tracker")  
↪command="*/d*" command="*/c*")
```

2.600 LP_Powershell Code Execution via SyncAppvPublishingServer

- **Trigger Condition:** Arbitrary Powershell command is executed via SyncAppvPublishingServer. VBScript files, such as SyncAppvPublishingServer.vbs, are trusted scripts, often signed with certificates. Adversaries can use SyncAppvPublishingServer.vbs to proxy execute PowerShell code.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1216 - Signed Script Proxy Execution, T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label='create' label='process' command='*\SyncAppvPublishingServer.vbs*' command='*,*'
```

2.601 LP_Malicious PE Execution by Microsoft Visual Studio Debugger

- **Trigger Condition:** Arbitrary Powershell command is executed via SyncAppvPublishingServer. VBScript files, such as SyncAppvPublishingServer.vbs, are trusted scripts, often signed with certificates. Adversaries can use SyncAppvPublishingServer.vbs to proxy execute PowerShell code.
- **ATT&CK Category:** Defense Evasion

- **ATT&CK Tag:** T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Create" label="Process"(parent_process="*\vsjitdebugger.exe" -(("process"=
↪ ".*\vsimmersiveactivatehelper*.exe" OR "process"=".*\devenv.exe")))
```

2.602 LP_Suspicious Atbroker Registry Change Detected

- **Trigger Condition:** Creation or modification of Assistive Technology (AT) registry value is detected. Atbroker is a Windows internal helper binary that provides accessibility tools like screen readers, speech input and text readers, people with disabilities use to accomplish tasks. Adversaries can modify the assistive technology registry value and include their malicious application to maintain persistence.
- **ATT&CK Category:** Persistence, Defense Evasion
- **ATT&CK Tag:** T1218 - Signed Binary Proxy Execution, T1547 - Boot or Logon Autostart Execution
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon label=Registry label=Set target_object IN [
↪ ".*\Software\Microsoft\Windows NT\CurrentVersion\Accessibility\ATs*",
↪ ".*\Software\Microsoft\Windows NT\CurrentVersion\Accessibility\Configuration*"]
```

2.603 LP_DLL loaded Via Certoc Binary Detected

- **Trigger Condition:** DLL loading is detected using certoc binary. Certoc is Windows internal binary used to install certificates, but it also has a feature to load a DLL by LoadDll tag. Adversaries can use certoc binary to load their malicious DLL even when they don't have the relevant access rights.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon

- **Query:**

```
label="Process" label=Create command="*certoc.exe*" command IN ["* -LoadDll *", "* /
↪LoadDll *"] command="*.dll*"
```

2.604 LP_Suspicious Remote Binary Usage Detected

- **Trigger Condition:** remote.exe binary is used to bypass application whitelisting and execute or run a local or remote file. Remote.exe is a Windows binary server/client tool that allows users to run command-line programs on remote computers. Adversaries can use the remote.exe binary to spawn a new Powershell session, AWL bypass, and execute other commands.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1127 - Trusted Developer Utilities Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label="Create" "process"="*\remote.exe" command="*/s *"
```

2.605 LP_Suspicious ASP NET Compiler Execution Detected

- **Trigger Condition:** A file with the extension .jse, .vbe, .js, or .vba is executed using wscript or cscript. Wscript and cscript are Windows binaries that provide an environment in which users can execute scripts in various languages or start a script to run in a command-line environment. Adversaries can code malicious scripts in .jse, .vbe, .js, or .vba files and execute them using wscript or cscript and bypass detection.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1127 - Trusted Developer Utilities Proxy Execution
- **Minimum Log Source Requirement:** -
- **Query:**

```
label=Create label="Process" "process" = "C:\Windows\Microsoft.NET\Framework*" "process"
↳ "*"aspnet_compiler.exe"
```

2.606 LP_Suspicious LoadAssembly PowerShell Diagnostic Script Execution

- **Trigger Condition:** Microsoft signed script is used to execute commands and bypass AppLocker. CL_LoadAssembly.ps1, a windows native diagnostic script, provides two functions (LoadAssemblyFromNS and LoadAssemblyFromPath) for loading .NET/C# assemblies (DLLs/EXEs). An attacker can bypass Constrained Language mode by invoking PowerShell version 2 (Note: this must be enabled) and bypass AppLocker by loading an assembly through CL_LoadAssembly.ps1.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1216 - Signed Script Proxy Execution
- **Minimum Log Source Requirement:** -
- **Query:**

```
command IN ["*\CL_LoadAssembly.ps1", "*LoadAssemblyFromPath*"] "Process" =
↳ "*"powershell.exe"
```

2.607 LP_Suspicious Invocation PowerShell Diagnostic Script Execution

- **Trigger Condition:** The execution of malicious payloads via SyncInvoke in CL_Invocation.ps1 module is detected. CL_Invocation is a PowerShell Diagnostic script, but an attacker can import it and then call SyncInvoke to launch a malicious executable.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1216 - Signed Script Proxy Execution
- **Minimum Log Source Requirement:** -
- **Query:**

```
command IN ["*\CL_Invocation.ps1", "*SynclInvoke*"] "Process"="*\powershell.exe"
```

2.608 LP_Registry Configured RunOnce Task Execution

- **Trigger Condition:** The RunOnce task executes as configured in the registry. Runonce.exe is a Microsoft Windows Operating System component called the *Run Once Wrapper Utility* that allows the installation program to reboot after initial start up to enable the user to make further configurations. Adversaries uses the runonce executable to evade defense mechanisms while running their programs/code through registry entries in the host machine.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1112 - Modify Registry
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\runonce.exe" command="* /AlternateShellStartup*
↪ "
```

2.609 LP_RunOnce Registry Key Configuration Change

- **Trigger Condition:** When the configuration of Run Once registry key is changed. Runonce.exe is a Microsoft Windows Operating System component called the *Run Once Wrapper Utility* that allows the installation program to reboot after initial start up to enable the user to make further configurations. Adversaries uses/changes the runonce registry key values to evade defense mechanisms while running their programs/code in the host machine.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1112 - Modify Registry
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="process" label=create "process"="*\runonce.exe" command="* /AlternateShellStartup*
↪ "
```

2.610 LP_Suspicious WSL Bash Execution

- **Trigger Condition:** When bash is used to execute the Linux command. Bash is a Unix shell and command language. Adversaries can use bash to execute a specified file or commands in the Windows subsystem for Linux and can be used as a defensive evasion mechanism. Executing programs using bash can trigger this alert, so alerts must be further analyzed to determine legitimate or illegitimate use.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1202 - Indirect Command Execution
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" command="*bash* -c *
```

2.611 LP_WSL Execution Detected

- **Trigger Condition:** When Windows subsystem for Linux (WSL) binary is used to execute Linux commands. WSL is a compatibility layer that allows running Linux binaries in Windows. Adversaries can use the wsl binary to execute Windows and Linux binaries, execute arbitrary Linux commands as root without a password or download files.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Indirect Command Execution
- **ATT&CK ID:** T1202
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" "process"="*\wsl.exe" command in ["*-e *", "--exec *"]
```

2.612 LP_Suspicious Usage of Csharp or Roslyn Csharp Interactive Console

- **Trigger Condition:** Usage of csi and rcsi binary are detected. Adversaries can use these binaries to execute their malicious C# code.

- ```
label="Create" label="Process" ("process" IN ["*\csi.exe", "*\rcsi.exe"]) OR (file in ["csi.exe",
↪ "rcsi.exe"])
```

- ```
label="Process" label=Create ((parent_label="*\\cmd.exe" parent_command IN ["*^*^*^*^*^*^*",
"*set*=%call*%*%*", 's^e^t*']) OR (command IN ["*?*", "?*", "?*", "?*", "?*", "?*",
"*_*", "*a*", "*€*", "*f*", "*~*", "*@*", "*μ*", "*¶*"])))
```

- ## 2.613. LP Possible Commandline Obfuscation Detected 289

- **Query:**

```
label="Process" label=Create (command IN ["* -e* PAA*",
↪ "*JABIAG4AdgA6AHUAcwBIAHIAcABYAG8AZgBpAGwAZQ*",
↪ "*QAZQBuAHYAOgB1AHMAZQByAHAAcgBvAGYAaQBsaGUA*",
↪ "*kAGUAbgB2ADoAdQBzAGUAcgBwAHIAbwBmAGkAbABIA*",
↪ "*IgAoACcAKgAnACkAOwAkA*", "*IAKAAnACoAJwApADsAJA*",
↪ "*iACgAJwAqACcAKQA7ACQA*", "*JABGAGwAeABYAGgAYwBmAGQ*"]) (-command IN [
↪ "fAAgAEMAbwBuAHYAZQByAHQAVABvAC0ASgBzAG8AbgAgAC0ARQByAHIAbwByAEEAYwB0AGkAbwBu",
↪ ",
↪ "wAIABDAG8AbgB2AGUAcgB0AFQAbwAtAEoAcwBvAG4AIAAtAEUAcgByAG8AcgBBAGMAdABpAG8AbgA",
↪ ",
↪ "8ACAAQwBvAG4AdgBIAHIAdABUAG8ALQBKAHMABwBuACAALQBFAHIAcgBvAHIAQQBjAHQAaQBvAG",
↪ ""]) -user IN EXCLUDED_USERS
```

2.615 LP_Suspicious Use of Control Panel Items

- **Trigger Condition:** Malicious use of a control panel item is detected.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Control Panel
- **ATT&CK ID:** T1218.002
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create (((("process"="*\reg.exe" OR file="reg.exe") command="*add*"
↪ command="*CurrentVersion\Control Panel\CPLs*") OR (command="*.cpl" -(command IN [
↪ "*\System32\*", "%System%*"] OR (command="*regsvr32 *" command="*/s *" command=
↪ "*igfxCPL.cpl*")))))
```

2.616 LP_Suspicious Use of Colorcpl Detected

- **Trigger Condition:** Suspicious usage of colorcpl binary such as execution from non default path and creation of unusual files are detected.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1574.001 - DLL Search Order Hijacking
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

- **Query:**

```
(label="Process" label="Create" -"process"="C:\Windows\System32\colorcpl.exe" "process"=
↪"*\colorcpl.exe") OR (norm_id=WindowsSysmon event_id=11 image="*\colorcpl.exe" file In [
↪"*\.icm", "*\.gmmp", "*\.cdmp", "*\.camp"])
```

2.617 LP_Suspicious File Download via Certreq

- **Trigger Condition:** When a file is downloaded using certreq binary. Certreq is a Windows binary used to manage and request a certificate from the certificate authority. Adversaries can use certreq to download payload from their C2 server.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "process"="*\certreq.exe" command="*\certreq*" command
↪IN ["* -Post *", "/Post *"] command IN ["* -config *", "/config *"] command="* http*"
↪command="* C:\windows\win.ini *
```

2.618 LP_Process Dump via Rundll32 and Comsvcs

- **Trigger Condition:** When LSASS dump using Rundll32 with Comsvcs DLL is detected. Rundll32.exe is a Windows binary that loads and runs 32-bit dynamic-link libraries. comsvcs.dll is a DLL file used by COM+ Services created by Microsoft. Adversaries can use the binary and DLL to dump the LSASS process.
- **ATT&CK Category:** Defense Evasion, Credential Access
- **ATT&CK Tag:** LSASS Memory, Rundll32
- **ATT&CK ID:** T1003.001, T1218.011
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create ("process"="*\rundll32.exe" or file="RUNDLL32.EXE")
↪ command="*comsvcs*" command="*full*" command IN ["*#-*", "*#+*", "*#24*", "*24 *",
↪ "*MiniDump*"]
```

2.619 LP_Registry Key Import Detected

- **Trigger Condition:** When registry key import is detected via regedit.exe. Regedit is a Windows binary to access and manipulate the Windows registry. This hierarchical database stores low-level settings for the Microsoft Windows operating system and applications that opt to use the registry. A registry key is an organizational unit in the Windows registry. Adversaries can use Regedit to import their malicious registry key to achieve persistence.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1112 - Modify Registry
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label="Create" "process"="*\regedit.exe" OR file="regedit.exe" command
↪ IN ["*/i *", "*/i *"] command="*.reg*" -command IN ["*/e *", "*/a *", "*/c *", "*/e *", "*/a *", "*/_
↪ c *"]
```

2.620 LP_Suspicious MachineGUID Query Detected

- **Trigger Condition:** When reg.exe is used to detect query machine GUID. Reg.exe is a Windows binary that performs operations on registry subkey information and values in registry entries. MachineGUID is a unique identifier for a machine. Adversaries can use this technique to get MachineGuid information. Also, ransomware abuses this technique to keep track of infected systems using a unique ID.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** T1082 - System Information Discovery
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label="Create" "process"="*reg.exe" command="* query *" command=
↳ "*SOFTWARE\Microsoft\Cryptography*" command IN ["*/v *", "*-v *"] command=
↳ "*MachineGuid*"
```

2.621 LP_Process Injection Via Mavinject Detected

- **Trigger Condition:** When DLL is injected into a running process. Microsoft Application Virtualization Injector (Mavinject) is a Windows utility that can inject code into external processes as part of Microsoft Application Virtualization (App-V). Adversaries can use mavinject to inject malicious DLL to obtain arbitrary code execution.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218.013 - Mavinject
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="Process" label="Create" "process"="*\mavinject.exe" command IN ["*/injectrunning*",
↳ "* -injectrunning*", "*.dll*"]
```

2.622 Possible File Transfer Using Finger Detected

- **Trigger Condition:** When the execution of Finger.exe is detected. It is a simple Windows binary that displays user information on a specified remote computer running the Finger service or daemon. It can be abused as a data transfer tool and makeshift C2 channel. However, general administrative use can trigger false positives, but it is still unclear why they use finger.exe.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="create" "process"="*\finger.exe"
```

2.623 LP_Suspicious Use of Findstr Detected

- **Trigger Condition:** When suspicious actions such as credential access, file download, or creation of alternate data stream using findstr are detected. Generally, it is used to search for strings in files or to filter command line output. Adversaries can exploit it for defense evasion. However, general administrative use of findstr can trigger false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218 - Signed Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="create" label="process" "process"="*\findstr.exe" command="*findstr*" ((command=
↪ "*/V*" command="*/L*") OR (command="*/S*" command="*/I*"))
```

2.624 LP_Suspicious File Overwrite Using extrac32 Detected

- **Trigger Condition:** Suspicious actions such as credential access, file download, or creation of alternate data stream using findstr are detected. Generally, it is used to search for strings in files or to filter command line output. Adversaries can exploit it for defense evasion. However, general administrative use of findstr can trigger false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution
- **ATT&CK ID:** T1218
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="create" label="process" "process"="*\findstr.exe" command="*findstr*" ((command=
↪ "*/V*" command="*/L*") OR (command="*/S*" command="*/I*"))
```

2.625 LP_Suspicious Sysmon Driver Unload Detected

- **Trigger Condition:** Suspicious unload of SysmonDrv Filter Driver. *Fltmc.exe* program is a system-supplied command line utility for mini-filter driver management operations. Adversaries can abuse its functionality to unload the filter driver, which can affect the sysmon and stop from collecting the data.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Impair Defenses, Disable Windows Event Logging
- **ATT&CK ID:** T1562, T1562.002
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="create" "process"="*\fltmc.exe" command="*unload*" command =
↪ "*sys*"
```

2.626 LP_Suspicious Execution via IE per User Utility

- **Trigger Condition:** When ie4uinit is executed from unusual file directories. ie4uinit.exe (Internet Explorer (for) Each User Initialization) file is a software component of Internet Explorer by Microsoft Corporation. Adversaries generally abuse ie4uinit.exe to overwrite malicious programs on it and spread them via the internet to execute them on target machines as legitimate processes.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Signed Binary Proxy Execution
- **ATT&CK ID:** T1218
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="create" ("process"="*\ie4uinit.exe" OR file="ie4uinit.exe") -(path IN [
↪ "C:\Windows\System32\","C:\Windows\SysWOW64\"])
```

2.627 LP_Proxy Execution via xWizard

- **Trigger Condition:** When the execution of the xWizard tool with runwizard and CLSID arguments are utilized to achieve proxy execution. xWizard is Windows internal binary used to run the Windows component object model (COM). COM is operated to enable inter-process communication. Class ID (CLSID) is a unique number representing a single application component in windows. Adversaries can bypasses the defense mechanism by proxying the execution of malicious content via xWizard.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218 - System Binary Proxy Execution
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\xwizard.exe" | process regex("(?P<new_
↪command>{\w{8}-\w{4}-\w{4}-\w{4}-\w{12}})",command) | filter new_command=*
```

2.628 LP_Suspicious MSHTA Process Pattern

- **Trigger Condition:** Suspicious *mshta.exe* process patterns, such as binary run from a non-default path, *mshta.exe* binary masquerading as different binary, and execution of HTML application (HTA) masquerading as non-HTA file are detected. *Mshta.exe* is a utility that executes HTA files. HTAs are standalone applications based on HTML and VBScript that can access local system resources, run scripts and display dynamic content. Adversaries may abuse *mshta.exe* to evade defense by proxy, executing malicious files and Javascript or VBScript through a trusted Windows utility.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** Mshta, Native API
- **ATT&CK ID:** T1218.005, T1106
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\mshta.exe" OR file="MSHTA.EXE") ((parent_
↪process IN ["*\cmd.exe", "powershell.exe", "pwsh.exe", "regsvr32.exe", "rundll32.exe",
↪"*\wscript.exe" ] OR command IN ["*\AppData\Local*", "C:\Windows\Temp*",
↪"C:\Users\Public*"]) OR ((-process IN ["C:\Windows\System32*",
↪"C:\Windows\SysWOW64*"] ) OR (-command IN ["mshta.exe", "mshta" ] -command IN [
↪htm*", ".hta*" ])) (command IN ["*\AppData\Local*", "C:\Windows\Temp*",
↪"C:\Users\Public*"] )
```

(continues on next page)

(continued from previous page)

2.629 LP_COM Object Execution via Shell Extension CLSID Verification Host

- **Trigger Condition:** When verclsid.exe is used to run COM object via GUID. Verclsid.exe (Verify COM Shell Extension CLSID) is a Microsoft Windows Native Shell Extension CLSID (Class ID) verification host responsible for verifying each shell extension before Windows Explorer or the Windows Shell uses them. Adversaries may abuse verclsid.exe to execute malicious payloads-COM Scriptlets, by running verclsid.exe and referencing files by Class ID (CLSID), a unique identification number used to identify COM objects.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\verclsid.exe" command="*/C*" command="*/S*"
↪ "
```

2.630 LP_Suspicious Setup Information File Invoked via DefaultInstall

- **Trigger Condition:** When InfDefaultInstall.exe is used to install an INF file. InfDefaultInstall.exe is a Microsoft Windows native tool invoked when an INF (Setup Information) file is selected to install. Adversaries uses InfDefaultInstall to install on the target system through maliciously crafted INF files.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1562.001 - Disable or Modify Tools
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\InfDefaultInstall.exe" command=
↪ "InfDefaultInstall*" command="*.inf"
```

2.631 LP_Creation of Alternate Data Stream

- **Trigger Condition:** When an alternate data stream is created. Alternate Data Stream (ADS) is the ability of an NTFS file system to store different streams of data, in addition to the default stream, which is used for a file. Attackers can leverage a little-known compatibility feature to hide hacking tools, keyloggers, and other malware on a compromised system and subsequently execute them undetected. Also, it can be used for data exfiltration. The alert requires the ADS_FILE_EXTENSIONS list to work.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1564.004 - NTFS File Attributes
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
(label="create" label="process" command IN ADS_FILE_EXTENSIONS ((command="*type *"
↪ command="* > *" ) OR (command="*makecab *" command="*.cab*" ) OR (command="*reg
↪ "*" command="* export *" ) OR (command="*diantz.exe*" command="*.cab*" ) OR
↪ (command="*regedit *" command="*/E *" ) OR (command="*print*" command IN ["/D:*",
↪ "*/d:*"] ) OR (command="*expand*" ) OR (command="*extrac32*" command="*.cab*" ) OR
↪ (command="*curl*" command IN ["*--output*", "*-o*"] ) OR (command="*certutil*"
↪ command="*-urlcache*" ) OR (command="*esentutl*" command="*/y*" command="*/d*")
↪ OR (command="*esentutl *" command="*/y *" command="*/d *" command="*/o *"))
↪ OR (label="create" label="file" file in ADS_FILE_EXTENSIONS)
```

2.632 LP_Alternate Data Stream Created using Findstr

- **Trigger Condition:** When findstr is used to create an alternate data stream. Findstr is generally used to search for strings in files or to filter command line output. Adversaries can exploit it to create an alternate data stream for defense evasion. For this alert to work, the ADS_FILE_EXTENSIONS list is required.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** NTFS File Attributes
- **ATT&CK ID:** T1564.004

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
[label="create" label="process" "process"="*\findstr.exe" command="*\findstr*" ((command=
↪ "*/V*" command="*/L*") OR (command="*/S*" command="*/I*"))] as s1 followed by [label=
↪ "Create" label="File" file in ADS_FILE_EXTENSIONS] as s2 on s1.process_id=s2.process_id [?]
↪ rename s1.process as "process", s1.log_ts as log_ts,s1.command as command,s1.host as host,
↪ s1.user as user, s1.parent_process as parent_process
```

2.633 LP_Suspicious Download Using Diantz

- **Trigger Condition:** When a remote file is downloaded using diantz.exe and stored by compressing it into a .cab file on a local machine. It performs a similar function as makecab.exe, which compresses a file into a smaller file with a .cab file extension. Adversaries can use diantz.exe for ingress tool transfer to evade the defenses and establish a c2 connection.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer
- **ATT&CK ID:** T1105
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" command="*\diantz.exe*" command="*\*" command="*.
↪ cab*"
```

2.634 LP_Ngrok RDP Tunnel Detected

- **Trigger Condition:** Execution of Ngrok utility for tunneling RDP connection. Threat actors often use Ngrok to expose internal services to the internet, like making RDP publicly accessible. 16777216 artifact gets logged when an incoming RDP connection is established via ngrok.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Protocol Tunneling
- **ATT&CK ID:** T1572

- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer ((event_source IN ["Microsoft-Windows-TerminalServices-
↪ LocalSessionManager", "Microsoft-Windows-TerminalServices-RemoteConnectionManager
↪"]) OR (channel=Security event_id=4779)) (source_address="::%16777216" OR eventxml.
↪ address="::%16777216") | rename eventxml.address as source_address
```

2.635 LP_Windows Defender Uninstall via PowerShell

- **Trigger Condition:** When PowerShell is used to uninstall Windows Defender. PowerShell is a Microsoft task automation and configuration management program consisting of a command-line shell with its scripting language. Microsoft Defender Antivirus is an anti-malware component of Microsoft Windows. Adversaries can use this technique to avoid the detection of their malware.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1562 - Impair Defenses
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\powershell.exe" command="*Uninstall-
↪ WindowsFeature*Name*Windows-Defender*
```

2.636 LP_Hijacked Binary Execution via Settings Synchronizer

- **Trigger Condition:** When SettingSyncHost is used to run hijacked binaries. SettingSyncHost is a Microsoft Windows host process that synchronizes system settings with other devices, including Internet Explorer, a mail application, OneDrive, Xbox and other application settings. Adversaries can exploit SettingSyncHost to run hijacked binaries and other specified files.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1574.008 - Path Interception by Search Order Hijacking
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

- **Query:**

```
label="process" label="create" - "process" IN ["C:\Windows\System32\*",
↪ "C:\Windows\SysWOW64\*"] parent_command IN ["*cmd.exe /c*", "*cmd /c*"] parent_
↪ command="*RoamDiag.cmd*" parent_command="*-outputpath*"
```

2.637 LP_Suspicious Execution of Dump64

- **Trigger Condition:** When suspicious use of dump64.exe is detected. dump64.exe is a memory dump tool bundled with Microsoft Visual Studio. Adversaries can leverage it to create a memory dump and parse it offline to retrieve credentials. Adversaries can bypass Microsoft Defender by renaming a tool to dump64.exe and placing it in a Visual Studio folder, for example, procdump.exe. It can trigger false positives if dump64.exe is executed from any folder other than excluded one, even for a legitimate purpose.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** T1003.001 - LSASS Memory
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\dump64.exe" (-("process"=
↪ "\Installer\Feedback\dump64.exe*") OR command IN ["*-ma *", "*accpeteula*"])
```

2.638 LP_Code Compilation via Visual Basic Command Line Compiler

- **Trigger Condition:** When a successful compilation of code using Visual Basic Command Line Compiler is detected. vbc.exe is Microsoft's Visual Basic compiler used to compile programs within the Visual Studio integrated development environment (IDE). Adversaries can leverage it to collect malicious code on the system to bypass defensive countermeasures. The legitimate use of this tool can trigger false positives, but it is barely used in enterprise environments, so the detection of service is suspicious.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1027.004 - Compile After Delivery

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" parent_process="*\vbc.exe" "process"="*\cvtres.exe"
```

2.639 LP_File Downloaded from Suspicious URL Using GfxDownloadWrapper

- **Trigger Condition:** When downloading files from suspicious (non-standard) URLs using GfxDownloadWrapper.exe is detected. Intel Graphics Executable Download Wrapper (GfxDownloadWrapper) is an application file that allows you to update your graphics card module. It downloads JSON files from <https://gameplayapi.intel.com>. Adversaries can leverage its functionality to download files from other non-standard URLs.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" "process"="*\GfxDownloadWrapper.exe" - command=
↳ "*gameplayapi.intel.com*" - parent_process="*\GfxDownloadWrapper.exe"
```

2.640 LP_Suspicious CLR Logs File Creation

- **Trigger Condition:** When .NET code is executed via applications, such as mshta, cscript, wscript, regsvr32 and wmic. .NET is a developer platform with tools and libraries for building applications, including web, mobile, desktop, games, IoT, cloud, and microservices. Common Language Runtime in a .NET environment runs code and provides services to make the development process more manageable. The binaries included in the query are Windows internal binary which adversaries can use to execute their malicious scripts.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** T1055 - Process Injection
- **Minimum Log Source Requirement:** Windows Sysmon

- **Query:**

```
label=File label=Create label=Overwrite path="*\AppData\Local\Microsoft\CLR*\UsageLogs\*
↪ " file IN ["mshta*", "cscript*", "wscript*", "regsvr32*", "wmic*"]
```

2.641 LP_CLR DLL Loaded via Scripting Application

- **Trigger Condition:** When Common Language Runtime (CLR) DLL is loaded via scripting applications. mshta.exe, wscript.exe and cscript.exe are Windows internal binary. Common Language Runtime works in the .NET environment, which runs the code and provides services that make the development process more manageable. Adversaries can use this technique to execute malicious scripts.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218.005 - Mshta
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=image label=load source_image IN ["*\wscript.exe", "cscript.exe", "mshta.exe"] ⓘ
↪ image IN ["*\clr.dll", "mscorlib.dll", "mscorlib.dll"]
```

2.642 LP_Obfuscation Script Usage via MSHTA to Execute Vbscript

- **Trigger Condition:** When execution of invoke-obfuscation PowerShell script with mshta to execute vbscript is detected. mshta.exe file is a software component of Windows Internet Explorer that runs HTML application(HTA) files. Invoke Obfuscation is a PowerShell command and script obfuscation framework. VBScript is an Active Scripting language developed by Microsoft modeled on Visual Basic. Adversaries can use this technique to bypass defensive mechanisms.
- **ATT&CK Category:** Defense Evasion, Execution
- **ATT&CK Tag:** T1027 - Obfuscated Files or Information, T1059.001 - PowerShell
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create command=* | process regex("(?P<new_command>(?!).*set).*&&
↪).*(mshta).*(vbscript:createobject).*(\\.run).*(\\window\\.close\\.)*",command) | filter new_
↪command=*
```

2.643 LP_Microsoft Defender Logging Disabled

- **Trigger Condition:** When Windows Defender Registry key is modified to disable Windows Defender's logging. Windows Defender is an anti-malware component of Microsoft Windows. Adversaries use this technique to disable logs generated from Windows Defender and avoid detection.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1562 - Impair Defenses
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Registry label=Value label=Set target_object=
↪"*\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\WINEVT\\Channels\\Microsoft-Windows-
↪Windows Defender\\Operational\\Enabled" detail="DWORD (0x00000000)"
```

2.644 LP_UAC Bypass via CMLUA or CMSTPLUA

- **Trigger Condition:** When user CMLUA OR CMSTPLUA DLL is loaded to perform user account control (UAC) bypass.
- **ATT&CK Category:** Privilege Escalation
- **ATT&CK Tag:** T1548.002 - Bypass User Account Control
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id="WindowsSysmon" label=Image label=Load image IN ["*\\cmlua.dll", "*\\cmstplua.dll",
↪"*\\cmluutil.dll"] - "process" IN ["*\\cmstp.exe", "*\\cmmgr32.exe"] - "process" IN [
↪"*\\windows\\*", "*\\program files\\*"]
```

2.645 LP_LSA Protected Process Light Disabled

- **Trigger Condition:** When modification of the registry value of Protection Process Light (PPL) to disable, it is detected. Protected Process can be accessed by executables that are digitally signed with a unique Windows Media, with administrator privilege. Protected Process Light is an extension of a protected process where a process can be assigned a different level of protection. Adversaries can use this technique to access the LSASS process and dump it to retrieve credentials.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1112 - Modify Registry
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Set label=Value target_object=
→ "*\\System\\CurrentControlSet\\Control\\Lsa\\RunAsPPL " detail="DWORD (0x00000000) "
```

2.646 LP_Suspicious Invocation of Microsoft Workflow Compiler

- **Trigger Condition:** When the use of Microsoft Workflow Compiler is detected. Microsoft Workflow Compiler is a utility included by default in the .NET framework, capable of compiling and executing arbitrary, unsigned C# or VB.net code. Adversaries can leverage it for the proxy execution of executables to evade detection. The use of MWC in an enterprise environment is highly unlikely. However, legitimate use can trigger false positives.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1127 - Trusted Developer Utilities Proxy Execution
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" ("process"="*\\Microsoft.Workflow.Compiler.exe" OR (file=
→ "Microsoft.Workflow.Compiler.exe" command="*.xml/*"))
```

2.647 LP_Process Dump via Sqldumper Detected

- **Trigger Condition:** When a process dump via Sqldumper.exe is detected. The Sqldumper.exe is a debugging utility, included with Microsoft SQL Server, which generates memory dumps of SQL Server and of related processes for debugging purposes. Adversaries can leverage its functionality to dump processes like LSASS. Legitimate MSSQL Server actions can trigger false positives.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** T1003 - OS Credential Dumping, T1003.001 - LSASS Memory
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\sqldumper.exe" command IN ["*0x0110*",
↪ "*0x01100:40*"]
```

2.648 LP_Suspicious Usage of SQLToolsPS Detected

- **Trigger Condition:** When the proxy execution of PowerShell code through the SQLToolsPS.exe is detected. SQLToolsPS.exe is a utility shipped along with Microsoft SQL Server Management Studio that loads SQL Server cmdlts. Adversaries can leverage its functionality to execute malicious powershell codes and bypass the detection methods. Direct execution of PowerShell codes via SQLToolsPS.exe are uncommon. However, the child process sqltoolsps.exe spawned by smss.exe is a legitimate action.
- **ATT&CK Category:** Execution, Defense Evasion
- **ATT&CK Tag:** T1059.001 - PowerShell, T1127 - Trusted Developer Utilities Proxy Execution
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" (("process"="*\sqltoolsps.exe" OR parent_process=
↪ "*\sqltoolsps.exe") OR (file="*\sqltoolsps.exe" -(parent_process="*\smss.exe")))
```

2.649 LP_Proxy Execution of Malicious Payload via Pubprn

- **Trigger Condition:** When proxy execution of malicious payloads via PubPrn.bs is detected. PubPrn.vbs is a signed Visual Basic script that publishes a printer to Active Directory Domain Services. Adversaries can abuse PubPrn to execute malicious payloads hosted on remote sites.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1216.001 - PubPrn
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" command="*\pubprn.vbs*" command="*script:*
```

2.650 LP_File Download via IMEWDBLD

- **Trigger Condition:** When a network connection is detected via the IMEWDBLD.exe binary. IMEWDBLD.EXE is a part of Microsoft Input Method Editor (IME). IME is a software component that enables a user to enter text in a language that can't easily be typed using a standard keyboard. Adversaries can use this technique to download remote system payload.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Connection label=Network label=Detect "process"="*\IMEWDBLD.exe" is_initiated=true
```

2.651 LP_Memory Dump via Adplus

- **Trigger Condition:** When LSASS process dump via adplus.exe is detected. Local Security Authority Server Service (LSASS) is a process in Microsoft Windows operating systems that is responsible for enforcing the security policy on the system and handles authentication, password change and tokens. ADPlus is a console-based Visual Basic script included with Microsoft Debugging Tools for Windows installation. Adversaries may attempt to access credentials stored in the process memory of the LSASS.

- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** T1003.001 - LSASS Memory
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\adplus.exe" command IN ["*-hang *", "*-pn *",
↳ "*-pmn *", "*-p *", "*-po *", "*-c *", "*-sc *"]
```

2.652 LP_Remote Thread Created via Ttdinject

- **Trigger Condition:** When a remote thread is created by ttdinject binary. Ttdinject is a binary that is a part of the Time Travel Debugging utility, which is used in Windows 10 v1809. Time Travel Debugging is a tool that captures a process trace as it executes and allows to replay it later. Adversaries can use this technique to proxy execute malicious payloads.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1127 - Trusted Developer Utilities Proxy Execution
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create ("process"="*\ttdinject.exe" OR file="TTDInject.exe")
```

2.653 LP_Proxy Download via OneDriveStandaloneUpdater

- **Trigger Condition:** When OneDriveStandaloneUpdater registry value is modified. OneDriveStandaloneUpdater.exe is a binary that belongs to the Standalone Updater process and comes with Microsoft OneDrive. Adversaries can use this technique for transferring tools or other files to the victim system from a URL that is set in the OneDriveStandaloneUpdater registry. Registry auditing must be enabled and permission must be allowed for auditing the OneDriveStandaloneUpdater registry.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows Sysmon

- **Query:**

```
label=registry label=value label=set target_object=
↳ "*"SOFTWARE\Microsoft\OneDrive\UpdateOfficeConfig\UpdateRingSettingURLFromOC*"
```

2.654 LP_Suspicious WMIC ActiveScriptEventConsumer Created

- **Trigger Condition:** When WMIC is executed to create an event consumer. ActiveScriptEventConsumer is a class that runs a predefined script in an arbitrary scripting language when an event is delivered to it. Adversaries may establish persistence and elevate privileges by executing malicious content triggered by a Windows Management Instrumentation (WMI) event subscription.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1546.003 - Windows Management Instrumentation Event Subscription
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create command="*ActiveScriptEventConsumer*" command="*?
↳ CREATE *"
```

2.655 LP_Remote Connection Established via Msbuild

- **Trigger Condition:** When a network connection is initiated via MSBuild while building an application is detected. Microsoft Build (MSBuild) Engine is a platform for building applications. Adversaries can use this technique to build their payload and establish a network connection to their controlled server.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** MSBuild
- **ATT&CK ID:** T1127.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=windowssysmon "process"="*\msbuild.exe" event_id=3 destination_port IN ["80",
↪ "443"]
```

2.656 LP_Executables Started in Suspicious Folder

- **Trigger Condition:** When the execution of binaries from a suspicious folder is detected. Paths mentioned in lists are not Windows default paths from where native and internal binaries are executed. Adversaries may attempt to masquerade their payload as legitimate binaries and execute from non-default paths to avoid detection. Legitimate binaries executed from those paths can trigger an alert, so include those binaries in the excluded process list.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1036 - Masquerading
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label="process" label=create "process" IN SUSPICIOUS_FOLDER_EXE_EXECUTION
-"process" IN ["*SpeechUXWiz.exe", "*SystemSettings.exe", "*TrustedInstaller.exe",
↪ "*PrintDialog.exe",
"*MpSigStub.exe", "*LMS.exe", "*mpam-*.exe"]
```

2.657 LP_Windows RDP Port Modified

- **Trigger Condition:** When remote desktop protocol (RDP) for Windows protocol is modified. RDP is a protocol that allows users to have GUI access to a remote desktop. Adversaries can modify the RDP port to evade the defense mechanism used to detect connections in the default RDP port.
- **ATT&CK Category:** Lateral Movement
- **ATT&CK Tag:** T1021.001 - Remote Desktop Protocol
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Registry label=Value label=Set target_object=
↪ "*\System\CurrentControlSet\Control\Terminal Server\WinStations\RDP-Tcp\PortNumber"
```

2.658 LP_Curl Silent Mode Execution Detected

- **Trigger Condition:** When curl is run in silent mode. Client URL (curl) is a command line tool that is used to transfer data to and from a server. Adversaries can use this technique to prevent showing file transfer progress and redirect output to a file.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** T1105 - Ingress Tool Transfer
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create command="*curl*" ((command="*-s*" command="*-o*") OR
↪ command="*-s*")
```

2.659 LP_High Volume of File Modification or Deletion in Short Span

- **Trigger Condition:** When 30 file modifications or deletions are detected within a single minute. A large number of file modifications and deletions is an indicator of ransomware. Based on requirements and the number of detected false positives, a user can modify the number of events needed or the time frame. To generate logs, enable the auditing policy of the relevant folders. When a user/software modifies a large number of files this can result in a false positive. To reduce the number of false positives events exclude the process in the query.
- **ATT&CK Category:** Impact
- **ATT&CK Tag:** T1565 - Data Manipulation
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
[30 label=File label=Object label=Storage access IN ["Delete*", "writedata*"] - "process" IN [
↪ "*\tiworker.exe", "*\poqexec.exe", "*\msiexec.exe"] having same host,domain,user, "process
↪ " within 1 minutes]
```

2.660 LP_Non-Existent User Login Attempt Detected

- **Trigger Condition:** When eight non-existent user login attempts on SSH service are detected within a minute. Secure Shell (SSH) is a protocol that provides a secure way to access a computer over a network. Adversaries can perform username brute force to find a valid username. Based on the requirement and false positive, the user can modify the number of invalid login attempts and time frame.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** T1110 - Brute Force
- **Minimum Log Source Requirement:** Unix
- **Query:**

```
[8 label=Invalid label=User "process"=sshd having same source_address within 1 minutes]
```

2.661 LP_Execution of Temporary Files Via Office Application

- **Trigger Condition:** When Office applications creates a child process that executes a file with .tmp extension. Adversaries uses this technique to avoid detection by using the legit application to run a payload that is masquerading as a temporary file.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1036 - Masquerading
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "parent_process" IN ["*\winword.exe", ".*\powerpnt.exe",  
↪ ".*\excel.exe"] "process"="*.tmp"
```

2.662 LP_Execution of Temporary Files Via Office Application

- **Trigger Condition:** When Office applications creates a child process that executes a file with .tmp extension. Adversaries use this technique to avoid detection by

using the legit application to run a payload that is masquerading as a temporary file.

- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1036 - Masquerading
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" "parent_process" IN ["*\winword.exe", ".*\powerpnt.exe",
↪ ".*\excel.exe"] "process"="*.tmp"
```

2.663 LP_Malicious Image Loaded Via Excel

- **Trigger Condition:** When an unsigned image is loaded via Excel. An XLL file is an add-in used by Microsoft Excel. It contains extra functions, templates, or other tools that enhance the capabilities of Excel. Examples of add-ins include custom chart generators and template managers. Adversaries can use this technique to load their malicious unsigned add-ins to execute their payload or download malware from a remote server.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1137 - Office Application Startup, T1137.001 - Office Template Macros
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=Image label=Load "process"=".*\excel.exe" file IN ["*.xlam ", ".*.xla", ".*.xll"] is_sign=false
```

2.664 LP_Malicious Chrome Extension Detected

- **Trigger Condition:** When malicious Chrome extension IDs are detected by Osquery. This analytic relies on chrome_extensions table and requires analysts to keep an up-to-date list of malicious chrome extension IDs.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1176 - Browser Extensions

- **Minimum Log Source Requirement:** -
- **Query:**

```
event_source=OSQuery event_type=chrome_extension* columns_identifier IN MALICIOUS_  
↳ CHROME_EXTENSIONS
```

2.665 LP_Chrome Extension Installed Outside of the Webstore

- **Trigger Condition:** When malicious chrome extensions are installed from outside the official Chrome webstore. Adversaries can manually install the browser extension via their batch, PowerShell or VBS scripts. Analysts need to make sure they place the correct event types in the query.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1176 - Browser Extensions
- **Minimum Log Source Requirement:** -
- **Query:**

```
event_source=OSQuery event_type="chrome_extension*" columns_from_webstore=false
```

2.666 LP_Chrome Extension Installed with DevTools Permission

- **Trigger Condition:** When OSQuery detects the chrome extension installed with devtools permission. Analyst must check for unusual extensions installed with this permission and also check if the extensions were installed from the webstore.
- **ATT&CK Category:** Persistence
- **ATT&CK Tag:** T1176 - Browser Extensions
- **Minimum Log Source Requirement:** -
- **Query:**

```
event_source=OSQuery event_type="chrome_extension*" columns_permission="*devtools*"
```

2.667 LP_Browser Credential Files Accessed

- **Trigger Condition:** When access to a browser (Chrome, Edge & Firefox) using stored credential is detected. When a user saves any credentials in the browser, those credentials are stored in files that are included in the query. Adversaries can access those files in an attempt to retrieve the stored credentials.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1202 - Indirect Command Execution
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=File label=Access ((path IN ["*\AppData\Local\Google\Chrome\User
Data\Default\Network\Cookies*", "*\Appdata\Local\Chrome\User Data\Default\Login Data*",
"\AppData\Local\Google\Chrome\User Data\Local State*"] object_name IN [
"\Appdata\Local\Microsoft\Windows\WebCache\WebCacheV01.dat", "*\cookies.sqlite"])
OR object_name IN ["*\Microsoft\Edge\User Data\Default\Web Data", "*Firefox*release\logins.
json", "*firefox*release\key3.db", "*firefox*release\key4.db"])
- "process" IN ["*\firefox.exe", "*\chrome.exe", "C:\Program Files\*", "C:\Program Files (x86)\*",
"C:\WINDOWS\system32\*", "*\MsMpEng.exe", "*\MpCopyAccelerator.exe", "*\thor64.exe",
"\thor.exe"] -parent_process IN ["C:\Windows\System32\msiexec.exe"] -("process"=system
parent_process=idle) "access"="ReadData"
```

2.668 LP_Windows Defender Antivirus Definitions Removal Detected

- **Trigger Condition:** Microsoft Defender Antivirus signature definitions removed from the system. Adversaries leverage this method to remove Antivirus definitions and ultimately avoid detection. False positives may occur if system administrators manually clear the current cache and trigger a signature definition update.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1562.001 - Disable or Modify Tools
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\MpCmdRun.exe" command="*RemoveDefinitions*
↪"
```

2.669 LP_Exchange ProxyShell Pattern Detected

- **Trigger Condition:** When a URL pattern associated with ProxyShell exploitation attempts (both successful and failure) against Exchange servers is detected. ProxyShell is an attack chain that exploits three known vulnerabilities in Microsoft Exchange: CVE-2021-34473, CVE-2021-34523, and CVE-2021-31207. Adversaries may exploits these vulnerabilities to perform remote code execution.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** T1190 - Exploit Public-Facing Application
- **Minimum Log Source Requirement:** Webserver
- **Query:**

```
norm_id=*((url="*/autodiscover.json*" url IN ["*/powershell*", "*/mapi/nsapi*", "*/EWS*", "X-
↪Rps-CAT*"]) OR url IN ["*/autodiscover.json?*", "*/autodiscover.json%3f*", "*/%3f@foo.com*
↪", "*/Email=autodiscover/autodiscover.json*", "*/json?@foo.com*"])
```

2.670 LP_Successful Exchange ProxyShell Attack

- **Trigger Condition:** When a URL pattern and status code associated with a successful ProxyShell exploitation attack against Exchange servers are detected. ProxyShell is an attack chain that exploits three known vulnerabilities in Microsoft Exchange: CVE-2021-34473, CVE-2021-34523, and CVE-2021-31207. Adversaries may exploit these vulnerabilities to perform remote code execution.
- **ATT&CK Category:** Initial Access
- **ATT&CK Tag:** T1190 - Exploit Public-Facing Application
- **Minimum Log Source Requirement:** Webserver
- **Query:**

```
norm_id=*((url="*/autodiscover.json*" url IN ["*/powershell*", "*/mapi/nsapi*", "*/EWS*", "X-
↪Rps-CAT*"]) status_code IN [200, 301])
```

2.671 LP_DLL Loaded Via AllocConsole and Rundll32

- **Trigger Condition:** When DLL loading through `allocconsole` function and `rundll32`. `AllocConsole` is a Windows internal function that allocates a new console for the calling process. `Rundll32.exe` is a Windows internal binary that loads and runs 32-bit dynamic-link libraries (DLLs). Adversaries can use this technique to execute their payload using `rundll32` to load a malicious DLL by invoking the `AllocConsole` function.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1218.011 - Rundll32
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process" = "*\rundll32.exe" command="*.dll*" command=
↳ "*allocconsole*"
```

2.672 LP_Active Directory Database Dump Attempt

- **Trigger Condition:** When an attempt to dump the `ntds.dit` file is detected. `NTDS.dit` file is a database that stores the Active Directory data (including users, groups, security descriptors and password hashes). Adversaries can use this technique to retrieve credentials and obtain other domain information.
- **ATT&CK Category:** Credential Access
- **ATT&CK Tag:** T1003.003 - NTDS
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create(("process" IN ["*\NTDSDump.exe", "*\NTDSDumpEx.exe"]) OR
(command= "*ntds.dit*" command= "*system.hiv*" ) OR (command= "*NTDSgrab.ps1*") ) OR
↳ (command= "*ac i ntds*"
command= "*create full*" ) OR (command= "*/c copy *" command= "*\windows\ntds\ntds.dit*" )
↳ OR
(command= "*activate instance ntds*" command= "*create full*" ) OR (command= "*powershell*"
↳ " command= "*ntds.dit*" ) OR
(command= "*ntds.dit*" "process" IN
["*\apache*", "*\tomcat*", "*\AppData\*", "*\Temp\*", "*\Public\*", "*\PerfLogs\*"] OR
↳ "parent_process" IN
["*\apache*", "*\tomcat*", "*\AppData\*", "*\Temp\*", "*\Public\*", "*\PerfLogs\*"] )
```

2.673 LP_Suspicious Child Process Creation via OneNote

- **Trigger Condition:** When the creation of suspicious child processes, execution of binaries from non-default paths and script file execution through OneNote are detected. Adversaries can use malicious OneNote files to social engineer users to execute it and drop their malicious payload or execute commands in the victim system.
- **ATT&CK Category:** Initial Access, Execution
- **ATT&CK Tag:** T1204.002 - Malicious File, T1566.001 - Spearphishing Attachment
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=1 parent_image="*\onenote.exe"
(file IN ["RUNDLL32.exe", "REGSVR32.exe", "bitsadmin.exe", "CertUtil.exe", "InstallUtil.exe",
↪ "schtasks.exe", "wmic.exe", "cscript.exe", "wscript.exe", "CMSTP.EXE", "Microsoft.Workflow.
↪ Compiler.exe", "RegAsm.exe", "RegSvcs.exe", "MSHTA.EXE", "Msxsl.exe", "IEExec.exe", "Cmd.
↪ Exe", "PowerShell.EXE", "HH.exe", "javaw.exe", "pcalua.exe", "curl.exe", "ScriptRunner.exe",
↪ "CertOC.exe", "WorkFolders.exe", "odbcconf.exe", "msiexec.exe", "msdt.exe"]) OR
(image="*\explorer.exe" command IN ["*.hta*", "*.vb*", "*.wsh*", "*.js*", "*.ps*", "*.scr*", "*.pif*",
↪ "*.bat", "*.cmd*"]) OR image IN ["*\AppData\*", "*\Users\Public\*", "*\ProgramData\*",
↪ "*\Windows\Tasks\*", "*\Windows\Temp\*", "*\Windows\System32\Tasks\*"])
```

2.674 LP_Usage of Web Request Command

- **Trigger Condition:** Usage of various web request commands with commandline tools and Windows PowerShell cmdlets (including aliases) via commandline.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows, Windows Sysmon, PowerShell
- **Query:**

```
(label="Create" label="Process" command IN ["*Invoke-WebRequest*", "*iwr*", "*wget*",
↪ "*curl*", "*Net.WebClient*", "*Start-BitsTransfer*", "*Resume-BitsTransfer*", "*[System.Net.
↪ WebRequest]::create*", "*Invoke-RestMethod*", "*WinHttp.WinHttpRequest*", "*new-
↪ object system.net.webclient).downloadstring*", "*new-object system.net.webclient).
↪ downloadfile*", "*new-object net.webclient).downloadstring*", "*new-object net.webclient).
↪ downloadfile*", "*Download*", "*Net.WebClient*"] -user IN EXCLUDE(C:\Users\*) OR (image=
↪ id=WinServer event_id= 4104 script_block IN ["*Invoke-WebRequest*", "*iwr*", "*wget*",
↪ "*curl*", "*Net.WebClient*", "*Start-BitsTransfer*", "*Resume-BitsTransfer*", "*[System.Net.
↪ WebRequest]::create*", "*Invoke-RestMethod*", "*WinHttp.WinHttpRequest*", "*new-object
↪ system.net.webclient).downloadstring*", "*new-object system.net.webclient).downloadfile*",
↪ "*new-object net.webclient).downloadstring*", "*new-object net.webclient).downloadfile*",
↪ "*Download*", "*Net.WebClient*"])
```

(continued from previous page)

2.675 LP_Reconnaissance Activity with Nltest

- **Trigger Condition:** When possible reconnaissance activity via nltest binary is detected. Nltest is a Windows command-line utility that comes with a Windows Server, which is used to list domain controllers and enumerate domain trusts. The binary is available if you have installed the AD DS or the AD LDS server role. It is also available if you install the Active Directory Domain Services Tools that are part of the Remote Server Administration Tools (RSAT). Adversaries can use this technique to discover domain controllers, users and query the domain trust relationship.
- **ATT&CK Category:** Discovery
- **ATT&CK Tag:** T1016 - System Network Configuration Discovery, T1482 - Domain Trust Discovery
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\nltest.exe" file="nltestrk.exe" ((command = "*/  
↪server*" command="*/query*") OR command IN ["*/dclist:*", "*/domain_trusts*", "*/trusted_  
↪domains*", "*/user*", "*/parentdomain*"])
```

2.676 LP_Regsvr32 Network Activity Detected

- **Trigger Condition:** When network connections and Application Layer Protocol, DNS queries initiated via regsvr32 binary are detected. Regsvr32 is a command-line utility to register and unregister the Windows Registry's OLE controls, such as DLLs and ActiveX controls. Adversaries utilized regsvr32 to run their malicious DLL, which downloads their other stager payload.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** Regsvr32
- **ATT&CK ID:** T1218.010
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon "process"="*\regsvr32.exe" event_id IN ["3", "22"]
```

2.677 LP_Privilege Escalation via Kerberos KrbRelayUp

- **Trigger Condition:** KrbRelayUp performs a universal no-fix local privilege escalation in Windows domain environments where LDAP signing is not enforced. KrbRelayUp is a wrapper that can streamline the use of some features in Rubeus, KrbRelay, SCMUACBypass, PowerMad/SharpMad, Whisker and ADCSPwn tools in attacks.
- **ATT&CK Category:** Credential Access, Lateral Movement
- **ATT&CK Tag:** Pass the Ticket, Kerberoasting
- **ATT&CK ID:** T1550.003, T1558.003
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create
(parent_image="KrbRelayUp.exe" OR image="KrbRelayUp.exe" OR
(command=" relay " AND command=" -Domain " AND command=" -ComputerName ") OR
(command=" krbscm " AND command=" -sc ") OR
(command=" spawn " AND command=" -d " AND command=" -cn " AND command=" -cp *"))
```

2.678 LP_Suspicious Execution of LNK File

- **Trigger Condition:** When the execution of suspicious LNK files that either spawns Powershell or command prompt and has high entropy in the command field is detected. A LNK file is a Windows Shortcut that is a pointer to open a file, folder or application. Adversaries can utilize LNK files to embed their malicious scripts and commands and lure victims into executing the payload to gain initial access and evade defense. For this alert to work, an entropy plugin is required. Analysts can set the entropy value depending on the environment to filter out false positives. In our environment, legitimate use entropy was below five, so we used an entropy value greater than five to filter out false positives. The baseline time for using the process entropy command to detect such events is 90 days.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** T1204.002 - Malicious File

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create parent_process="*\explorer.exe" "process" IN ["*\cmd.exe",
↪ " *\powershell.exe"]
| process entropy(command) as command_entropy
| search command_entropy > 5
```

2.679 LP_Insecure Policy Set via Set-ExecutionPolicy

- **Trigger Condition:** Set-ExecutionPolicy command utilized to set insecure policies such as Unrestricted, bypass and RemoteSigned is detected. Adversaries can utilize this technique to change the execution policy in order to execute their choice of malicious powershell scripts.
- **ATT&CK Category:** Execution
- **ATT&CK Tag:** PowerShell
- **ATT&CK ID:** T1059.001
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WinServer event_id=4104 script_block="*Set-ExecutionPolicy*" script_block IN [
↪ "*Unrestricted*", "*bypass*", "*RemoteSigned*"] -script_block IN [
↪ "*\AppData\Roaming\Code\*"]
```

2.680 LP_Network Connection to Suspicious Server

- **Trigger Condition:** Communication between hosts and domains mentioned in the query's list. The query will search for logs generated from the Windows system or proxies and firewalls. The sites mentioned in the query are either file-storing or hosting sites. Adversaries have utilized these sites in many campaigns to upload and download data.
- **ATT&CK Category:** Command and Control
- **ATT&CK Tag:** Ingress Tool Transfer
- **ATT&CK ID:** T1105

- **Minimum Log Source Requirement:** Windows Sysmon, Firewall, Proxy Server, WAF
- **Query:**

```
url IN ["*dl.dropboxusercontent.com*", "*.pastebin.com*", "*cdn.discordapp.com/attachments*",
↳, "*mediafire.com*", "*userstorage.mega.co.nz*", "*mega.nz*", "*ddns.net*", "*.paste.ee*",
↳, "*hastebin.com/raw/*", "*.ghostbin.co/*", "*ufile.io*", "*anonfiles.com*", "send.exploit.in*",
↳, "*transfer.sh*", "*privatlab.net*", "*privatlab.com*", "*sendspace.com*", "*pastetext.net*",
↳, "*pastebin.pl*", "*paste.ee*", "*api.telegram.org*"] OR domain IN ["*dropboxusercontent.*",
↳, "*pastebin.com*", "*cdn.discordapp.com*", "*mediafire.com*", "*userstorage.mega.co.*",
↳, "*mega.nz*", "*ddns.net*", "*.paste.ee", "*.hastebin.com", "*ghostbin.co", "*ufile.io",
↳, "*anonfiles.com", "send.exploit.in", "transfer.sh", "privatlab.net", "*privatlab.com",
↳, "*sendspace.com", "*pastetext.net", "*pastebin.pl", "*paste.e*", "*api.telegram.org"]
```

NON-MITRE ATT&CK ANALYTICS

The NON-MITRE ATT&CK alerts available in Alert Rules are:

3.1 LP_Windows Login Attempt on Disabled Account

- **Trigger condition:** A user attempts to log in using a disabled account.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer* label=User label=Login label=Fail sub_status_code= "0xC0000072" -  
↪ target_user=*-user = ?-user IN EXCLUDED_USERS | rename user as target_user,?  
↪ domain as target_domain,reason as failure_reason
```

3.2 LP_VMware Link Up

- **Trigger condition:** VMware connection is up.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** VMware
- **Query:**

```
norm_id=VmwareESX label = Link label=Up | chart count() by log_ts, host, switch, port_
↪group, network_adapter
```

3.3 LP_VMware Link Down

- **Trigger condition:** VMware's connection is down.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** VMware
- **Query:**

```
norm_id=VmwareESX label = Link label=Down | chart count() by log_ts, host, switch, port_
↪group, network_adapter
```

3.4 LP_LogPoint License Expiry Status

- **Trigger condition:** Logpoint license is about to expire.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Logpoint
- **Query:**

```
norm_id=LogPoint label=Audit object='License checker' days_remaining=*
```

3.5 LP_Mitre Initial Access Using Spearphishing link Detected

- **Trigger condition:** Malicious URL is detected.
- **ATT&CK Category:** N/A

- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Mimecast
- **Query:**

```
norm_id=Mimecast label=Detect label=Malicious label=URL | process eval("attack_class=
↪ 'Initial Access'") | process eval("technique='Spearphishing Link'")
```

3.6 LP_Mitre Command and Control Using Standard Application Layer Protocol Detected

- **Trigger condition:** Command and control activity using standard application layer protocol is detected.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Proxy server
- **Query:**

```
norm_id=*proxy source_address=* destination_address=* destination_port IN[?]
↪ STANDARD_APPLICATION_PORTS | process ti(destination_address) | rename et_
↪ category as ti_category | process eval("attack_class='Command and Control'") | process[?]
↪ eval("technique='Standard Application Layer Protocol'") | search ti_category=
↪ "*Command and Control*"
```

3.7 LP_Endpoint Protect Threat Content Detected

- **Trigger condition:** Threat content is detected.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Endpoint Protector

- **Query:**

```
norm_id=EndPointProtector label=Threat label=Content (label=Detect OR label=Block)  
↪ file=* user=*
```

3.8 LP_Endpoint Protect Device Disconnect

- **Trigger condition:** A USB device is disconnected.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Endpoint Protector
- **Query:**

```
norm_id = EndPointProtector label=disconnect user=* device_type="USB Storage Device"
```

3.9 LP_Endpoint Protect File Delete

- **Trigger condition:** A file is deleted.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Endpoint Protector
- **Query:**

```
norm_id=EndPointProtector label=File label=Delete file=* user=*
```

3.10 LP_Endpoint Protect File Copied To USB Device

- **Trigger condition:** A file is copied to external USB drive.
- **ATT&CK Category:** N/A

- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Endpoint Protector
- **Query:**

```
norm_id=EndPointProtector label=File label=Copy device_type="USB Storage Device"
↪ file=* user=*
```

3.11 LP_System Owner or User Discovery Process Detected

- **Trigger condition:** An attack *Discovery* is performed using the attack technique *System Owner or User Discovery*.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer label="Process" label=Create (commandline="*whoami*" OR
↪ commandline="*quser*" OR commandline="*wmic.exe*useraccount get*" OR
↪ command="*whoami*" OR command="*quser*" OR command="*wmic.
↪ exe*useraccount get*") -user IN EXCLUDED_USERS | rename commandline as command
```

3.12 LP_System Services Discovery Detected

- **Trigger condition:** An attack *Discovery* is performed using the attack technique *System Service Discovery*.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Windows

- **Query:**

```
norm_id=WinServer label="Process" label=Create (commandline="*net.exe*start*" OR
↪ commandline="*tasklist.exe*" OR command="*net.exe*start*" OR command="*tasklist.
↪ exe*" ) -user IN EXCLUDED_USERS | rename commandline as command
```

3.13 LP_SolarisLDAP Password Spraying Attack Detected

- **Trigger condition:** Password spraying attack is detected.
- **ATT&CK Category:** N/A
- **ATT&CK Tag:** N/A
- **ATT&CK ID:** N/A
- **Minimum Log Source Requirement:** Solaris LDAP
- **Query:**

```
norm_id=SolarisLDAP label=User (label=Login OR label=Authentication) label=Fail | chart
↪ distinct_count(user) as UserCount, distinct_list(user) as Users | search UserCount > 5
```

3.14 LP_Microsoft Defender AMSI Trigger

- **Trigger Condition:** Logpoint detects Microsoft Defender with AMSI as the detection source. The Windows Antimalware Scan Interface (AMSI) is a versatile interface standard that allows your applications and services to integrate with any antimalware product on a machine.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id=1116 source_name=AMSI event_source="Microsoft-
↪ Windows-Windows Defender"
```

3.15 LP_Petitpotam - Anonymous RPC and File Share

- **Trigger Condition:** Events related to Petitpotam are logged.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
[event_id=4624 package="NTLM*" (user="ANONYMOUS LOGON" or -workstation=*)]
↪ as stream1 join [event_id=5145 share_name=IPC$ access="*ReadData (or ListDirectory)
↪ WriteData (or AddFile)*" relative_target IN ["lsarpc", "efsrpc", "lsass", "samr",
↪ "netlogon"]] as stream2 on stream1.source_address = stream2.source_address and
↪ stream1.host = stream2.host | rename stream1.user as user, stream1.host as host,
↪ stream1.domain as domain, stream2.source_address as source_address, stream2.share_
↪ name as share_name, stream2.access as access, stream2.log_ts as log_ts
```

3.16 LP_RDP Sensitive Settings Changed

- **Trigger Condition:** Changes to RDP terminal service sensitive settings are detected.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object IN [
↪ "*\services\TermService\Parameters\ServiceDll*", "*\Control\Terminal
↪ Server\SingleSessionPerUser*", "*\Control\Terminal Server\DenyTSConnections*"] -
↪ user IN EXCLUDED_USERS
```

3.17 LP_Secure Deletion with SDelete

- **Trigger Condition:** Renamed a file while deleting it with the SDelete tool. Adversaries use various tools to clean traces left after their intrusion activity.
- **ATT&CK Category:** -

- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id=WinServer event_id IN ["4656", "4663", "4658"] object_name IN ["*.AAA", "*.ZZZ",
↪ "] -user IN EXCLUDED_USERS
```

3.18 LP_Suspicious Keyboard Layout Load Detected

- **Trigger Condition:** The keyboard preload installation with a suspicious keyboard layout, for example, Chinese, Iranian, or Vietnamese layout, loads in user sessions on systems that is maintained by US staff only.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=13 target_object IN ["*\Keyboard Layout\Preload\*",
↪ "\Keyboard Layout\Substitutes\*"] detail IN ["00000804", "00000c04", "00000404",
↪ "00001004", "00001404", "00000429", "00050429", "0000042a", "00000401", "00010401",
↪ "00020401"] -user IN EXCLUDED_USERS
```

3.19 LP_Remote Code Execution using WMI Win32_Process Class over WinRM

- **Trigger Condition:** When an attempt to execute code or create a service on a remote host via winrm.vbs is detected. WinRM is a windows native script used to manage Windows RM settings. The functionality of the WinRM command is provided through a Visual Basic Script, winrm.vbs. This script can be abused to create a process leading to remote code execution and lateral movement. False positives are uncommon, but legitimate use for administrative purposes such as remote PowerShell execution can trigger this alert.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows

- **Query:**

```
label=Create label="Process" command="*winrm*" command="*invoke Create wmicimv2/
↳ Win32_*" command="*-r:http*"
```

3.20 LP_Remote Code Execution using WMI Win32_Service Class over WinRM

- **Trigger Condition:** Application Whitelisting Bypass and Arbitrary Unsigned Code Execution Technique is attempted using winrm.vbs. It detects the execution of attacker-controlled WsmPty.xml or WsmTxt.xml via winrm.vbs and copied cscript.exe (can be renamed). winrm.vbs (a Windows-signed script) can consume and execute attacker-controlled XSL, which is not subject to enlightened script host restrictions, resulting in the execution of arbitrary, unsigned code execution.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Create label="Process" command="*winrm*" command IN ['*format:pretty*', '*format:
↳ "pretty"*', '*format:"text"*', '*format:text*'] -(image IN ["C:\Windows\System32\*",
↳ "C:\Windows\SysWOW64\*"])
```

3.21 LP_Suspicious Microsoft SQL Server PowerShell Module Use Detected

- **Trigger Condition:** The execution of a PowerShell code by the sqlps.exe utility, which is included in the standard set of utilities supplied with the MSSQL Server is detected. Script blocks are not logged in this case, so this utility helps to bypass protection mechanisms based on the analysis of these logs. As this attack requires sqlps.exe bundled with MSSQL installation, any device without it is not vulnerable. Also, child process sqlps.exe spawned by sqlagent.exe is a legitimate action. Direct PS command execution through SQLPS.exe is rare, but if it occurs, it results in a false positive.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Create label="Process" ("process"="*\sqlps.exe" OR parent_process="*\sqlps.exe" OR
↪file="*\sqlps.exe" ) -(parent_process="*\sqlagent.exe")
```

3.22 LP_Shadow Copy Deletion Using OS Utilities Detected

- **Trigger Condition:** When shadow copies are deleted using operating systems utilities. Shadow copy is a Microsoft technology that can create backup copies or snapshots of computer files or volumes. Windows internal binaries are PowerShell, wmic, vssadmin, diskshadow, wbadmin, and vssadmin. Adversaries can utilize these binaries to delete shadow copies from the system so that the data recovery and reverting the system to a saved state is impossible after dropping malware.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label="Create" ("process" IN ["*\powershell.exe", ".*\wmic.exe", ".*\vssadmin.
↪exe", ".*\diskshadow.exe"] command=".* shadow*" command=".*delete*") OR ("process"=
↪".*\wbadmin.exe" command=".*delete*" command=".*catalog*" command=".*quiet*") OR (
↪"process"=".*\vssadmin.exe" command=".*resize*" command=".*shadowstorage*"
↪command=".*unbounded*")
```

3.23 LP_Child Process Spawned via Diskshadow Detected

- **Trigger Condition:** When child processes are created using the diskshadow binary. DiskShadow.exe is a Windows internal binary that exposes the functionality offered by the Volume Shadow Copy Service. Volume shadow copy service is a Windows framework that backs up a volume by creating a copy of it. Adversaries can use diskshadow binary's interactive mode and execute other binaries using the exec command to bypass defensive countermeasures.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -

- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "parent_process"="*\diskshadow.exe" -command="*conhost.  
↪exe"
```

3.24 LP_Code Execution Via Diskshadow Detected

- **Trigger Condition:** When diskshadow binary is used to execute code from a file. DiskShadow.exe is Windows internal binary that exposes the functionality offered by the Volume Shadow Copy Service. Volume shadow copy service is a framework in Windows that provides the function to backup a volume by creating a copy of it. Adversaries can use diskshadow with -s or /s tag to execute a command from a file and bypass detection.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\diskshadow.exe" command IN ["*/s *", "*-s *"]
```

3.25 LP_Process Pattern Match For CVE-2021-40444 Exploitation

- **Trigger Condition:** The process pattern for CVE-2021-40444 is detected. CVE-2021-40444 is a remote code execution vulnerability in MSHTML, which is Microsoft's proprietary browser engine for Internet Explorer. Control.exe is a Windows internal binary to access the control panel. Adversaries can rename their malware or payload to control.exe and execute it to escape detection.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "process"="*\control.exe" parent_process IN ["*\winword.exe",
↪ " *\excel.exe", " *\powerpnt.exe"] -command="*\control.exe input.dll"
```

3.26 LP_Suspicious Extexport Execution Detected

- **Trigger Condition:** When a service is created by loading a DLL using the ExtExport service in IE. ExtExport is a module that serves to import/export data from other programs, for example, favorites or bookmarks from other browsers. Attackers can use Extexport.exe to load any DLL using the built-in tool ExtExport.exe which can be found inside the Internet Explorer directory.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label=Create label="Process" command IN ["*ExtExport*", "extexport"]
```

3.27 LP_Proxy Execution via Workfolders

- **Trigger Condition:** When Logpoint detects the use of workfolders binary to execute other process. Workfolders is a Windows internal binary that provides a consistent way for users to access their work files from their PCs and devices. Adversaries can use this technique to evade defensive countermeasures or to hide as a persistence mechanism.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Process" label=Create "parent_process"="*\workfolders.exe" "process"="*\control.exe
↪ " "process"="C:\Windows\System32\control.exe"
```

3.28 LP_Proxy Execution via Windows Update Client

- **Trigger Condition:** When wuauctl.exe is used to proxy execute codes. Wuauctl.exe (Windows Update Auto Update Client) is a Microsoft Windows native AutoUpdate Client used to check for available updates from Microsoft Update. Adversaries may abuse wuauctl.exe to camouflage and execute malicious codes.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" ("process"="*\wuauctl.exe" OR file="wuauctl.exe")
↪(command="*UpdateDeploymentProvider*" command="*.dll*" command=
↪"*RunHandlerComServer*")
- (command IN ["* /UpdateDeploymentProvider UpdateDeploymentProvider.dll *", "* wuaueng.
↪dll *"])
```

3.29 LP_Suspicious DLL Execution Using Windows Address Book

- **Trigger Condition:** When a suspicious DLL is executed using wab.exe. Windows Address Book stores addresses, contact details, and e-mail addresses by programs like Outlook. When wab.exe executes, it tries to load DLL pointed by the registry key. But adversaries leverage this functionality to load their custom malicious DLL from a path other than the default by modifying the path pointed by the registry key.
- **ATT&CK Category:** Defense Evasion
- **ATT&CK Tag:** T1564.004 - NTFS File Attributes
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="registry" label="set" target_object="*\Software\Microsoft\WAB\DLLPath*" - detail="
↪%CommonProgramFiles%\System\wab32.dll"
```

3.30 LP_Suspicious Use of Dotnet Detected

- **Trigger Condition:** When the execution of either suspicious DLL or unsigned code using dotnet.exe is detected. dotnet.exe is a command line tool for managing .NET source codes and binaries. Adversaries can use it to execute DLL or some unsigned code and can bypass default AppLocker rules. dotnet.exe might trigger false positives if used for penetrating testing or system administration.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="create" label="process" command IN ["*.dll", "*.csproj"] "process"="*\dotnet.exe"
```

3.31 LP_Execution of Arbitrary Executable Using Storddiag

- **Trigger Condition:** When a renamed arbitrary executable is executed using storddiag.exe. storddiag.exe collects storage and file system diagnostic logs and outputs to a folder. Generally, storddiag.exe performs schtasks.exe, systeminfo.exe and fltmc.exe after it is executed. Adversaries can abuse its functionality by copying it into a random folder, renaming the malicious executables as schtasks.exe, systeminfo.exe and fltmc.exe, and running them. It might trigger false positives for legitimate use of storddiag.exe.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="Create" label="Process" parent_process="*\storddiag.exe" "process" IN ["*\schtasks.exe",
↪ "\systeminfo.exe", "\fltmc.exe"] - parent_process IN ["C:\windows\system32\*",
↪ "C:\windows\syswow64\*"]
```

3.32 LP_Process Creation via Time Travel Tracer

- **Trigger Condition:** When a new child process is spawned via tttracer.exe. Microsoft Time Travel Tracing Tool (Tttracer) is a diagnostic tool to collect time travel traces of given processes. Later, traces are analyzed by Microsoft Support for troubleshooting purposes. Adversaries can use this binary to launch their malicious binary and create a dump of a process.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "parent_process"="*\tttracer.exe"
```

3.33 LP_Time Travel Debugging Utility DLL Loaded

- **Trigger Condition:** When loading of time travel debugging utility DLLs are detected. Ttdrecord.dll, ttdwriter.dll and ttdloader.dll are part of a time travel debugging utility. Time Travel Debugging is a tool that captures a trace of a process as it executes and replays it later, forward and backward. DLL adversaries can run other binaries or dump a process by loading.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
label=image label=load image IN ["*\ttdrecord.dll", "*\ttdwriter.dll", "*\ttdloader.dll"]
```

3.34 LP_File Execution via Msdeploy

- **Trigger Condition:** When MSDeploy is used to execute files. Microsoft Deploy (MSDeploy) is a binary that allows users to deploy Web Applications. Adversaries can use this technique to bypass application whitelisting.
- **ATT&CK Category:** -

- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\msdeploy.exe" command="*verb:sync*"
↪ command="*-source:RunCommand*" command="*-dest:runCommand"
```

3.35 LP_CVE-2022-40684 Exploitation Detected

- **Trigger Condition:** When an exploitation attempt of CVE-2022-40684 is detected. CVE-2022-40684 is an authentication bypass using an alternate path or channel vulnerability [CWE-288] in FortiOS, FortiProxy and FortiSwitchManager that may allow an unauthenticated attacker to perform operations on the administrative interface via specially crafted HTTP or HTTPS requests. Adversaries can use this technique to gain remote access to a system. The affected versions are: FortiOS v7.2.0-7.2.1, FortiOS v7.0.0-7.0.6, FortiProxy v7.2.0, FortiProxy v7.0.0-7.0.6, FortiSwitchManager v7.2.0 and FortiSwitchManager v7.0.0.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Firewall, Proxy Server, Web Server
- **Query:**

```
(url="*/api/v2/cmd/db/system/admin/*" OR resource="*/api/v2/cmd/db/system/admin/*") user_
↪ agent IN ["report runner", "Node.js"]
```

3.36 LP_Possible Proxy Execution of Malicious Code

- **Trigger Condition:** When the possible use of TE.exe for proxy execution of malicious scripts is detected. TE.exe is a testing tool included with Microsoft Test Authoring and Execution Framework (TAEF). TAEF allows users to run automation by executing test files written in different languages (C, C#, Microsoft COM Scripting interfaces). Adversaries can leverage its functionality to execute malicious codes (such as WSC files with VBScript or DLL) directly by running te.exe. It is not unusual to use te.exe directly to execute legal TAEF tests, so legitimate use can trigger false positives.
- **ATT&CK Category:** -

- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="create" "process"="*\te.exe" OR parent_process="*\te.exe" OR file=
↪ "\te.exe"
```

3.37 LP_Suspicious Usage of BitLocker Management Script

- **Trigger Condition:** When proxy execution of malicious payloads via Manage-bde.wsf is detected. Manage-bde.wsf is a BitLocker management script file that is generally used to turn BitLocker, specify unlock mechanisms, update recovery methods and unlock BitLocker-protected data drives. Adversaries can use it for the proxy execution of malicious payloads.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows, Windows Sysmon
- **Query:**

```
label="process" label="create" command="*cscript*" command="*manage-bde.wsf"
```

3.38 LP_Proxy Execution of Payloads via Microsoft Signed Script

- **Trigger Condition:** When proxy execution of PowerShell code via Microsoft signed script CL_Mutexverifiers.ps1 is detected. Adversaries can execute payloads via runAfterCancelProcess in CL_Mutexverifiers.ps1 module. Script block logging must have been enabled for the alert to work.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
norm_id="WinServer" event_id=4104 script_block IN ["*\CL_Mutexverifiers.ps1*",
↪ "*runAfterCancelProcess *"]
```

3.39 LP_Execution of Windows Defender Offline Shell from Suspicious Folder

- **Trigger Condition:** When OfflineScannerShell.exe is executed from a folder other than the default. Microsoft Defender Offline is an antimalware scanning tool that lets you boot and run a scan from a trusted environment. Adversaries can use OfflineScannerShell.exe to execute the mpclient.dll library in the current working directory and execute arbitrary codes.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows
- **Query:**

```
label="create" label="process" ("process"="*\OfflineScannerShell.exe" -((path="C:\Program
↪ Files\Windows Defender\Offline\") OR (-path=*))
```

3.40 LP_DLL Loaded Via AccCheckConsole

- **Trigger Condition:** When DLL loading through AccCheckConsole binary is detected. AccCheckConsole is a command-line tool for verifying the accessibility implementation of your application's UI. Adversaries can use this technique to load their malicious DLL.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\AccCheckConsole.exe" command="*-window*.dll*"
↪ "
```

3.41 LP_Proxy Execution via Appvlp

- **Trigger Condition:** When proxy execution of binaries via appvlp.exe is detected. Appvlp, also known as Application Virtualization Utility, is included with Microsoft Office 2016, which makes applications available to end-user computers without having to install applications directly on those computers. Adversaries can use this technique to bypass process or signature-based defenses by proxying the execution of malicious content with signed or otherwise trusted binaries.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\appvlp.exe" command IN ["*cmd.exe",
↪ "*powershell.exe*"] command IN ["*.sh*", "*.exe*", "*.dll*", "*.bin*", "*.bat*", "*.cmd*", "*.js*",
↪ "*.msh*", "*.reg*", "*.scr*", "*.ps*", "*.vb*", "*.jar*", "*.pl*", "*.inf*"]
```

3.42 LP_Proxy DLL Execution via UtilityFunctions

- **Trigger Condition:** When the use of UtilityFunctions script to execute a managed DLL is detected. UtilityFunctions is one of several powershell scripts from Microsoft for diagnostic and maintenance work. Adversaries can use this technique to proxy execute malicious files.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create command IN ["*UtilityFunctions.ps1*", "*RegSnapin*"]
```

3.43 LP_Suspicious Usage of Squirrel Binary

- **Trigger Condition:** When squirrel.exe is run via using arguments download, update and updateRollback arguments. Squirrel.exe is a binary to update the existing

installed NuGet or squirrel package. NuGet is a package manager designed to enable developers to share reusable code. Adversaries can use this technique to download and execute malicious NuGet package.

- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label="create" "process"="*\Squirrel.exe" command IN ["*download*",
↪ "*update*"]
```

3.44 LP_Suspicious File Share Permission

- **Trigger Condition:** When the execution of binaries from a suspicious folder is detected. Paths mentioned in the lists are not Windows default paths from where native and internal binaries are executed. Adversaries may attempt to masquerade their payload as legitimate binaries and execute from non-default paths to avoid detection. Legitimate binaries executed from those paths can trigger an alert, so include those binaries in the excluded process list.
- **ATT&CK Category:** -
- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon, Windows
- **Query:**

```
label="process" label=create "process"="*\net.exe" command="* share *grant:*FULL*"
```

3.45 LP_Legitimate Application Dropping Script File

- **Trigger Condition:** When the creation of a new script file by those applications which should not create one such as office applications, Wordpad. Script files contain a set of instructions or commands and are executed by a script interpreter or runtime environment. Adversaries can use this technique to drop their payload in the system and execute it.
- **ATT&CK Category:** -

- **ATT&CK Tag:** -
- **Minimum Log Source Requirement:** Windows Sysmon
- **Query:**

```
norm_id=WindowsSysmon event_id=11 file IN [ "*.ps1", "*.bat", "*.vbs", "*.scf", "*.wsf", "*.wsh" ]  
↪ "process" IN [ "*\\onenote.exe", "*\\winword.exe", "*\\excel.exe", "*\\powerpnt.exe",  
↪ "*\\msaccess.exe", "*\\mspub.exe", "*\\eqnedt32.exe", "*\\visio.exe", "*\\wordpad.exe",  
↪ "*\\wordview.exe", "*\\certutil.exe", "*\\certoc.exe", "*\\CertReq.exe", "*\\Desktopimgdownldr.exe",  
↪ "*\\esentutl.exe", "*\\finger.exe", "*\\AcroRd32.exe", "*\\RdrCEF.exe", "*\\mshta.exe", "*\\hh.exe",  
↪ "]"
```

ALERT RULES ANALYTICS

4.1 Alert Rules Dashboard

4.1.1 LP_Mitre Attack Analytics Overview

This dashboard consists of the following widgets:

Widget Name	Description
Triggered Attack Tactics	The count of different attack tactics triggered by attackers in your system based on the MITRE ATT&CK framework, categorized and summed by various tactics such as Initial Access, Execution, Persistence, Privilege Escalation, Defense Evasion, Credential Access, Discovery, Lateral Movement, Collection, Command and Control, Exfiltration and Impact. It helps administrators enhance their security posture, prioritize incident response, allocate resources effectively, and improve overall threat detection and mitigation strategies.
Triggered Attack Tactics - Timetrend	An hourly trend of various attack tactics triggered within your system, categorized according to the MITRE ATT&CK framework. It helps administrators maintain a robust and responsive security posture, ensuring timely detection and mitigation of potential threats.
Mitre Att&ck Matrix	An ATT&CK chart, a heatmap describing the attacks carried out in your system using attack tactics, techniques and procedures defined by MITRE. It shows the count of each attack ID within its respective attack category, helping administrators enhance their security posture, prioritize defences, and improve incident response and threat analysis.

Continued on next page

Table 1 – continued from previous page

Widget Name	Description
Top Recurring Attacks	The top ten recurring attacks within your system, categorized by attack type and frequency, allowing administrators to quickly identify the most common and persistent threats. For example, Console History Discover Detected is an attack, Collection is its attack category and the attack occurred three times.
Top Users by Attack Tactics	The top ten users based on the number of distinct attack tactics they were associated with, providing insights into which users are most frequently targeted or involved in diverse attack activities.
Top Hosts in Attack	The top ten hosts based on the number of distinct attack tactics they were associated with, providing insights into which hosts are most frequently targeted or involved in diverse attack activities.

4.1.2 Adding the Alert Rules Dashboard

1. Go to *Settings >> Knowledge Base* from the navigation bar and click **Dashboards**.
2. Select **VENDOR DASHBOARD** from the drop-down.
3. Click **Add** from **Actions** of *LP_Mitre Attack Analytics Overview*.
4. Click **Choose Repos**.

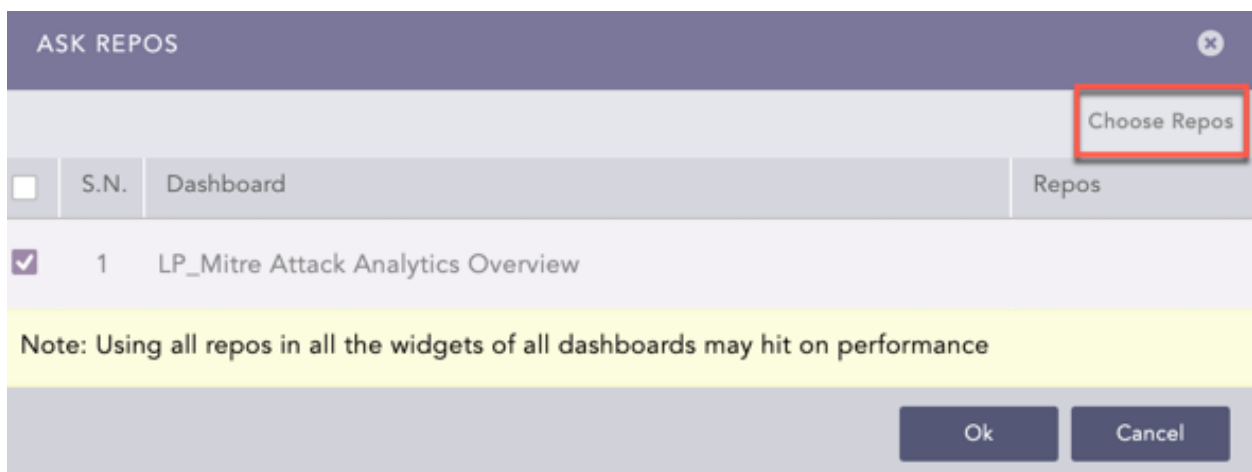


Fig. 1: Selecting Repos

5. Select the repo and click **Done**.

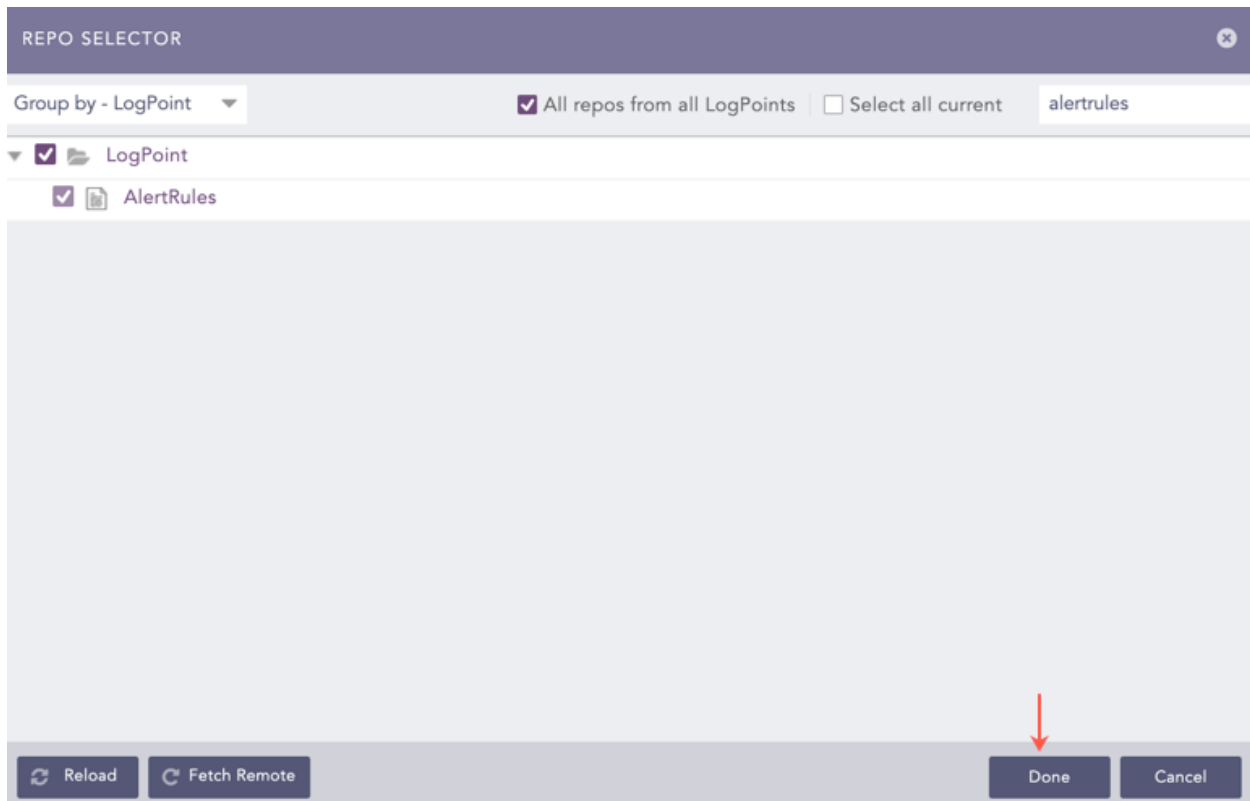


Fig. 2: Selecting Repos

6. Click **Ok**.

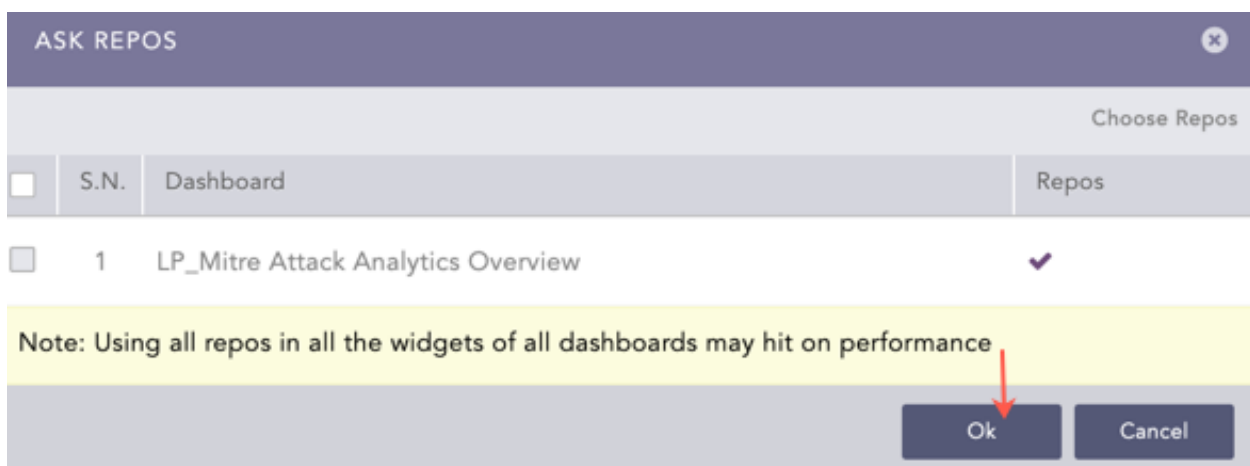


Fig. 3: Confirmation for Repo

You can find the Alert Rules dashboard under **Dashboards**.

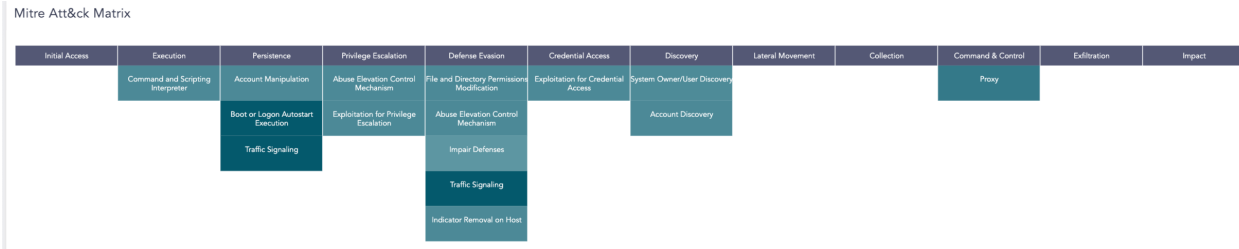


Fig. 4: Alert Rules Dashboard

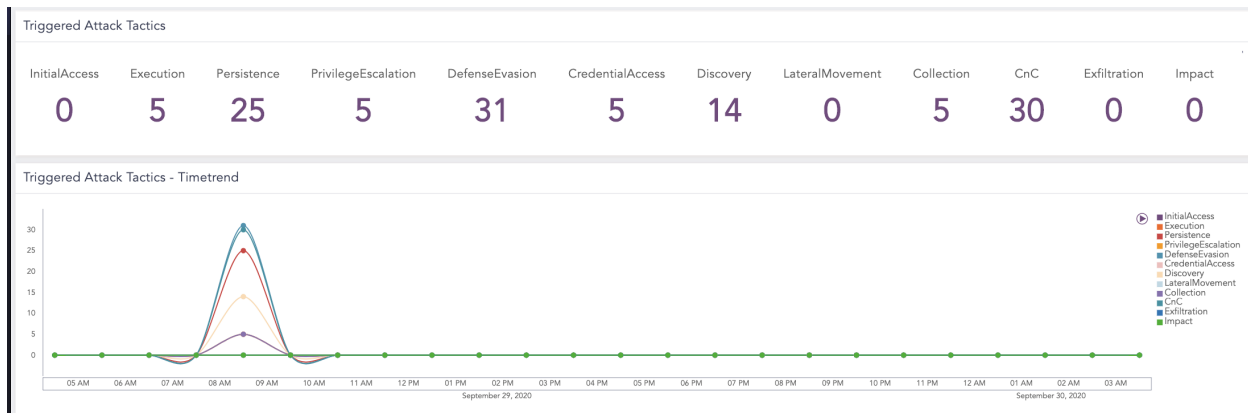


Fig. 5: Alert Rules Dashboard

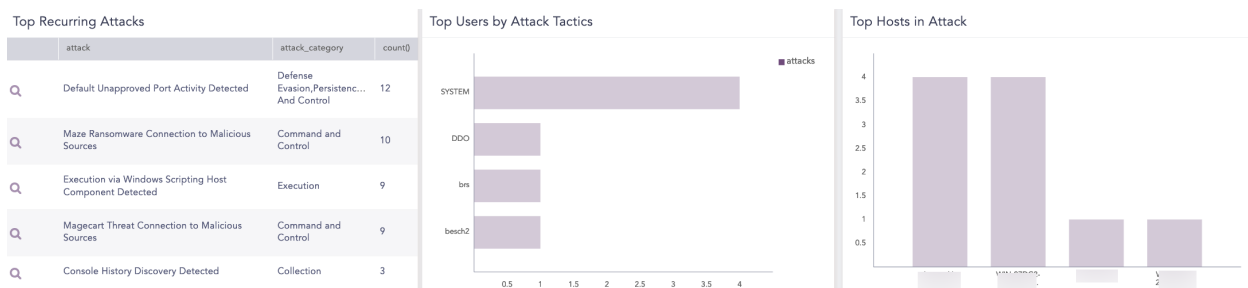


Fig. 6: Alert Rules Dashboard

4.2 Search Template

LP_Mitre Attack Analytics Overview: It stores the search queries that provides information on tactics triggered, attack tactics, recurring incidents, and attacks details.

4.2.1 Using the Salesforce Search Templates

1. Go to *Settings >> Knowledge Base* from the navigation bar and click **Search Templates**.

2. Select **VENDOR SEARCH TEMPLATES** from the drop-down, search and click **LP_Mitre Attack Analytics Overview**.
3. In **Update Parameters**, enter the required parameters.
 - 3.1 Select **Override widget time range** to set a time range for the search query.
 - 3.2 Select **REPOS** to choose repos which contains Alert Rules logs.
 - 3.3 Click **Update**.

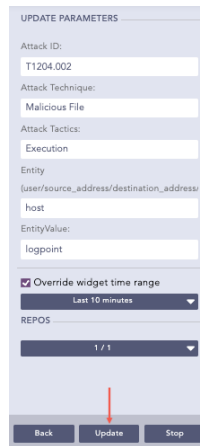


Fig. 7: Updating Salesforce Search Template

After updating, the widgets start displaying the result. Logpoint forwards you to **Search Template View** to access the dashboards of the search template.

KB-LISTS

- ABNORMAL_FILES
- ACTINIUM_DOMAINS
- ADMIN_GROUPS
- ADMIN_SOURCES
- ADMINS
- ALERT_IRC_PORT
- ALERT_OPEN_PORTS
- ALERT_PRESENT_EMPLOYEES
- ALERT_UNUSUAL_SOURCE
- ALLOWED_PORTS
- ATTACK_COMMANDS
- BAD_RABBIT_FILE
- BAD_RABBIT_HASH
- BLACKLIST_IPS
- BLACKLISTED_DOMAIN
- BLACKLISTED_IP
- BLACKLISTED_PORTS
- BLOCKED_APPLICATION
- CHROME_VPN_EXTENSIONS
- CLOUD_APP

- CLOUD_APPLICATION_IP
- CLOUD_APPLICATIONS
- CONCERNED_CONTENT
- CRIMINAL_CONTENT
- CRITICAL_FILE
- CRITICAL_FILES
- CRITICAL_FOLDER
- DEFAULT_USERS
- DOMAIN
- DOPPELPAYMER_RANSOMWARE_CVE
- DRAGONFLY_CNC_REQUEST
- DYNAMIC_CATEGORIES
- EXCLUDED_USERS
- EXECUTABLES
- EXISTING_USERS
- EXTREMIST_CONTENT
- GHOSTWRITER_IPS
- HERMETIC_WIPER_DRIVER_HASHES
- HIDDEN_COBRA_FILE
- HIDDEN_COBRA_HASH
- HIDDEN_COBRA_IP
- HOME_DIR
- HOME_DOMAIN
- HOME_FOLDER
- HOMENET
- HTTP_ERROR
- INACTIVE_USERS

- INVISIMOLE_MALWARE_HASHES
- KASPERSKY_DETECTED_MALWARE_HASHES
- KASPERSKY_UPDATE_FAILURES
- KNOWN_APPLICATIONS
- KNOWN_DOMAINS
- KNOWN_FILE
- KNOWN_SERVER_HOST
- LOCKERGOGA_FILES
- MAGECART_DOMAINS
- MAIL_SERVER_IP
- MAIL_SERVERS
- MALICIOUS_POWERSHELL_COMMANDLET_NAMES
- MALICIOUS_TOOLS_IMPHASH
- MALWARE_EMAILS
- MALWARE_FILES
- MALWARE_HASH
- MALWARE_IP
- MATRIX_FILE
- MAZE_RANSOMWARE_DOMAINS
- MAZE_RANSOMWARE_EMAILS
- MOST_EXPLOITABLE_CVE
- MOST_EXPLOITABLE_DOMAINS
- MOST_EXPLOITABLE_EMAILS
- MOST_EXPLOITABLE_HASHES
- MOST_EXPLOITABLE_IPS
- NEFILIM_RANSOMWARE_EMAILS
- NEFILIM_RANSOMWARE_HASHES

- NON_EXISTING_USERS
- NON_PCI_COMPLIANT_PORT
- POWERSPLOIT_RECON_MODULES
- PRIVILEGED_USER
- PROWLI_CVE
- PROWLI_DOMAIN
- PROWLI_EMAIL
- PROWLI_FILE
- PROWLI_HASH
- SERVER_ADDRESS
- SQL_INJECTION_CHARACTER
- SQL_INJECTION_CHARACTERS
- SUSPICIOUS_COUNTRY
- UNAPPROVED_PORT
- VULNERABLE_CONTENT
- VULNERABLE_WORKSTATIONS
- WANNACRY_DOMAIN
- WANNACRY_EXTENSION
- WEBSERVER_SYSTEMS
- WINADMINS
- WINDOWS_DC
- XSS_TAG
- YOUTUBE

For more details on Lists, go to the [Lists](#) section in the *Logpoint Data Integration guide*.